

ELECTRIC BUILT-IN RANGE

Featuring Wave-Touch® Electronic Controls



SIGNATURE FEATURES



PERFECT TASTE[™] DUAL CONVECTION

For consistently delicious taste and texture, our dual-fan convection circulates air more evenly throughout the oven for an even cook. Two variable speeds work in tandem with three heating elements (bake, broil, and convection) to give you delicious results every time.



PERFECT TASTE[™] TEMP PROBE The Perfect Taste[™] Temp Probe lets you cook each dish to perfection. It does more than measure temperature — it alerts you when food has reached the desired temperature and automatically adjusts to the Keep Warm setting so you never overcook your food and deliver perfect results every time.



FLEX-2-FIT[®] COOKTOP ELEMENTS

Adjusts up to three sizes, giving you the freedom to cook a variety of delicious dishes. Achieve powerful cooking versatility with increased burner wattage.

bake	broil	► Sel conv bake	> Conv roast	► S keep warm	- slow cook	• Dread proof	► ¢ clean	
perfect turkey	► > Xo ė́s	الله من الله من hydrate	(1) my favorite	2 my favorite	(3) favorite		lite •• med	
12 multi stage	options	► (¬Ĵ¢öti	► JTE	Probe	>> rapid preheat	conv convert	heavy	

MULTI-STAGE COOKING

Create great taste with ease. With Multi-Stage Cooking, an Electrolux oven is a built-in sous chef, helping you conquer delicious by adjusting between seven professionally inspired cooking modes, including Bake, Broil, Convection Bake, Convection Roast, Convection Broil, Keep Warm and Slow Cook.

EW30ES80RS

PRODUCT DIMENSIONS

Height	36-5/8"
Width	30"
Depth	28-5/16"

MORE EASY-TO-USE FEATURES

PERFECT TURKEY® BUTTON

Ensures moist, delicious poultry. Imagine stress-free holiday cooking as the Perfect Taste[™] Temp Probe helps you deliver a perfectly cooked turkey.

SELF-CLEAN PORCELAIN RACKS

Bake, roast, broil, savor — the cleaning's on us. Our porcelain racks are safe to stay inside of the oven during the self-clean cycle, eliminating the mess and inconvenience of removing and cleaning racks by hand.

PERFECT PAIR OVENS®

A versatile main oven and a second complementary oven combine for total cooking capability. Use both simultaneously to cook two different items at two different temperatures.

EASY-TO-CLEAN COOKTOP SURFACE

Smooth glass cooktop makes cleanup a breeze.

LARGE CAPACITY

Coordinate an entire meal — our ovens feature 4.6 cu. ft. of cooking space with three adjustable baking racks.

RAPID PREHEAT

Preheat in just a few minutes.1

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes 3-year coverage on parts and one year on labor. 2

WAVE-TOUCH[®] CONTROLS

One simple touch and the control panel activates, showing your cooking options. After you make your choice, all but the options selected will fade away, returning to an elegant display.

ADA COMPLIANT

When properly installed, this model is A.D.A.-qualified based on the United States Access Board's A.D.A./A.B.A. Accessibility Guidelines and the Department of Justice's 2010 A.D.A. Standards for Accessible Design.

Available in:

Stainless (S)	

ELEMENTS	WATTS
6 to 9 to 12" Triple Expandable Element	1,000/2,000/2,700
6 to 9" Dual Expandable Element	1,400/3,000
5 to 7" Dual Expandable Element	750/1,800
6" Electric Element	1,200
6" Center Electric Element	1,200

Based on single rack cooking performance, not set temperature, using Rapid Preheat. Eligibility based on product registration with Electrotux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. Coverage includes material parts for 3 years and labor for 1 year.


ELECTRIC BUILT-IN RANGE

EW30ES80RS



30" ELECTRIC BUILT-IN RANGE

CONTROL PANEL FEATURES	
Wave-Touch® Electronic Oven Control	Yes
Perfect-Set® Element Controls	Yes
Keypad Entry of Time & Temperature	Yes
Electronic Clock & Timer	Yes
Temperature Display	Yes
Automatic Oven (Delay, Cook & Off)	Yes
COOKTOP FEATURES	
Flex-2-Fit® Ceramic Glass Smoothtop	1
6 to 9 to 12" Triple Expandable Element – 1,000W/2,000W/2,700W	1
6 to 9" Dual Expandable Element – 1,400W/3,000W	1
5 to 7" Dual Expandable Element – 750W/1,800W	1
6" Electric Element – 1,200W	1
6" Center Electric Element – 1,200W	1
OVEN FEATURES	
Capacity	4.6 Cu. Ft.
Hidden Bake Element	Yes
Eight-Pass Bake Element – 2,500 Watts	Yes
Six-Pass Broil Element – 3,400 Watts	Yes
Convection Element – 2,500 Watts	Yes
Cobalt Blue Interior	Yes
Self-Clean Options with Door Lock	Yes
Perfect Convect ^{3®} with Variable 2-Speed Fan	Yes
Cooking Modes – Bake, Broil, Convection Bake, Convection Roast, Convection Broil, Keep Warm, Slow Cook	7
Baking Options – Perfect Turkey [®] , Defrost, Dehydrate, Bread Proof, My Favorites, Multi-Stage Cooking, Temperature Probe, Rapid Preheat, Delay Bake, Convection Convert	10
Luxury-Design® Lighting with Dual 25W Halogen Bulbs	Yes
Luxury-Glide® Racks	1
Conventional Racks	2
Convection Roasting Rack	Yes
ADDITIONAL FEATURES	
Extra-Large Glass Window	Yes
Perfect Pair Lower Oven®	Yes
Adjustable Leveling Legs	4
Sabbath Mode (Star-K® Certified)	Yes
A.D.A. Compliant*	Yes
ACCESSORIES	
Porcelain Broiler Pan and Insert	Included
Cleaning Sponge	Included
Meat Probe	Included
2" Rear Filler Kit – PN # 903113-9010	Optional
Side Panel Kit – PN# A01529901	Optional
SPECIFICATIONS	
Color –	
Stainless Steel	S
Power Supply Connection Location	Right Bottom Rear
Connected Load (kW Rating)@240/208 Volts	15.6/11.7
Amps@240/208 Volts	39/38
Minimum Circuit Required (Amps)	40A
Shipping Weight (Approx.)	245 Lbs.
When properly in the protocol of the standard	rd's A.D.A./A.B.A. e Design.

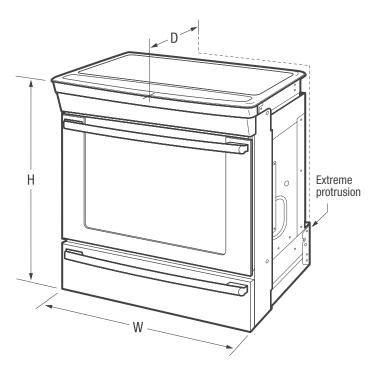

Height (Adjustable)	36-5/8"
Width	30"
Depth (to Center of Arc) (with 90° Door Open)	28-5/16" 47-9/16"
OVEN CAVITY DIMENSIONS	
Height	17-1/2"
	17-1/2" 24-1/8"




Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

ELECTRIC BUILT-IN RANGE

EW30ES80RS

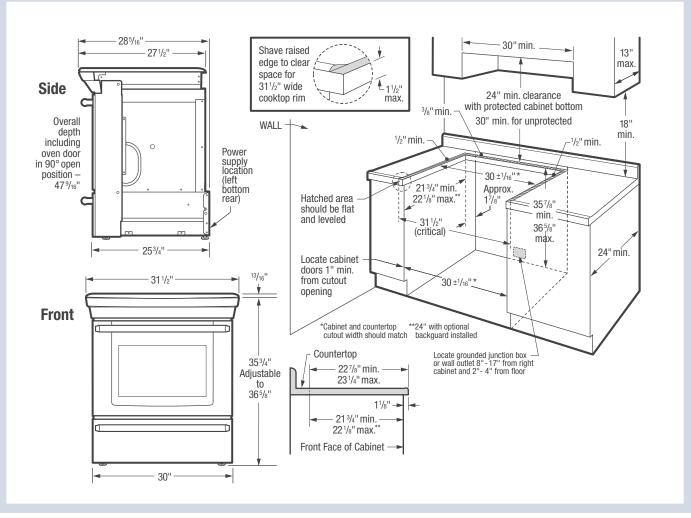

30" Electric Built-In Range Specifications

- Product Weight 220 Lbs.
- Single phase 3- or 4-wire cable, 120 / 240 or 120 / 208 Volt, 60 Hertz, fused on both sides of line with ground. (If local code permits, range may be connected by hard-wiring or by means of power supply cord kit.)
- Connected Load (kW Rating) @ 240 / 208 Volts = 15.6/11.7 kW
- Amps @ 240 / 208 Volts = 39/38 Amps
- Recommended Circuit Breaker 40 Amps
- Always consult local and national electric codes.
- Make sure wall coverings around range can withstand heat generated by range.
- Linoleum or any other synthetic floor covering located beneath range, must be capable of withstanding minimum heat of 90° F above room temperature without shrinking, warping or discoloring. Insulating pad or 1/4"-thick plywood required between range and a carpeted floor.
- Countertop MUST be level in all directions and adjustable range height at least 1/16" greater than tallest cabinet height, to ensure metal rangetop flange will fit properly on countertop edge.
- When installing optional Backguard Kit, cutout depth of 21-3/4" minimum / 22-1/8" maximum needs increased to 24".
- · Overhead cabinetry should not exceed a 13" maximum depth.
- Absolute minimum horizontal distance between overhead cabinets installed to either side of appliance must be no less than maximum width of appliance.
- Allow 24" minimum clearance between rangetop and bottom of cabinet when bottom of wood or metal cabinet is protected by not less than 1/4" flameretardant millboard covered with not less than No. 28 MSG sheet steel,

0.015" stainless steel, 0.024" aluminum or 0.020" copper. Allow 30" minimum clearance when cabinet is unprotected.

- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.
- When installing range into existing cutout depth greater than 22-1/8", optional 2" Rear Filler Kit available

Countertop Preparation

For detailed preparation instructions, refer to installation guide on the web.

- Flat square-finish (flat) countertop requires no preparation since rangetop flange lays directly on countertop edge.
- Formed front-edged countertops require front molded edge to be shaved flat 3/4" from each front corner of opening.
- Tile countertops may need cut back 3/4" from each front corner of opening and / or rounded edge flattened.
- For existing cutout width greater than 30-1/16" reduce the 3/4" overlap dimension or for cutout width of 29", replace actual side trim panels with smaller side trim panels, available with optional Side Trim Kit (refer to detailed kit installation instructions)

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.com for detailed instructions.

Optional Accessories

- 2" Rear Filler Kit: Black (PN # 903113-9010).
- Side Panel Kit: Black (PN # A01529901).



Electrolux Major Appliances, N.A.

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-877-4electrolux (1-877-435-3287) • electroluxappliances.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EW30ES80R 10/15

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Electrolux