

Finesse™

Frameless sliding shower door 5475-59

Features

- Frameless
- 1/4" (6 mm) thick tempered glass
- CleanCoat®+ glass coating creates a hydrophobic barrier that repels water, soap scum, and residue, saving time and protecting shower doors 10 times longer than original CleanCoat. (Based on 2021 internal wear/abrasion testing using a microfiber cloth.)
- Tempered glass ensures enhanced safety and durability
- Interior and exterior towel bars complete the look of this door

Material

Anodized aluminum prevents rust and corrosion

Installation

- Out-of-plumb adjustability simplifies installation
- Not for use in hospitality
- For residential use only



Codes/Standards

ANSI Z97.1 CAN/CGSB-12.1 CPSC 16CFR 1201

STERLING® Bath and Shower Doors Five-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
| | N | Nickel |
| | Ν | Nickel |
| | PBL | Matte Black |
| | PBL | Matte Black |
| | S | Silver |
| | S | Silver |
| | DR | Deep Bronze |
| | DR | Deep Bronze |

Available Glass Options

| = |
|-------------------------|
| $Boxwood^{\mathsf{TM}}$ |
| Cirkette™ |
| Clear |
| |


Code Description

Clear
Frosted
Grafite™
Lake Mist™



Finesse™

Frameless sliding shower door 5475-59

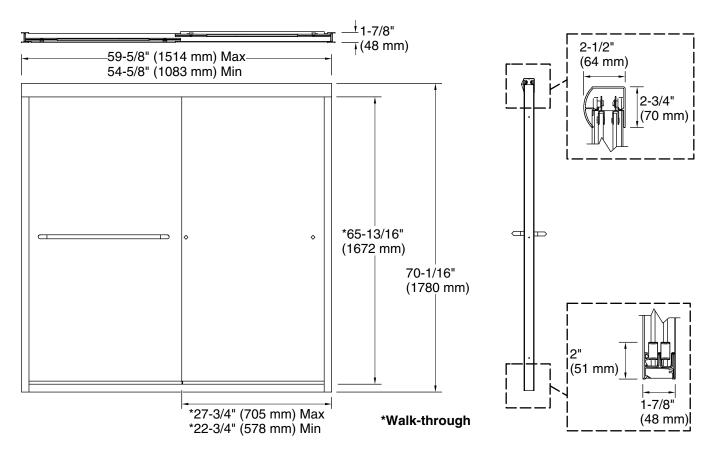

Technical Information

All product dimensions are nominal.

Base-To-Wall

1/2" (13 mm)

Radius - Max:

Shower Ledge Min 2-1/8" (54 mm)

Flat:

Shower Wall Min 2-11/16" (68 mm)

Flat:

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 72-7/16" (1840 mm) to allow for installation clearance.