

INSTALLATION STEPS

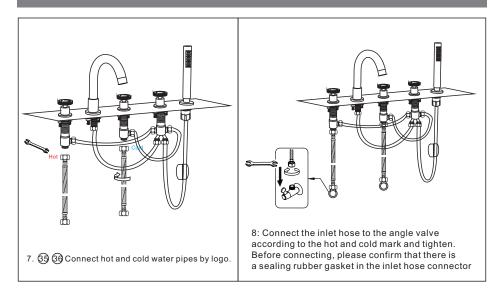

Care and Maintenance

regularly to clean the mixer.





- Wash faucet with clean water, and wipe with soft cotton cloth.
- Avoid using cleaning powder, harsh cleaning chemicals, brushes, and cloth with coarse surface to prevent scratching and corrosion.
- Do not use acidic cleaning agents for washing the faucet as it may cause corrosion on the surface of faucet. Rinse off with water immediately if the faucet in contact with harmful acidic agents.

If must carry on the massive clearing, please obey the following procedure:


- 1. Use clear water and the soft cloth, eliminate the superficial dirt and the filthy membrane as far as possible;
- 2. Use the any following cleanser to remove the superficial dirt and the filthy membrane;
- Temperate liquid cleanser.
- The colorless glass cleaner, does not have the powdery cleanser which the abrasive action and can dissolve completely (according to instruction mix).
- Polish liquid which does not abrasive action.
- **3.** After cleanly, please remove the complete cleansing agent with the clear water, and wipes with soft cotton fabric.

Instruction Manual

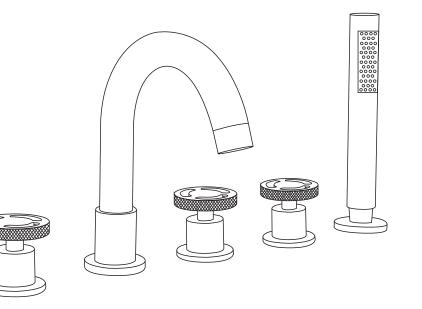

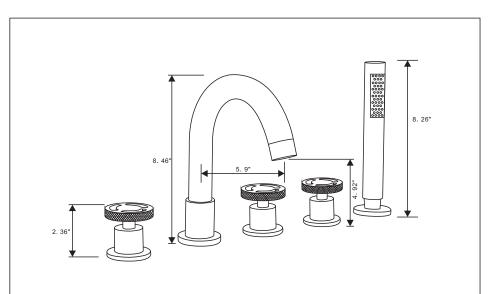

PACKING ACCESSORIES

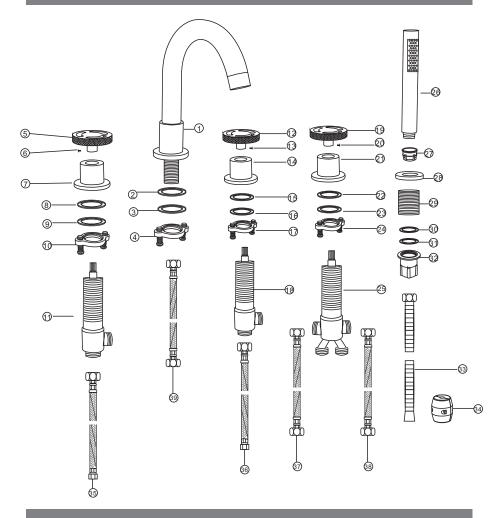


INSTALLATION OF BASIN FAUCET

There are seven steps to installing a faucet:


1. First, prepare the installation tool. Check whether the parte are complete before installation. Common faucet parts include: hose, rubber ring, etc. In addition, waterproof tape should be prepared.

- 2. Check if the main valve of water supply is closed.
- 3. Use a waterproof tape to wrap a few turns in the clockwise direction on the thread of the faucet. (This is very important. The direction of the waterproof tape must be tangled clockwise. If twint revrsely, it will leak, which means that the direction of the waterproof tape winding is opposite to the direction of he faucet thread).
- 4. Install the faucet following the graphic instruction below.
- 5. Open the main valve of the water supply, normal water can be used.
- 6. The thread size is 9/16, it's meets the installation needs of most American house.
- 7.Button is functional when water pressure is applied.


INSTALLATION STEPS



Make sure there are 5 mounting holes in the panel. (1)The main body is put into the hole 6 the following installation nut into 234, and the main body link.



2. ⑤⑦ The main body on the panel, ⑤each ① links installed, lock the main body with a hexagonal spoon (5), Tighten the nut again.



3. (9 2) The main body on the panel, (19) each (25) links installed, lock the main body with a hexagonal spoon (9, Tighten the nut again.

