

INSTALLATION INSTRUCTIONS FOR 346-14-PL

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to loose any small parts necessary for installation.
3. Attach the crossbar(A) to the junction box with the two junction box screws(B) as shown. The side of the crossbar marked "GND" must face out.
4. Thread the nipple(C) part way into the center hole of the crossbar with the hex nut (E).
5. Connect the wires as described under "Connecting the Wires".

CONNECTING THE WIRES (Fig.2)

7. Connect the fixture wires to the junction box wires as shown in the Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no green ground wire from the junction box, connect the fixture ground wire to the crossbar with the green screw (D) provided. Note: Twist wires in the same direction, connect the wire connector onto wires.

COMPLETING THE INSTALLATION (Fig.1)

8. Place the fixture body (F) over the nipple(C) so the nipple protrudes through the center hole. Holding the fixture in place, thread the cap nut (G) onto the end of the nipple until fixture is secure to the wall.
9. Install the light bulbs(I) in accordance with the fixture's specification use PL (spiral tubes) for your fixture (2xMax 13W included): DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
10. Place the glass shade (I) into the fixture.

Your installation is now complete. Return power to the junction box and test the fixture

Fig.1




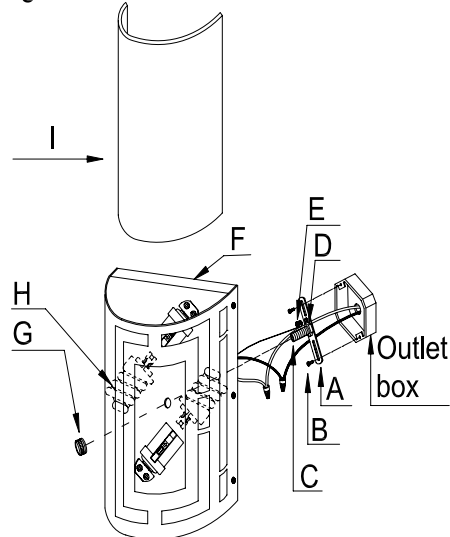


Fig .2

FIXTURE WIRES Black	FIXTURE WIRES White	FIXTURE WIRES Green or Bare Copper (Ground)
		
HOUSE WIRES Black (Hot)	HOUSE WIRES White (Neutral)	HOUSE WIRES Green or Bare Copper (Ground)

MIN 90°C SUPPLY CONDUCTORS

