


KNOCKOUTS		
SYMBOL	CONDUIT SIZE	
	IN	MM
A	.50	13
B	.75	19
C	1.00	25
D	1.25	32
E	1.50	38
F	2.00	51
G	2.50	64
H	3.00	76

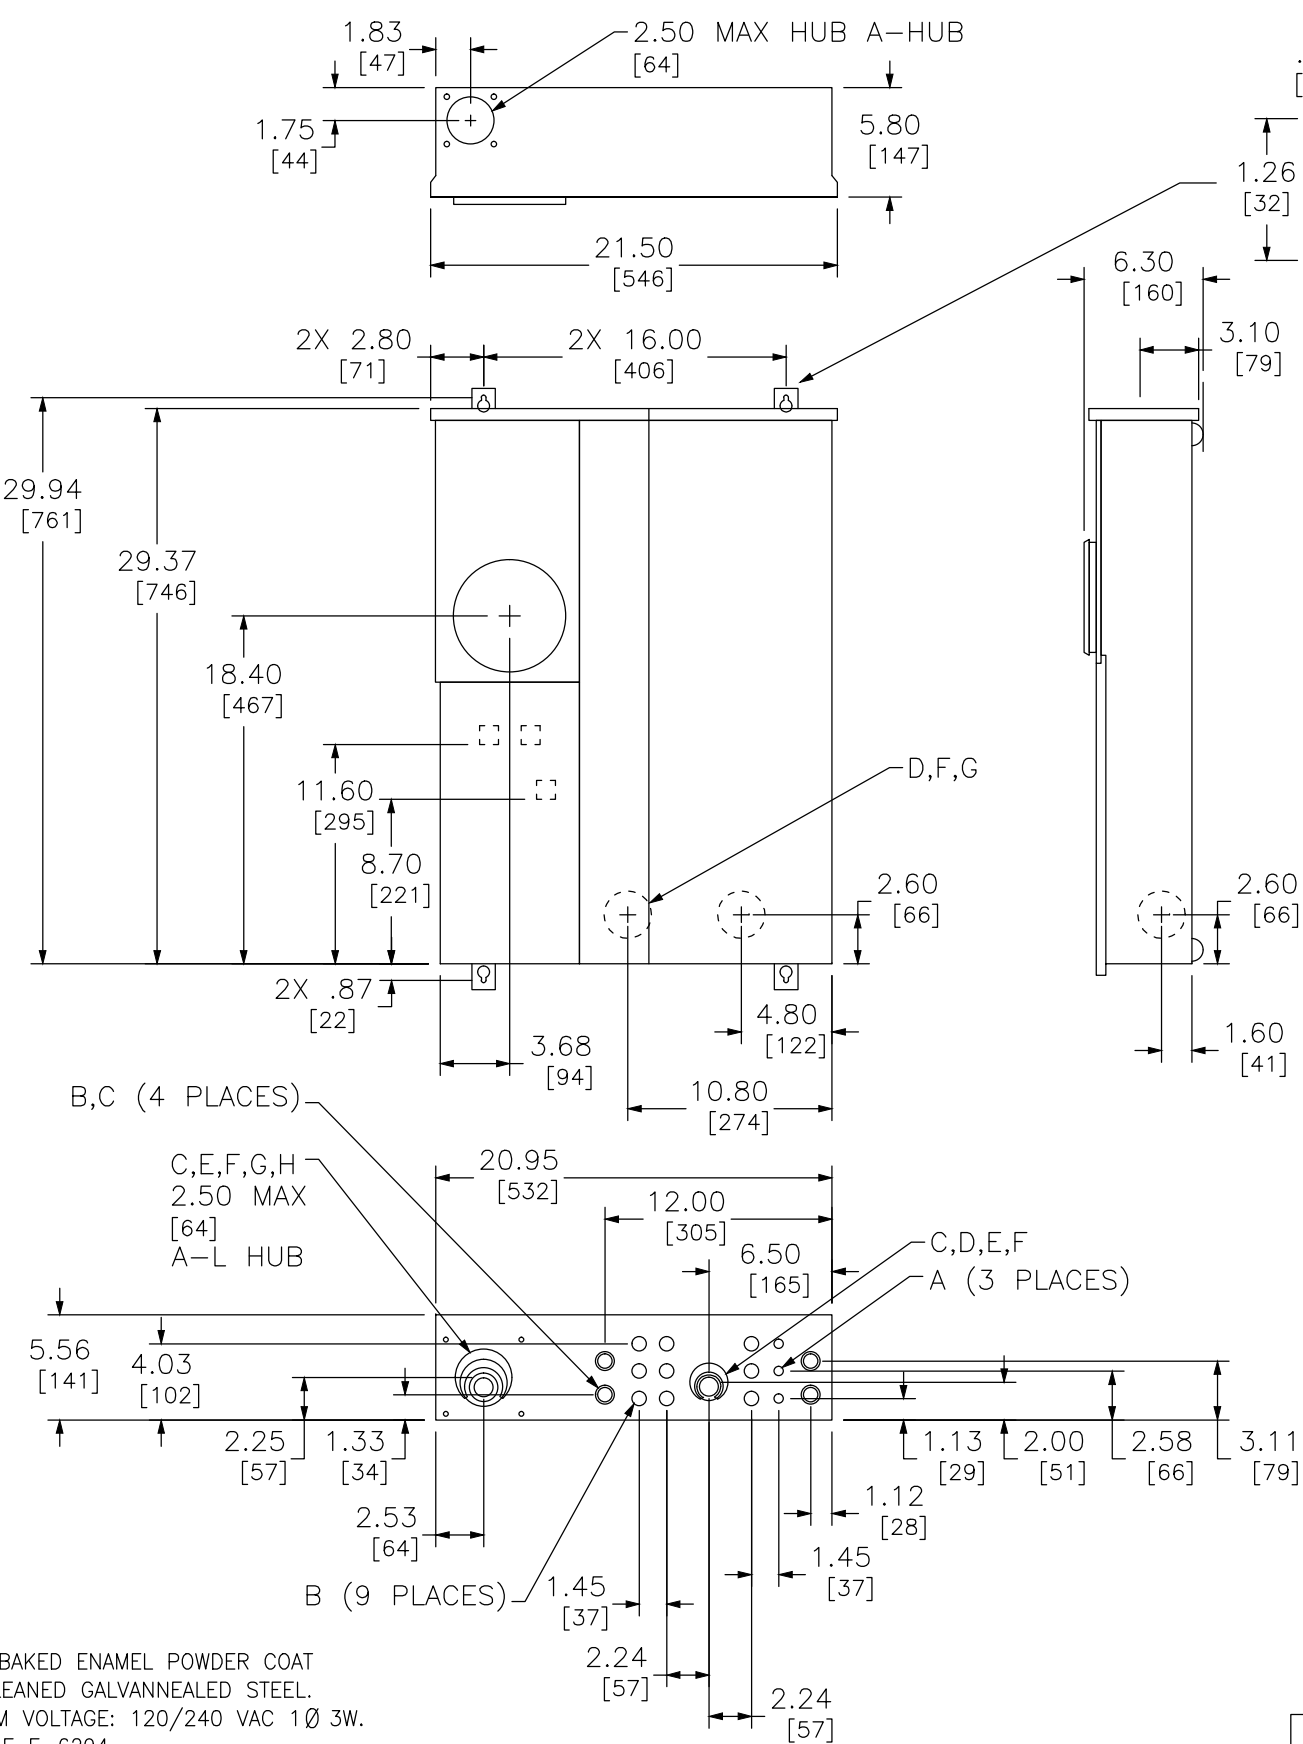

NOTES:
FINISH - GRAY BAKED ENAMEL POWDER COAT
PAINT OVER CLEANED GALVANNEALED STEEL.
MAXIMUM SYSTEM VOLTAGE: 120/240 VAC 1Ø 3W.
UL LISTED - FILE E-6294
SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.
SUITABLE FOR UNDERGROUND/OVERHEAD SERVICE.
MEETS EUSERC SPECIFICATIONS.

SC2040M200PS

DUAL DIMENSIONS: INCHES
MILLIMETERS

AMPERE RATING	FACTORY INSTALLED BYPASS TYPE	SHORT CIRCUIT CURRENT RATING	CATALOG NUMBER	SERIES	SPACES	MAXIMUM NUMBER OF SINGLE POLE HOM CIRCUITS	LINE SIDE PHASE & NEUTRAL LUGS (AWG/KCMIL)	LARGE BRANCH NEUTRAL AWG
200	NONE	22K	SC2040M200PS	M01	20	40	#4-250 CU/AL	#14-2/0 CU/AL

COMBINATION SERVICE ENTRANCE DEVICES
RING TYPE
RAINPROOF NEMA TYPE 3R ENCLOSURE
SURFACE ONLY



DWG#
NO.