

INSTALLATION MANUAL

CEILING FAN WITH LIGHT

Model No.: WY001-01




Scan for Installation Video



APP Control Applicable


Thank you for choosing and using our product.

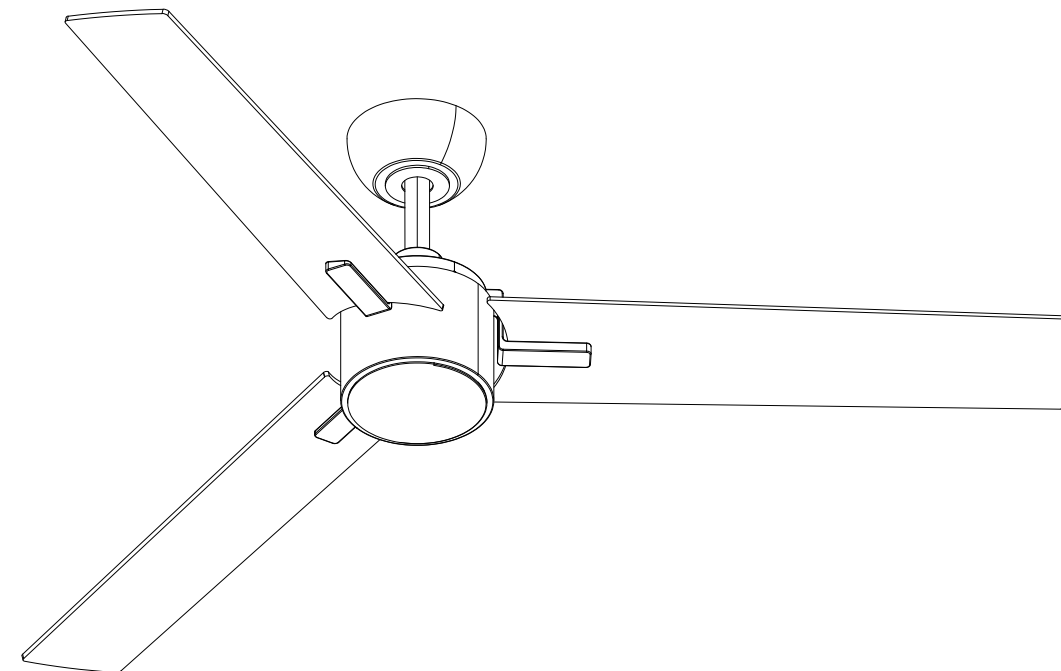


TOOLS REQUIRED




Ladder



Pliers




Wire Strippers




Screwdrivers

PACKING LIST

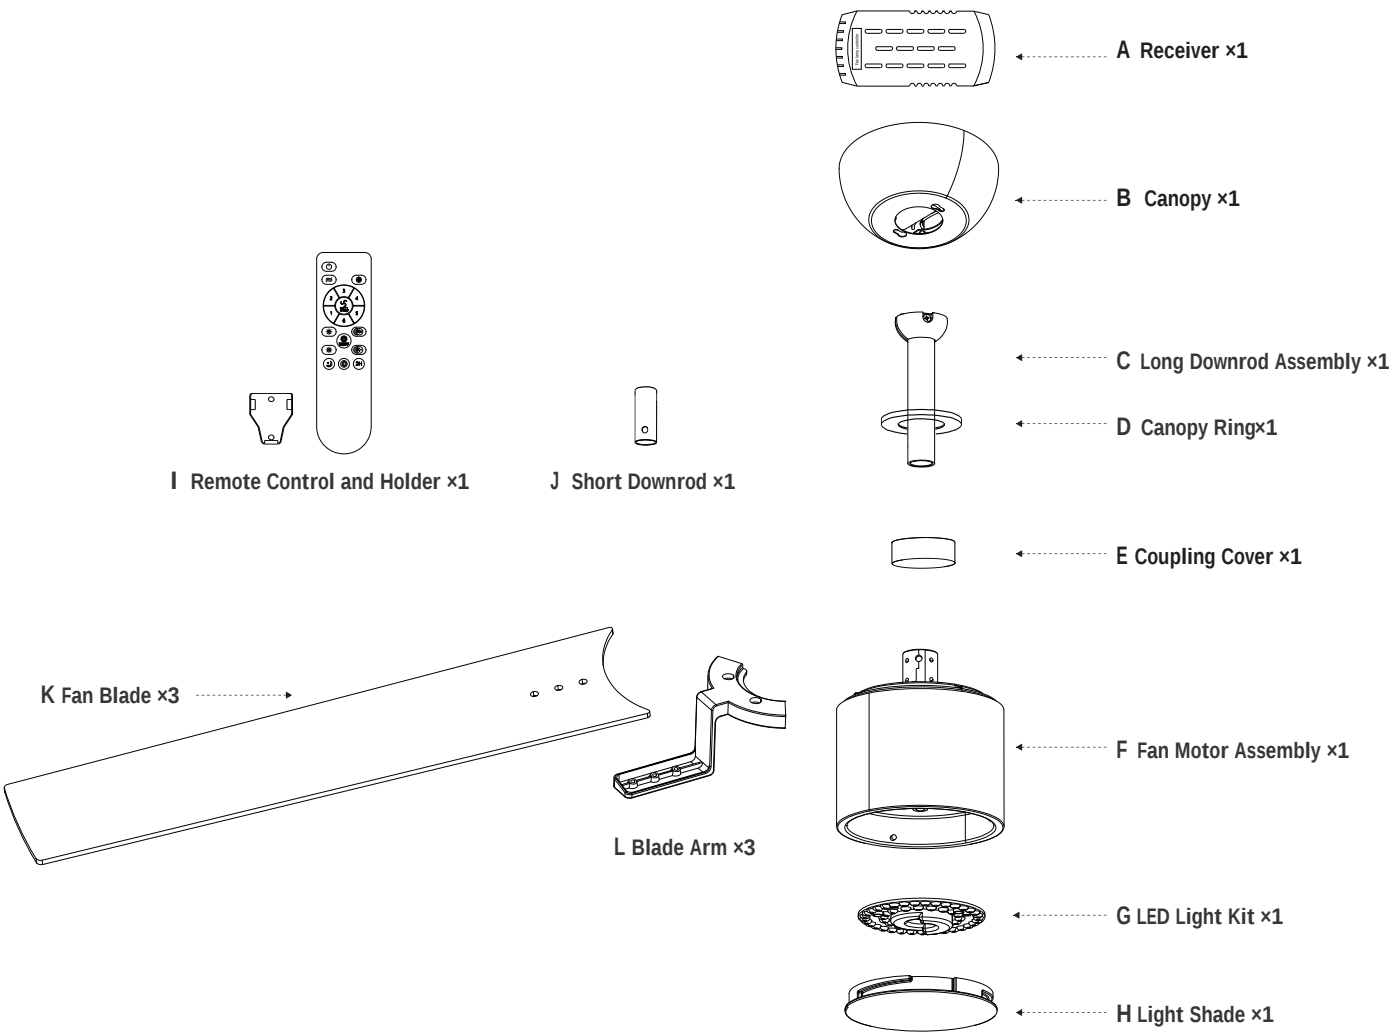

INSTALLATION KIT


AA  Wire Nut	3×	BB  Fan Blade Screw with Washer	9×	CC  Gloves	1×	DD  Fan Blade Arm Screw	6×
EE  Mounting Bracket	1×	FF  Outlet Box Screw With Washer	2×	GG  Clevis Pin&"R" Pin	1×	HH  Magnet	2×

- NOTE:
- 1. Some extra hardware may be included. The quantity listed above is the number required for installation.
 - 2. Parts "GG" have already been installed with Long Downrod Assembly. Parts "DD" have already been installed with Fan Motor Assembly. They need to be disassembled before installation.
 - 3. Parts "HH" have already been installed with Canopy Ring.

INSTALLATION


1. Assembling the Fan

- Step 1. Assemble the Canopy and coupling cover, route wires from the fan through the downrod.
- Step 2. Loosen the set screw from the yoke but do not take off, align the holes at the bottom of the downrod with those in the yoke.
- Step 3. Carefully insert the clevis pin (GG) through the holes in the yoke and downrod (Be careful not to jam the clevis pin against the wires inside the downrod).
- Step 4. Insert the "R" pin (GG) into the end of the clevis pin.
- Step 5. Tighten the set screw on the yoke to secure the downrod.

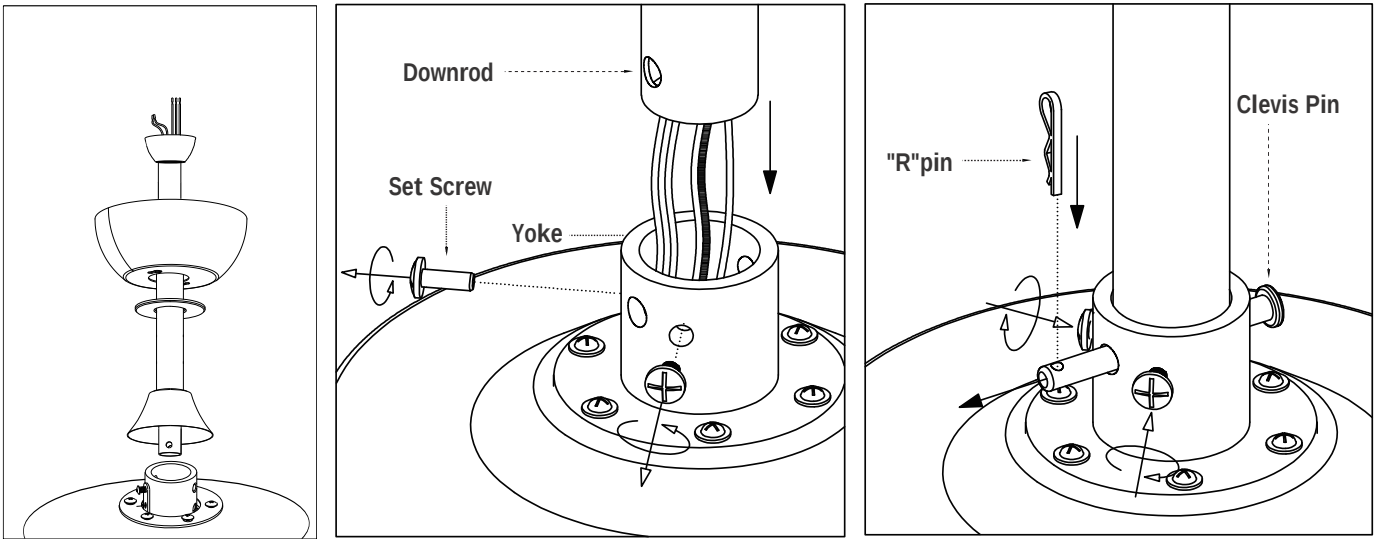


2. Installing the Mounting Bracket

- Step 1. Take off the screws from outlet box.
- Step 2. Secure the mounting bracket (EE) onto the outlet box with screws taken off or Outlet Box Screw With Washer (FF) provided.

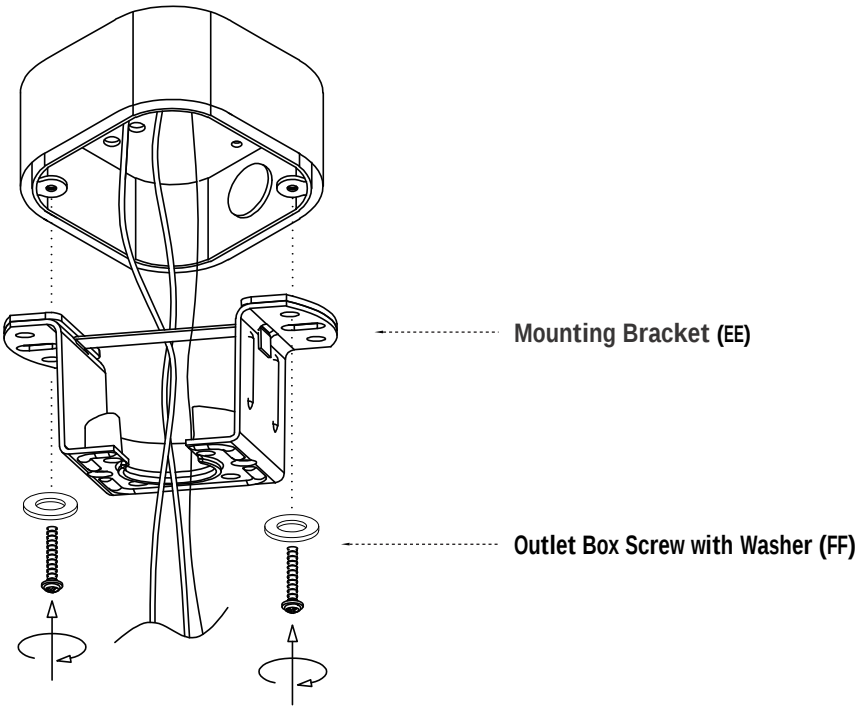

3. Hanging the Fan

Step 1. Lift the downrod into the mounting bracket. Rotate the downrod until the seat tab in the mounting bracket is seated in the groove in the downrod ball.

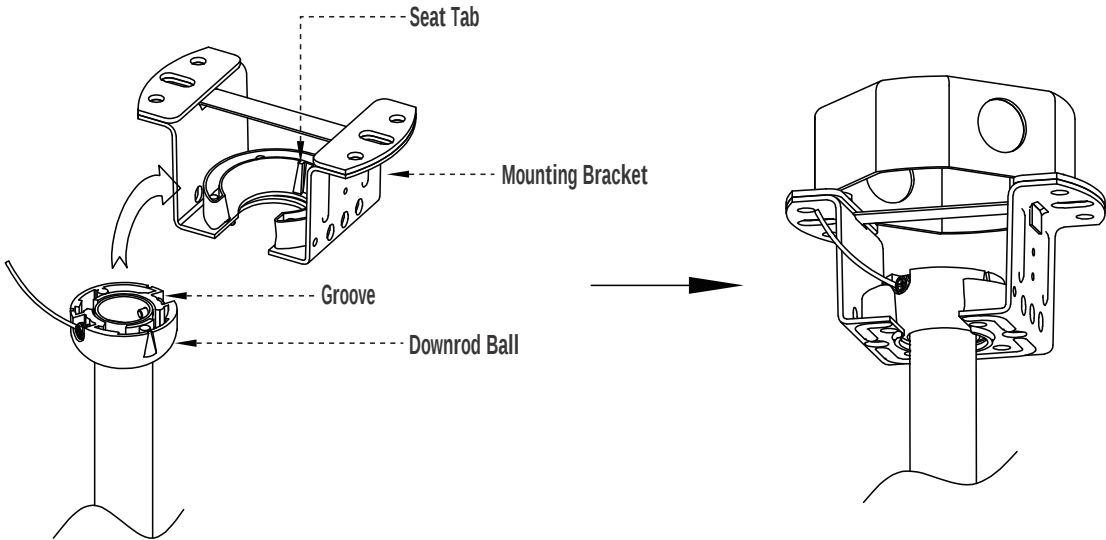


4. Wiring

Step 1. Insert the receiver to the mounting bracket

Step 2. Connect the wires from the fixture to the house supply wires with wire nuts (AA) , ground wire (green, green/yellow, or bare copper) to ground wire, neutral wire (white or blue) to neutral wire, and hot wire (black or brown) to the hot wire.

Step 3. Wrap the connection with electrical tape.

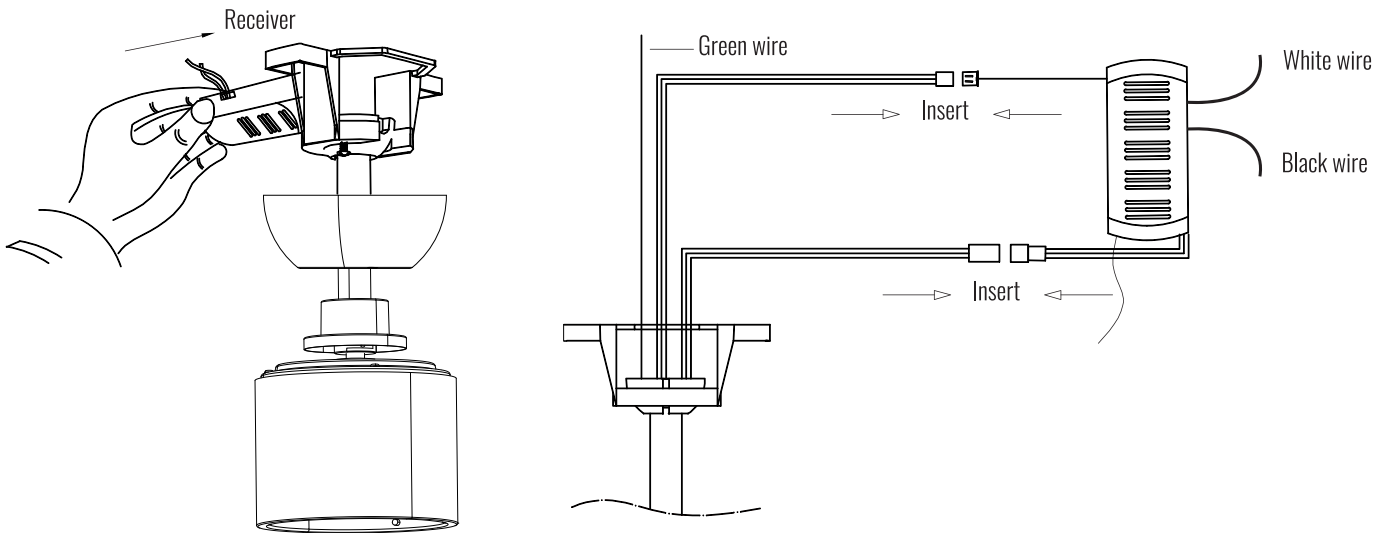


- Note:
- ① This fan only needs one set of input wires (black, white, and ground wire). Both of the fan and lights will be controlled by the remote control.
 - ② This fan can only be connected to an on/off switch, not other dimmer switch.

5. Attaching the Canopy

Step 1. Slide the canopy up to the ceiling and attach it to the mounting bracket with the set screws provided.


Step 2. Slide the coupling cover downward to cover the yoke and fix the canopy ring to the canopy with Magnet (HH).

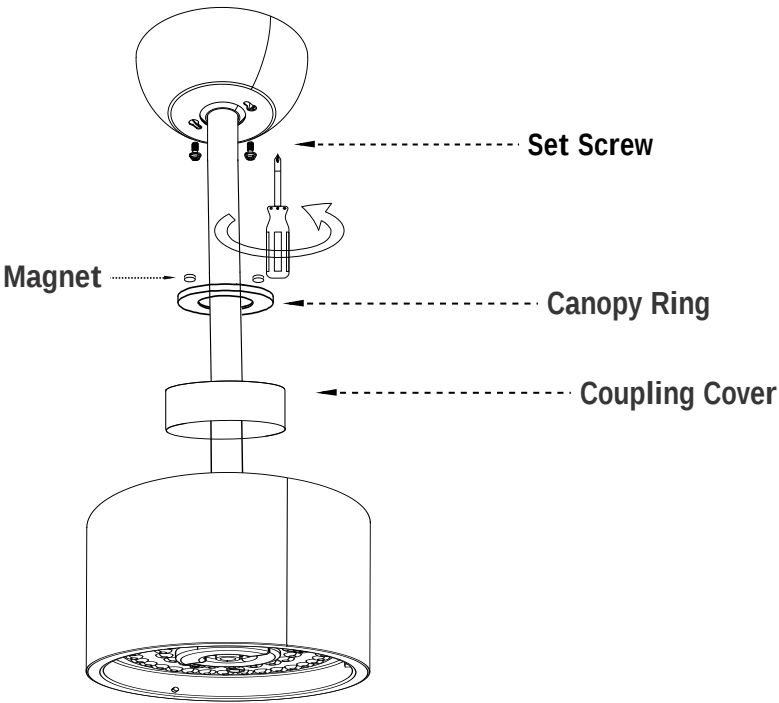

6. Installing the Blade Arm


Step 1. Loosen the Fan Blade Arm Screw (DD) from the motor.

Step 2. Attach the Fan Blade Arm onto the motor with the Fan Blade Arm Screws (pre-installed on the motor).

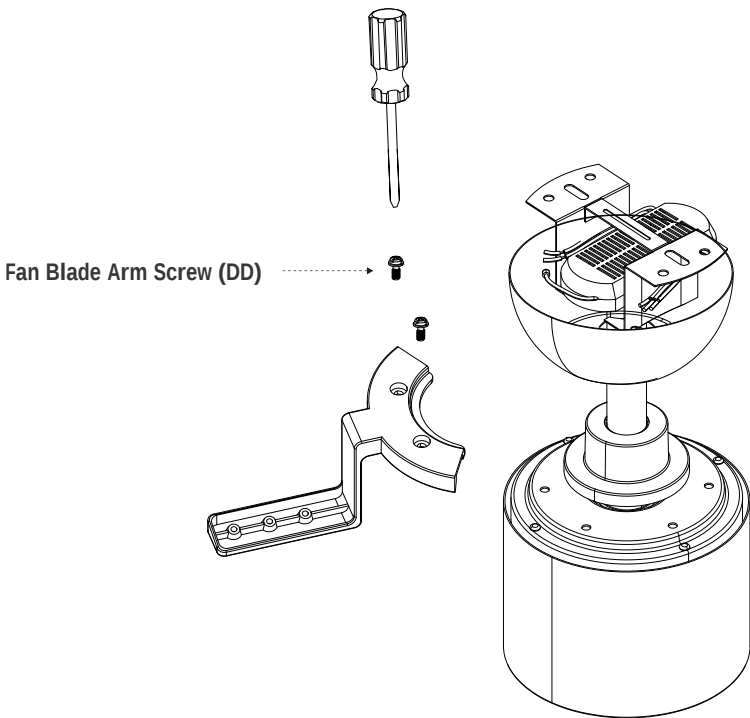


7. Installing the Fan Blade

Step 1. Attach fan blade onto the blade arms with Fan Blade Screws with Washer (BB) provided.

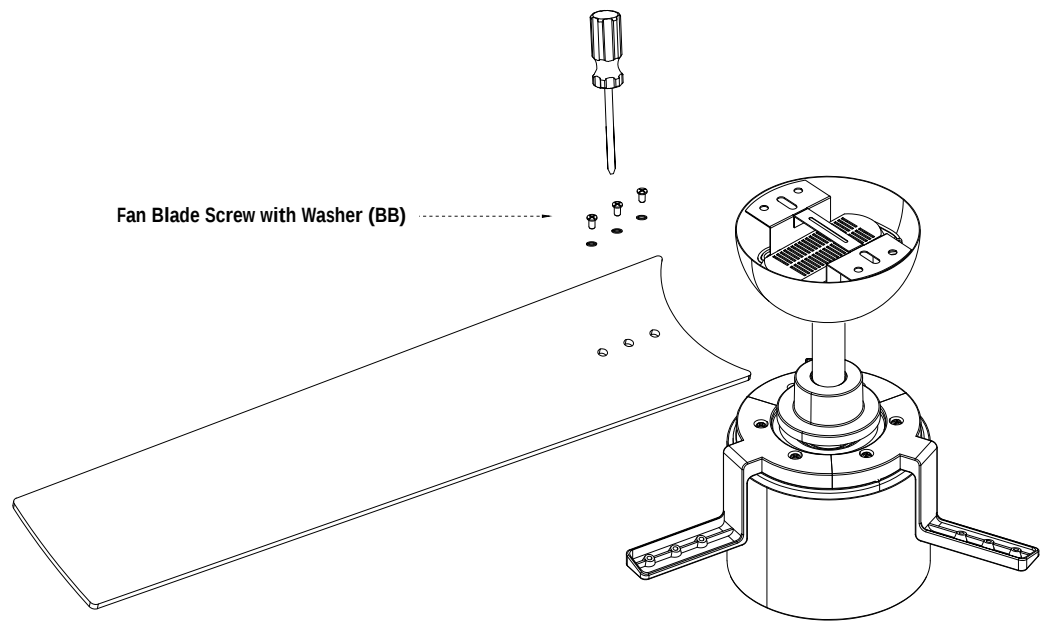


8. Install the Light and Light Shade

Step 1. Connect the wire terminal to the interface on the LED Light Kit.
Step 2. Rotate the Light Shade clockwise to secure it to the Light Kit Mounting Plate.

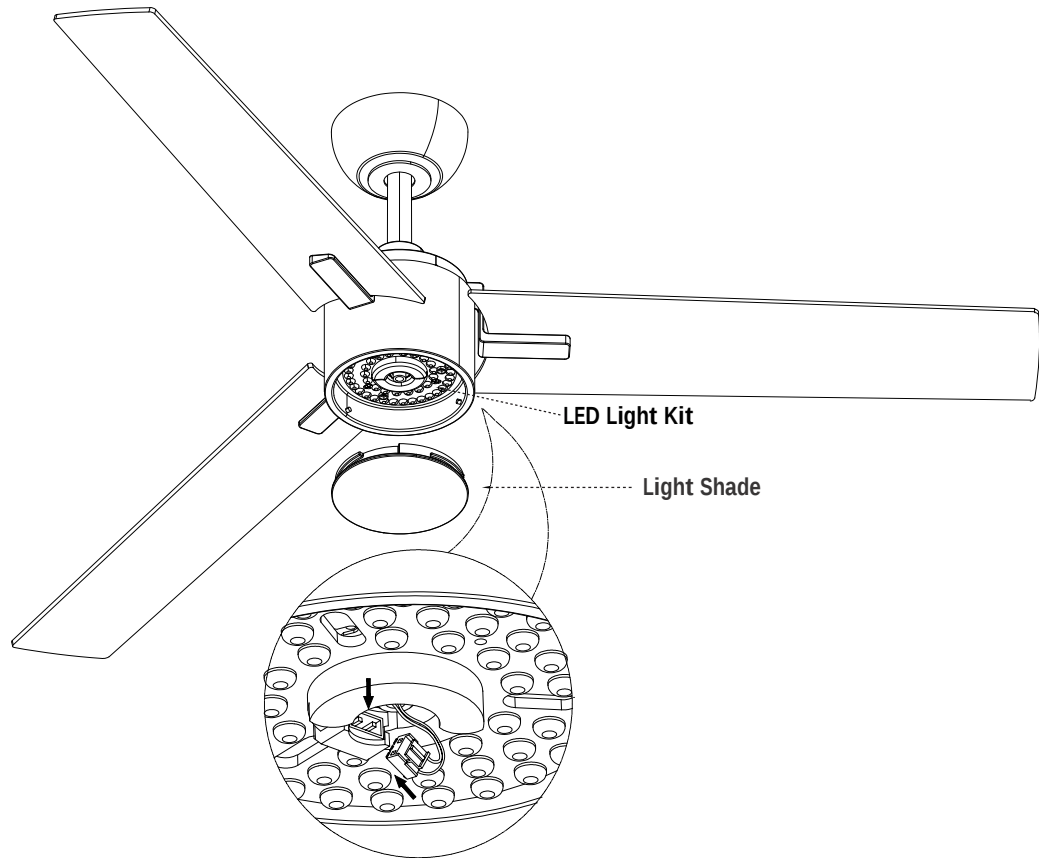

REMOTE CONTROL INSTRUCTIONS


- ① : Turn off power.
- ② : Natural wind, fan speed will change automatically with this function.
- ③ ⑤ ⑪ ⑫ ⑬ ⑭ : Turn on the fan on 1/2/3/4/5/6 speed.
- ④ : Turn off the fan.
- ⑩ : Fan moves forwards or reversely.
- ⑥ ⑦ : Adjust the brightness of the light.
- ⑮ ⑰ : Adjust the light color temperature.
- ⑯ : Turn on / off the light.
- ⑧ : Night mode, dim the lights.
- ⑨ : Quick switch of the light color: warm white→cool white→daylight white.
- ⑱ : 2H for timing the fan.

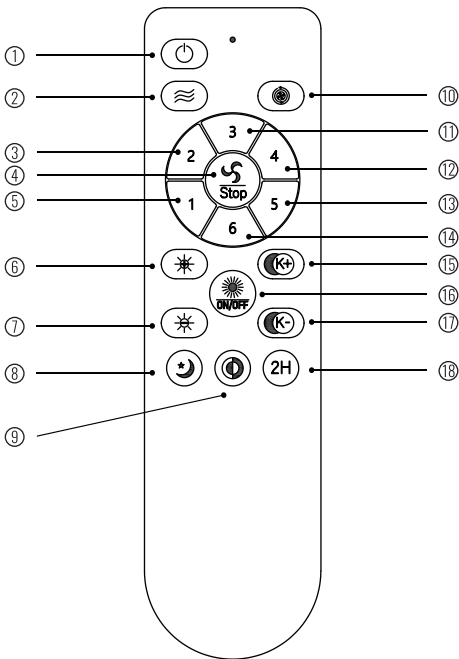

REMOTE SIGNAL PAIRING:

If the remote control loses signal of the fan, press and hold the button ⑱ at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done.

APP CONTROL INSTRUCTIONS

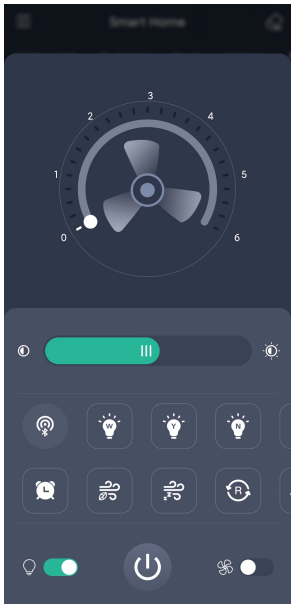

Install the "FanLamp Pro" app from Google Play, Apple App Store, or other app stores by scanning the QR code or searching for the app name.
Ensure that your phone is connected to the internet and Bluetooth enabled.

	Pairing: Click the Pair button within 5 seconds after turning on the fan from the wall switch. Once the fan flashes or beeps, it has been successfully paired with your phone and can now be controlled through the app.
	Slide the slider to change the fan speed
	Slide to adjust the brightness of the light
	Quickly change color temperature " White, Yellow, Natural "
	Switch to night light mode
	Fan forward & Fan reverse
	Guiding style (not supported by this product)
	Timer
	Natural wind: Simulate natural wind and automatically adjust the wind speed
	Sleeping wind (Not applicable on this fan)
	Turn on/off the light
	Turn on/off the fan

NOTE:

Install the "FanLamp Pro" app from Google Play, Apple App Store, or other app stores by scanning the QR code or searching for the app name.
Ensure that your phone is connected to the internet and Bluetooth enabled.