

### SPLIT CAPACITOR MOTOR

Lower amp draw for higher efficiency and longer-life.

### COPPER MOTOR WINDINGS

Maximum efficiency & longevity.

### STAINLESS STEEL HOUSING

Ultimate corrosion-resistance.

### MECHANICAL SHAFT SEAL

Protects motor by keeping water out and oil in.

### SOLID CAST IRON BASE

Durable & long-lasting.

### CAST IRON IMPELLER

For maximum performance & durability.

### CAST ALUMINUM CONSTRUCTION

Durable & long-lasting.

### SPLIT CAPACITOR MOTOR

Lower amp draw for higher efficiency and longer-life.

### COPPER MOTOR WINDINGS

Maximum efficiency & longevity.

### DUAL O-RING SEALS

Protects motor by keeping water out and oil in.

### VORTEX IMPELLER

Prevents clogging while allowing for maximum water flow.

## VERTICAL SUMP PUMPS

Feature	DXWP62383 DXWP62389 - KIT	DXWP62583	DXWP62783	DXWP62183
HP	1/3	1/2	3/4	1
Voltage	115	115	115	115
Running Amps	6.5	10	10.7	12
Switch Type	Vertical	Vertical	Vertical	Vertical
Cord Length	10 ft.	10 ft.	10 ft.	10 ft.
Material	Stainless Steel, Aluminum and Cast Iron	Stainless Steel, Aluminum and Cast Iron	Stainless Steel, Aluminum and Cast Iron	Stainless Steel, Aluminum and Cast Iron
Discharge Size	2 in. or 1-1/2 in. NPT	2 in. or 1-1/2 in. NPT	2 in. or 1-1/2 in. NPT	2 in. or 1-1/2 in. NPT
Solids Handling	Up To 1/2 in.	Up To 1/2 in.	Up To 1/2 in.	Up To 1/2 in.
GPM at 0 ft.	75	102	108	117

## TETHERED SUMP PUMPS

Feature	DXWP62381	DXWP62581	DXWP62781	DXWP62181
HP	1/3	1/2	3/4	1
Voltage	115	115	115	115
Running Amps	6.5	10	10.7	12
Switch Type	Tethered	Tethered	Tethered	Tethered
Cord Length	10 ft.	10 ft.	10 ft.	10 ft.
Material	Stainless Steel, Aluminum and Cast Iron	Stainless Steel, Aluminum and Cast Iron	Stainless Steel, Aluminum and Cast Iron	Stainless Steel, Aluminum and Cast Iron
Discharge Size	2 in. or 1-1/2 in. NPT	2 in. or 1-1/2 in. NPT	2 in. or 1-1/2 in. NPT	2 in. or 1-1/2 in. NPT
Solids Handling	Up To 1/2 in.	Up To 1/2 in.	Up To 1/2 in.	Up To 1/2 in.
GPM at 0 ft.	75	102	108	117

## UTILITY PUMPS

Feature	DXWP61374	DXWP61774	DXWP61379 - KIT	DXWP61779 - KIT
HP	1/3	3/4	1/3	3/4
Voltage	115	115	115	115
Running Amps	5.0	9.1	5.0	9.1
Cord Length	20 ft.	20 ft.	20 ft.	20 ft.
Material	Aluminum	Aluminum	Aluminum	Aluminum
Discharge Size	1-1/2 in. NPT or 3/4 in. GHT	1-1/2 in. NPT or 3/4 in. GHT	1-1/2 in. NPT or 3/4 in. GHT	1-1/2 in. NPT or 3/4 in. GHT
Solids Handling	Up To 3/8 in.	Up To 3/8 in.	Up To 3/8 in.	Up To 3/8 in.
GPM at 0 ft.	60	83	60	83
Hose Type*	N/A	N/A	Industrial Lay-Flat	Industrial Lay-Flat
Cam-lock Fittings*	N/A	N/A	Heavy Duty 1-1/2 in.	Heavy Duty 1-1/2 in.


## ACCESSORIES

Hose Kit - DXWP69646	
Hose Type	Reinforced PVC
Hose Length	25 ft.
Hose Size	1-1/2 in.
Cam-lock Fittings	1-1/2 in.
Garden Hose Adapter	1-1/2 in. MPT x 3/4 in. GHT
Hose Clamp	Stainless Steel
Max Liquid Temperature	120°F
Max Pressure	116 PSI
Warranty	1 Year

Check Valve - DXWPCV69512	
Material	ABS and Rubber
Size	1-1/4 in. or 1-1/2 in.
Hose Clamps	Stainless Steel
Warranty	1 Year

# DEWALT®

## SUMP & UTILITY PUMPS

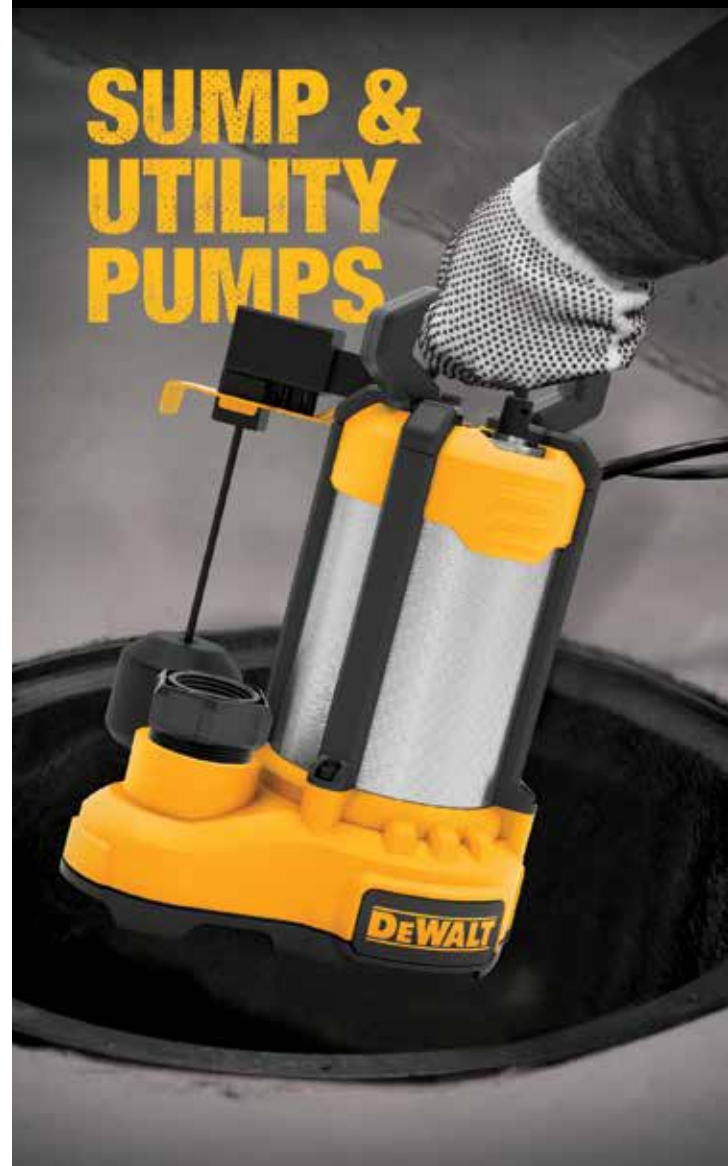

## GUARANTEED TOUGH.®

REV 031323  
602505



## 10-YEAR WARRANTY ON ALL DEWALT SUMP & UTILITY PUMPS

### STAINLESS STEEL / CAST IRON AUTOMATIC SUBMERSIBLE SUMP PUMPS

DEWALT® SUMP PUMPS ARE GUARANTEED TOUGH® TO MEET AND EXCEED THE EXPECTATIONS OF EXPERIENCED TRADE PROFESSIONALS AND HOMEOWNERS ALIKE.

- Available in 1/3, 1/2, 3/4 & 1 horsepower.
- Heavy-duty stainless steel and epoxy coated cast iron components for durability and longevity.
- Vertical float switch tested to over 3 million cycles features a piggy-back plug to bypass automatic operation for optional manual operation.
- Heavy duty cast iron impeller handles solids up to 1/2-inch diameter while pumping up to 117 gallons per minute and up to 37 feet vertically.
- Sump pump kits include a high quality DEWALT check valve\*.



### ALUMINUM SUBMERSIBLE UTILITY PUMPS

DEWALT® UTILITY PUMPS ARE GUARANTEED TOUGH® TO MEET THE RIGOROUS DEMANDS OF TRADE PROFESSIONALS AS WELL AS HOMEOWNERS.

- Available in 1/3 & 3/4 horsepower.
- Heavy-duty cast aluminum construction - Fully submersible, lightweight yet durable.
- Easy carry handle and durable 20-foot power cord for greater versatility.
- 1-1/2 in. discharge and 3/4 in. garden hose adapter included.
- High performance pumping up to 83 gallons per minute and up to 41 feet vertically.
- Utility pump kits include a DEWALT 25 ft. industrial lay-flat hose kit\*.

DEWALT®, GUARANTEED TOUGH® and the yellow/black color scheme are trademarks for DEWALT power tools, outdoor equipment, accessories, anchors and concrete adhesives and are used under license. Product may differ from that pictured. Does not affect function.

Manufactured under license by: PEDROLLO GROUP INC.  
45 MARYLAND AVE EAST | ST. PAUL, MN 55117

1-855-222-3841 • customer.service@pedrollo-usa.com

