


UPRIGHT™

LP8577**
48" Ceiling Fan

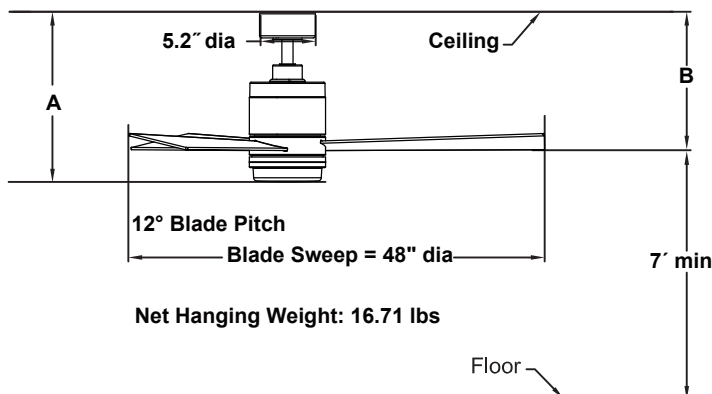

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 15 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 22" plywood blades is included.

CONTROL OPTIONS:

TR500US hand-held remote control is included. Push button remote control with variable fan speeds, uplight, downlight, infinite light levels, fan/light timer and off button. Optional WC3WH and WR502WH wall controls, BTR9U remote control with receiver and BTR9U receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One uplight 13-watt LED and downlight 18-watt LED included.

DOWNROD OPTIONS:

Fan comes with a 1" Dia. x 4.5" downrod (DRT1-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72". For installations requiring a longer downrod, a downrod coupler is available. Fan must use 12" or longer downrod, and can be mounted on a sloped ceiling up to 19°. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry location only.

	A	B
Fan w/4.5" downrod	15.78"	12.84"
Fan w/12" downrod	23.28"	20.34"
Fan w/18" downrod	29.28"	26.34"
Fan w/24" downrod	35.28"	32.34"
Fan w/36" downrod	47.28"	44.34"
Fan w/48" downrod	59.28"	56.34"
Fan w/60" downrod	71.28"	68.34"
Fan w/72" downrod	83.28"	80.34"

Available Finishes

LBL	Black with Black/Silver Reversible Blade and Opal Frosted Glass
LBN	Brushed Nickel with Black/Gray Reversible Blade and Opal Frosted Glass
LMW	Matte White with Matte White Blade and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	4720	94	0.42	50
Med	145	3450	116	0.33	30
Low	90	2016	147	0.22	14

Energy Guide FTC

Power (Wave)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
34	2995	10	88

Uplight Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	13	1	1400	3000	90%

Downlight Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%