



Stratus Series

V8PN217/220/230/232/240

Features

Contemporary narrow white cloud 2 light vanity has rounded corners and can be mounted vertically or horizontally. Diffuser fully encloses the fixture providing a clean appearance. Power supply connections can be made in a 2" x 4" handy-box (not included) or made inside the housing.

Construction

The wiring channel is formed from 22-gauge steel and is provided with standard mounting holes and wiring access.

Finish

Housing is finished in lighting grade baked gloss white enamel paint.

Diffuser

Diffuser is vacuum-formed .125" thick crepe matte texture. Diffuser is secured with a screw on each end.

Electrical

This unit can be ordered in the following options: with UL listed instant-start, electronic high power factor ballast; 120V 60Hz AC (E8 suffix), 120-277 Universal 50/60Hz AC (MV suffix). R8 model number suffix designates normal power factor, 120V, residential grade ballast.

Lamping

For use with 2 T8 linear fluorescent lamps supplied by others.

Certification

All fixtures are cULus listed for damp locations.


Options (consult factory)

Emergency battery backup
ENERGY STAR qualified with 120V ballast

For photometric information, consult factory.

Specifications and dimensions
subject to change without notice.

Project		Fixture Type
Location		Quantity
Approved By	Date	Catalog Number

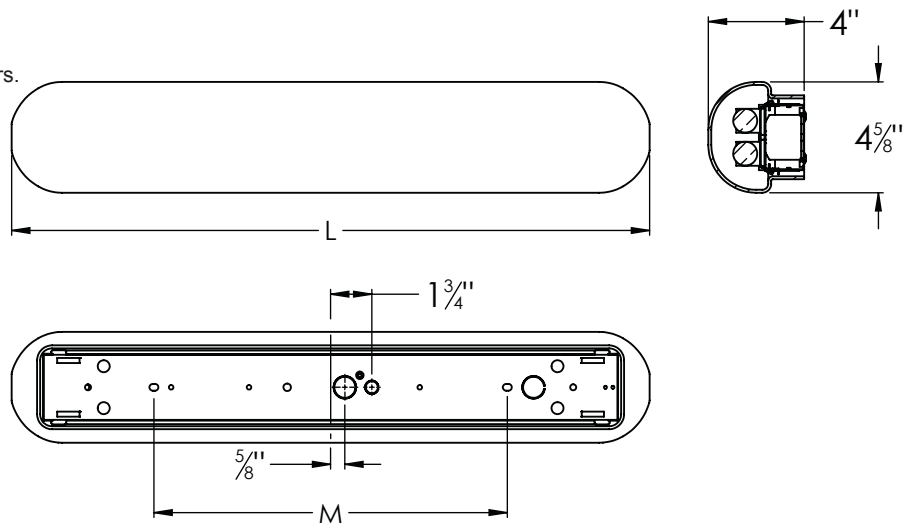

Ordering Information:

Model No.				Lamps		Dimensions			Mounting
Finish	120V	120V	120-277V	Qty	Lamp	H	L	D	M
White Diffuser	V8PN217R8	V8PN220E8	V8PN217MV	2	F17T8	4-5/8"	26-3/4"	4"	14-3/4"
White Diffuser	V8PN225R8	V8PN230E8	V8PN225MV	2	F25T8	4-5/8"	38-3/4"	4"	26-3/4"
White Diffuser	V8PN232R8	V8PN240E8	V8PN232MV	2	F32T8	4-5/8"	50-3/4"	4"	38-3/4"