### **ASSEMBLY INSTRUCTIONS**




- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.




🕍 If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

# **TOOLS REQUIRED**




### HARDWARE INCLUDED

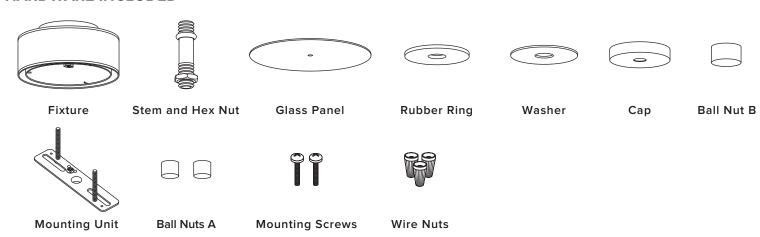

### \* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


### **EXPLODED PARTS**

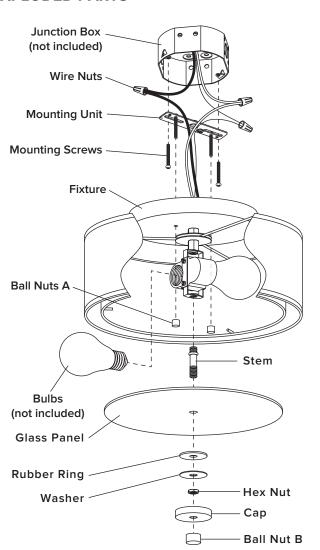

### **INSTALLATION**


### STEP 1


Unscrew the **ball nuts A** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).

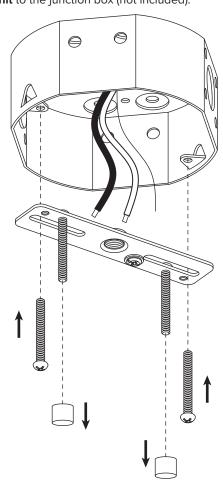

### STEP 2


Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied wire nuts. Secure with electrical tape.

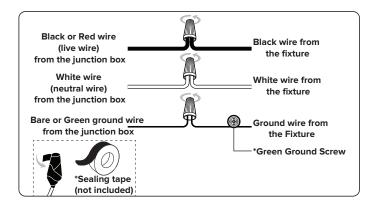




#### STEP 3


Attach the **fixture** to the **mounting unit** through screws holes as shown, and secure it with ball nuts A.



# STEP 4 Screw the **stem and hex nut** into the **fixture**.



## STEP 5

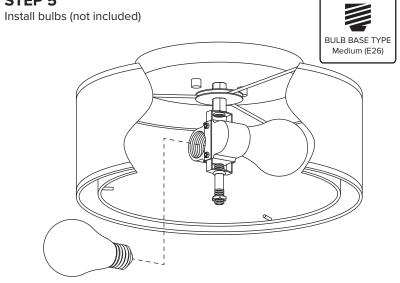

#### STEP 6

- 1. Remove the **hex nut** from the **stem**.
- 2. Place the glass panel, rubber ring, and washer onto the threaded pipe, then secure with hex nut.
- 3. Place the cap onto the threaded pipe, tighten with ball nut B.

