
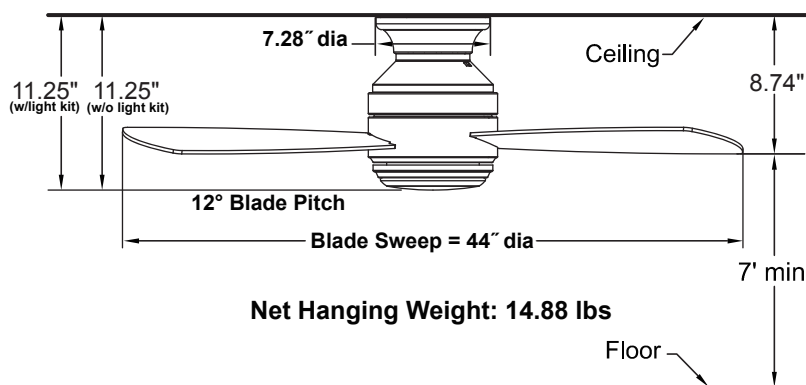


LEVEL™

LP8347** 44" Ceiling Fan

Ceiling Bracket
Width of the screw slot



Available Finishes

| | |
|----|--|
| AZ | Aged Bronze with Aged Bronze blades and Opal Frosted Glass / Steel Cap |
| BN | Brushed Nickel with Brushed Nickel blades and Opal Frosted Glass / Steel Cap |
| GR | Matte Greige with Matte Greige blades and Opal Frosted Glass / Steel Cap |
| MW | Matte White with Matte White blades and Opal Frosted Glass / Steel Cap |

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 250 | 4536 | 88 | 0.43 | 51 |
| Med | 183 | 3358 | 123 | 0.32 | 27 |
| Low | 117 | 2343 | 179 | 0.22 | 13 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED | 17.5 | 1 | 1700 | 3000 | 80% |

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 12 AC motor is designed for optimal performance with this fan.

BLADES:

A set of three 19" plywood blades is included.

CONTROL OPTIONS:

CW60WH-8347 wall control is included. This wall control has 3 fan speeds switch and light dimming switch. The reverse switch is located on the top housing. Optional CW1SW and CW2 wall controls available—sold separately. Optional C4 remote control with receiver unit is available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 17.5-watt LED included.

LOCATION USE:

Fan is rated for dry location only.