



S6792TRM Tub/Shower Trim Specification Submittal

Location:

Model Numbers	Options/Modifications
<div><input type="checkbox"/> S6792TRM Tub/Shower Trim with integral volume control</div> <div>Valve Options: -S262 Series Temptrol Shower Valve with TRM modifier. -S162 Series Temptrol Shower Valve requires TC modifier.</div>	<div><input type="checkbox"/> 15 1.5 gpm (5.7 L/min) flow restrictor</div> <div><input type="checkbox"/> L1 Less showerhead</div> <div><input type="checkbox"/> L4 Less head, arm and flange</div> <div><input type="checkbox"/> L7 Less handle</div> <div><input type="checkbox"/> TC Test Cap Trim (includes TA-10&T-12A) <i>used with S162 series Temptrol Shower Valve</i></div> <div><input type="checkbox"/> STN Satin Nickel finish</div> <div><input type="checkbox"/> MB Matte Black finish</div> <div><input type="checkbox"/> BBZ Brushed Bronze finish</div>
Feature Highlights	Warranty
<ul style="list-style-type: none">Identity Tub/Shower Trim.Requires Temptrol® Pressure Balancing Tub/Shower Valve.Integral diverter control.Metal lever handle.5-1/4" tub spout.Single mode showerhead.2.0 gpm (7.6 L/min) flow restrictor.Components shall be metal and nonmetal construction, plated in standard polished chrome finish.	<div>Limited Lifetime - to the original end purchaser in consumer/residential installations.</div> <div>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</div> <div></div>
Compliance	
<ul style="list-style-type: none">ASME A112.18.1/CSA B125.1WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)Lever handle meets ADA requirements for operation. <div></div>	

SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S6792	STN		15	TRM		S6792STN15TRM
S6792	MB	L2		TRM	TC	S6792MBL2TRMTC

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/ Engineering Specification

Symmons Identity Tub and Shower Trim _____ Includes Identity Tub and Shower Trim powered by Temptrol® Pressure Balancing Shower Valve. Features integral diverter control, metal level handle, 5-1/4" tub spout, single mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm and 2.0 gpm complaint. Lever handle meets ADA requirements for operation. Available options include: "15 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L7 - Less handle", "TC - Test Cap Trim", "STN - Satin Nickel finish", "MB - Matte Black finish", and "BBZ - Brushed Bronze finish".

Dimensions

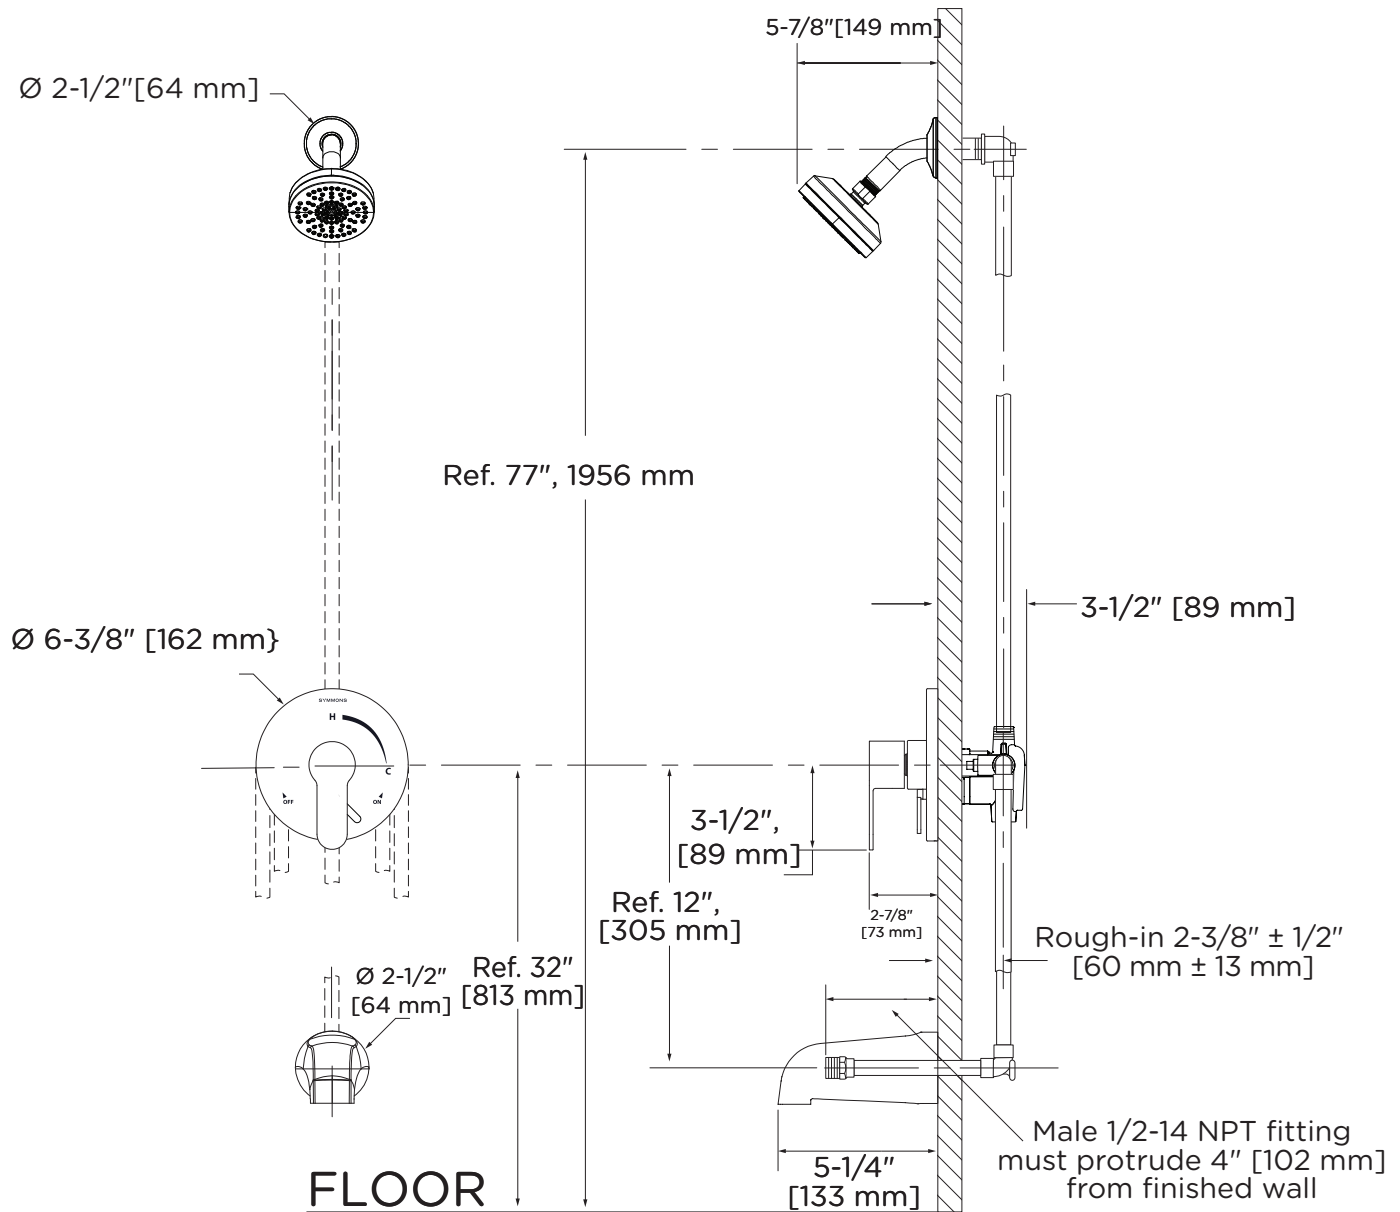

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.