
User's Manual



INSTALLATION INSTRUCTIONS

Installation Manual

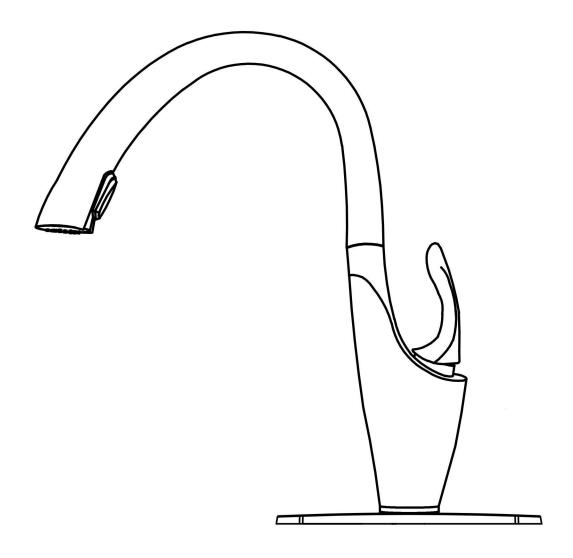

IAPMO RESEARCH AND TESTING, INC.













IAPMO RESEARCH AND TESTING, INC.













IAPMO RESEARCH AND TESTING, INC.













BEFORE INSTALLATION


This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.




Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.



- A. Make sure you have all necessary parts by checking the diagram and parts list.
- B. Turn off the hot and cold water supply at the angle stops and turm on the old faucet to release any built up pressure. Remove existing faucet. Clean sink or countertopin preparation for new faucet.
- C. Shut off angle stops.
- D. Pre-drilled hole size requirement: 1-3/8"(min)-1-1/2"(max) Max countertop thickness without deck plate: 1-1/2"(1 hole install) Max countertop thickness with deck plate: 1"(1, 2 or 3 hole install)

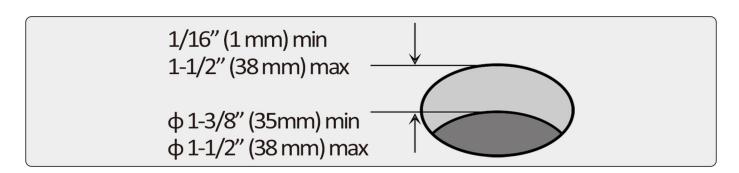

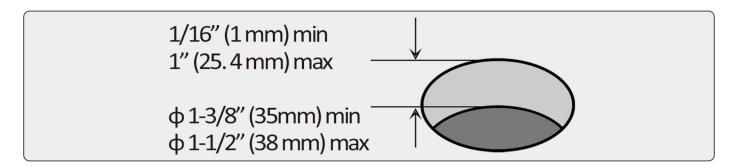

Tools you will need:



Adjustable Wrench



Safety Goggles



Bucket



Silicone Sealant


INSTALLATION STEPS

1. Without Deck Plate


Slide the washer(o-ring) to faucet base. Insert the faucet through sink hole.

With Deck Plate


Slide the washer(o-ring), deck & putty plate to faucet base. Insert the faucet through sink hole.




3. Correct and tighten hot and cold water hose. Note: A small rubber o-ring is put into each connector of the hot & cold waterlines, please check before tighten hot and cold water hose.




5. Open the weight, put it on sprayer hose. Then close it. Note: To make sure that the pull out hose go back smothly, you need to adjust the weight in right position.



6. Place handle in off position. Screw off the sprayer head. Note: Don't lost the o-ring




2. Put the washer on screw nut. Screw the nut onto thread. Brefore tighten, rotate the hand to the side you like, then tighten the nut securely.




4. Push the sprayer hose to the quick connect.

Note: please do not use the tape for the quick connect.




7. Turn on water supply. Check for leaks and flush hoses and flush the faucet for 30s.




INSTALLATION STEPS

8. Turn off the faucet, screw the sprayer head back the sprayer hose. Note: Don't forget the o-ring filter.



INSTALLATION DIMENSION

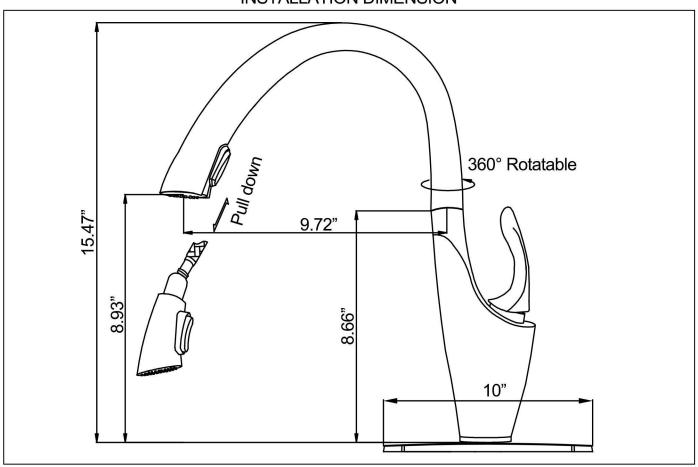

CLEANING CARE

In order to keep the appearance of faucet clean, bright and good performance, please take care of the faucet as follows;



- 1. Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner, or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.

