


Item Number: 5106291

WARNING (To reduce the risk of fire, electric shock, or personal injury):

1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at a later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done.
 - » Go to the main fuse, or circuit breaker, box in your home.
Place the main power switch in the **"OFF"** position.
 - » Place the wall switch in the **"OFF"** position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before installation.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **Type B, Max 40W** per bulb.
7. Keep the lamp away from acidic and alkaline substances in case of damaging the surface of the lamp.
8. When replacing bulbs, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

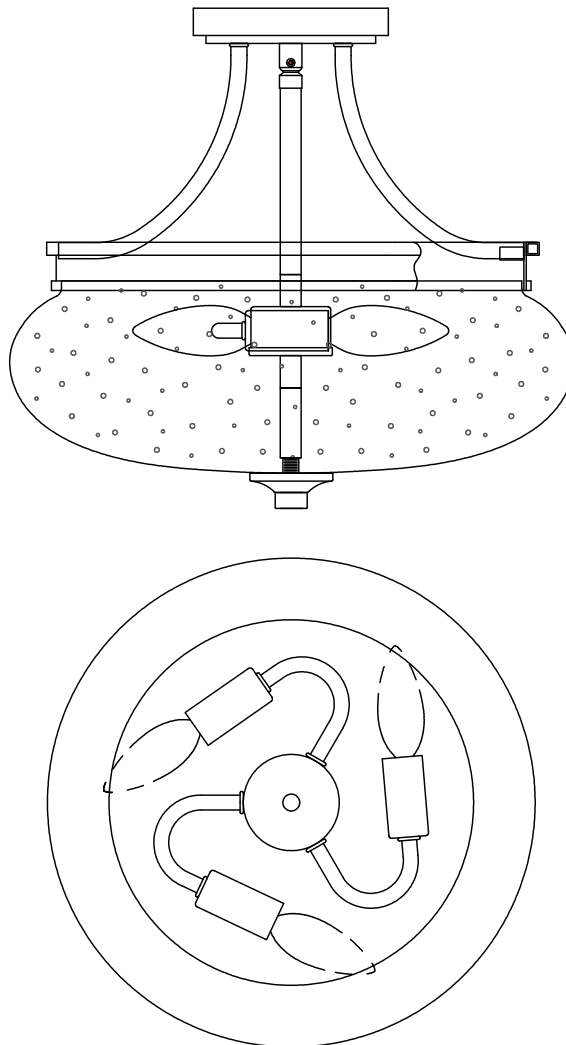

ORDERING PARTS





Keep this sheet for future reference in case you need to order replacement parts. All parts for this fixture can be ordered from the place of purchase. Be sure to use exact wording from illustration when ordering parts.

CLEANING

To clean, wipe the fixture with a soft cloth. Clean glass with a mild cleaner (such as mild and non-abrasive soap). Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

TOOLS REQUIRED (NOT INCLUDED):

Before starting assembly and installation please prepare the needed tools as below picture

				
Ladder	Philips Head or Flat Blade Screwdriver	Electrical Tape	Pliers	Wire Cutter/Stripper

PARTS TYPE & QTY INCLUDING:

- (C) Mounting plate (1)
- (D) Green ground screw (1)
- (E) Hex nut (4)
- (F) Serrated washer (4)
- (G) Canopy (1)
- (H) Knob nut (2)
- (I) Arm (3)
- (J) Stem (1)
- (K) Screw (2)
- (L) Sockets assembly (1)
- (M) Ring (1)
- (N) Tube (1)
- (O) Glass shade (1)
- (P) Plastic washer (1)
- (Q) Iron washer (1)
- (R) Smaller hex nut (2)
- (S) Flat over (1)
- (T) Flat nut (1)
- (U) Flat washer (4)

ACCESSORIES & QTY ENCLOSED:



- (A) Plastic wire connector (3)
- (B) Mounting screw (2)
- (K) Screw (1) (Spare parts)

ASSEMBLY & INSTALLATION INSTRUCTIONS:


1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

- 2 » • Unscrew knob nuts (H) from mounting plate (C).
• Set them aside for later installation.


OUTLET BOX

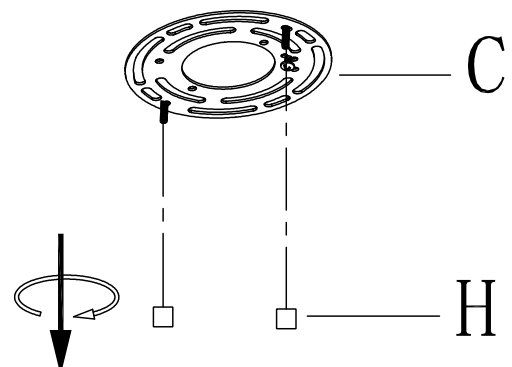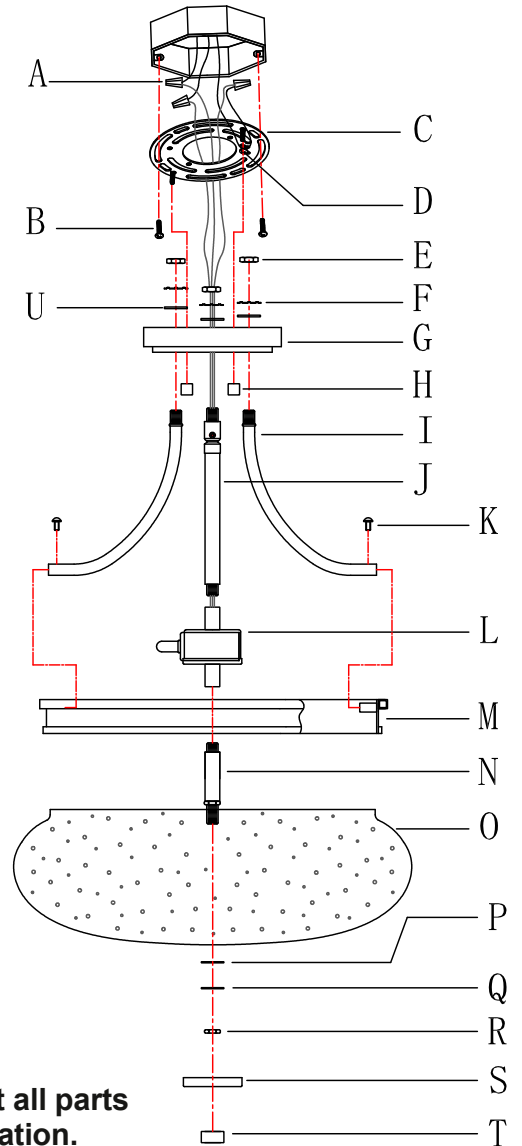

- 3 »
- Pass the fixture wires through stem (J).
 - Screw stem (J) onto the top of sockets assembly (L).
 - Screw tube (N) onto the bottom of sockets assembly (L).
 - Pass the fixture wires through canopy (G), flat washer (U), serrated washer (F) and hex nut (E).
 - Tighten hex nut (E) onto the top of stem (J) to secure canopy (G).

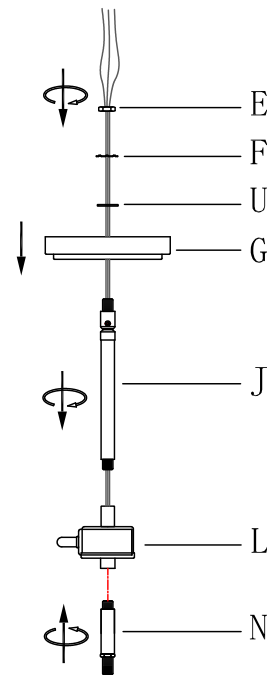

- 4 »
- 1) Insert arms (I) into ring (M) as shown in the illustration.
 - 2) Secure arms (I) and ring (M) with screws (K).
 - 3) Carefully let arms (I) pass through canopy (G), flat washers (U), serrated washers (F) and hex nuts (E).
 - 4) Tighten hex nuts (E) onto arms (I) to secure them.

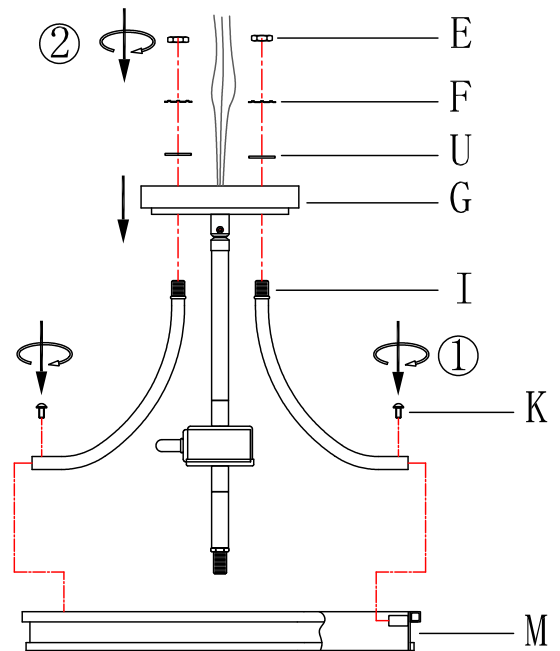


5. Turn off power

Before you start the installation, NEVER attempt any work without shutting off the electricity until the work is done.

- » Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position.
- » Place the wall switch in the "OFF" position.

- 6 »
- Carefully pass the supply wires through mounting plate (C).
 - Secure mounting plate (C) to the outlet box with mounting screws (B).


NOTE: the side of mounting plate (C) marked "GND" must face out.

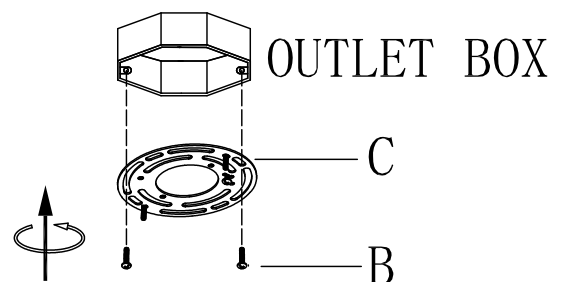

7 » Make wire connections

Connect wires as below wires connection shown. **PLEASE NOTE THAT GROUND WIRE IS BARE COPPER WIRE, NEVER CONNECT OTHER WIRES TO GROUND WIRES.**

Connect ground wires according to the below chart

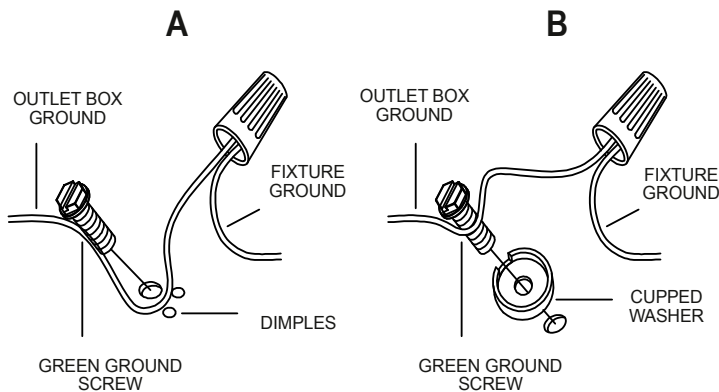

Connect wires according to the below chart

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

* Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire


- **Twist wires together with plastic wire connectors until tightly joined.**
- **Wrap each connector with approved electrical tape.**
- **Be sure that no wire strands are exposed and then carefully tuck all wires into the outlet box.**

- 8 »
- Raise canopy (G) over the outlet box.
 - Align canopy (G) with the pre-assembled mounting screws.
 - Secure canopy (G) with the previously removed knob nuts (H) till snug.

Note: canopy (G) should be snug against the ceiling and knob nuts (H).

If not, adjust the threaded length on mounting plate assembly (C):

- **Unscrew the pre-assembled hex nuts.**
- **Screw the pre-assembled screws in or out of mounting plate (C).**
- **When the secure length is achieved, tighten the hex nuts and back to step 8.**

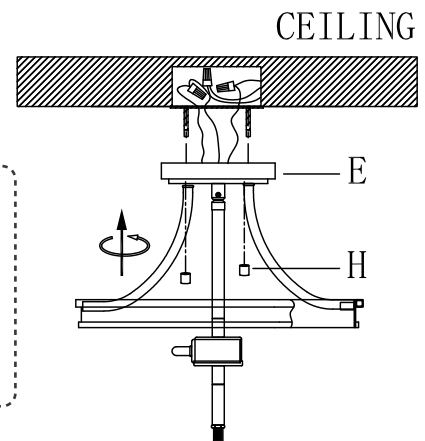


- 9 »
- 1) Install bulbs (not included) (Please do not exceed the maximum wattage recommended on the socket.)
 - 2) Carefully let tube (N) pass through glass shade (O), plastic washer (P), iron washer (Q).
 - 3) Tighten smaller hex nut (R) onto tube (N) to secure glass shade (O).
 - 4) Carefully let tube (N) pass through flat cover (S).
 - 5) Tighten flat nut (T) onto tube (N) to secure flat cover (S).

Note: glass shade (O) should be snug against ring (M) and flat cover (S).

If not, adjust the threaded length in tube (N):

- **Remove glass shade (O), plastic washer (P), iron washer (Q) and smaller hex nut (R).**
- **Screw the threaded pipe in or out of tube (N), then tighten another smaller hex nut (R) as shown in the illustration.**
- **When the secure length is achieved, return to step 2).**

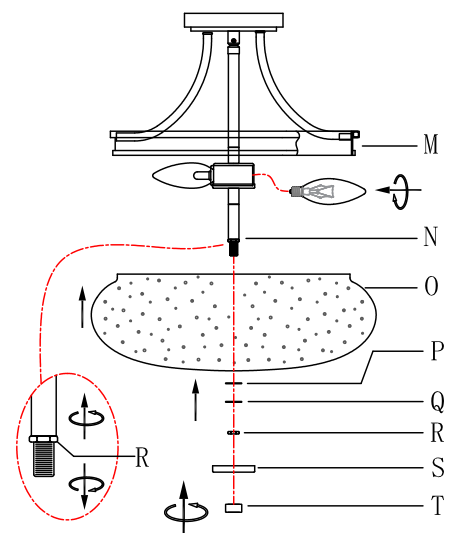

10. Check everything is already installed properly, then you could turn on the light. Enjoy!