


CHANDELIER



INSTALLATION MANUAL

TOOLS REQUIRED

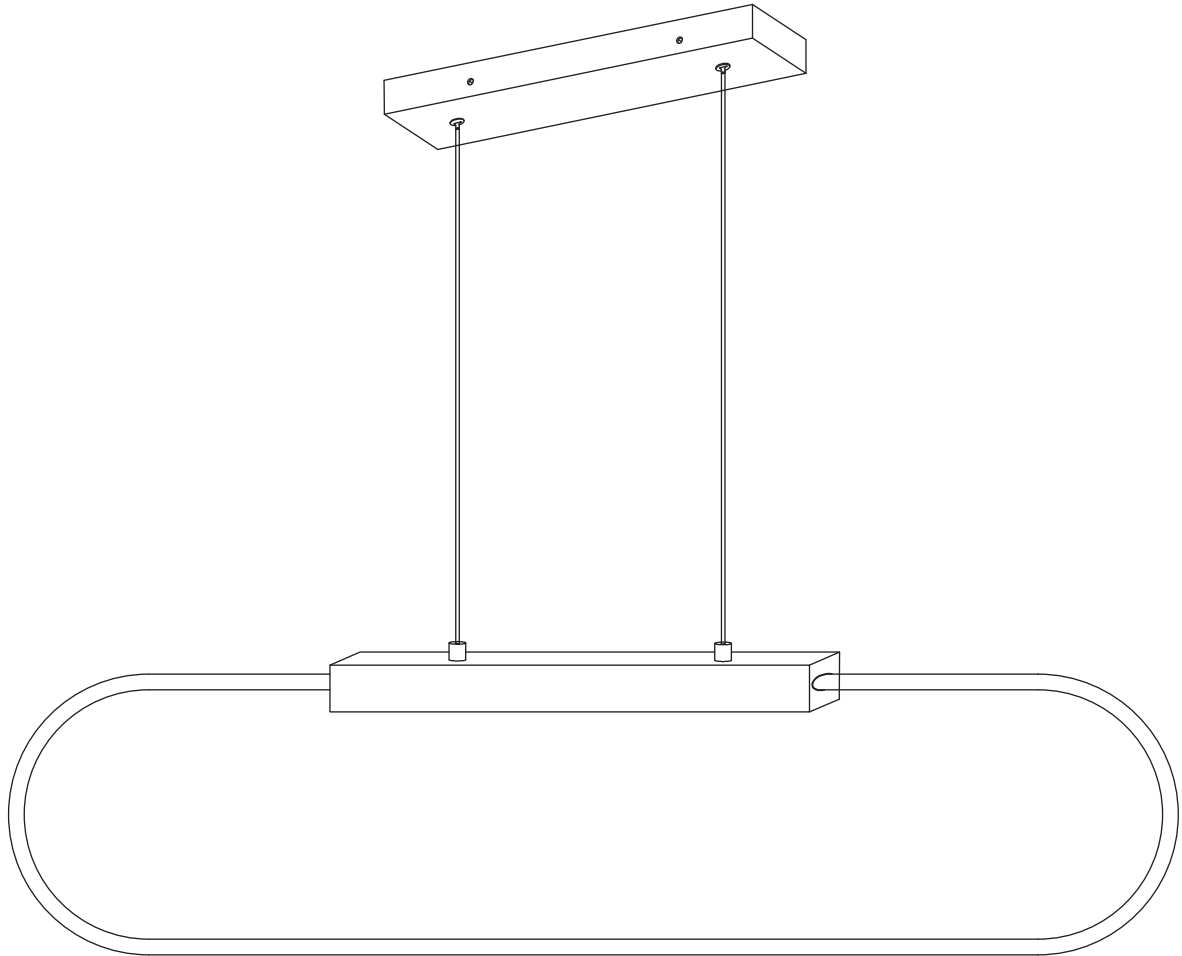


Ladder



Pliers




Wire Strippers



Screwdrivers

01

PACKING LIST

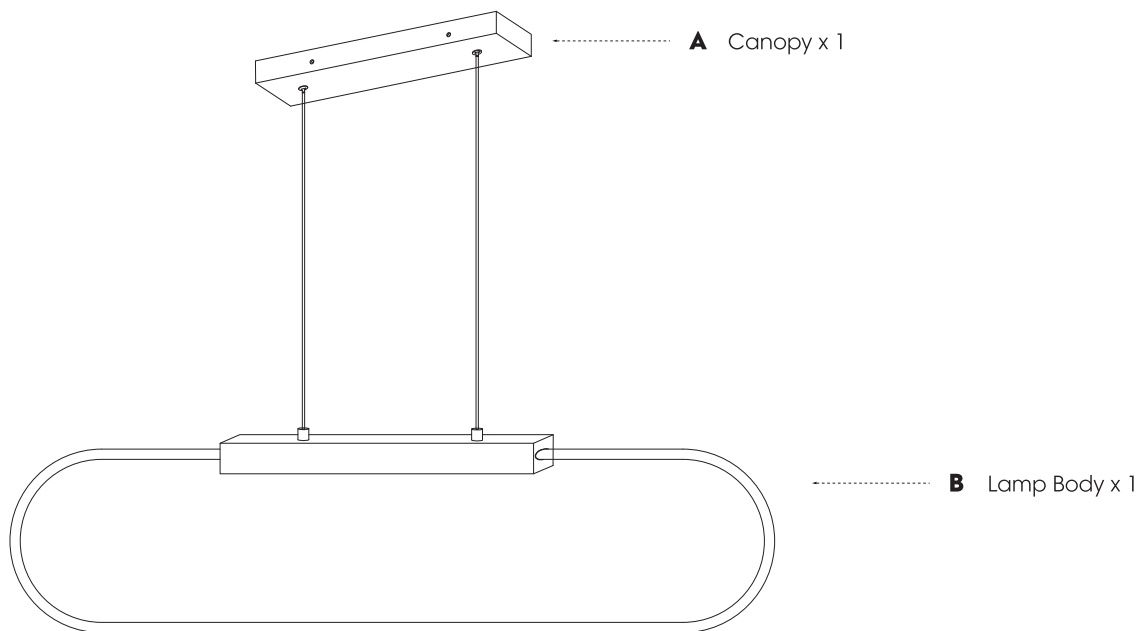


02

INSTALLATION KIT

AA

1×



Mounting Bracket

BB

1×



Ground Screw

CC

3×



Wire Nut

DD

4×



Canopy Screw

EE

2×



Outlet Box Screw

FF

1×





Gloves

NOTE:

1. AA/BB/DD has already been pre-installed with AA, and AA has already been pre-installed with Canopy (A).

1. Install the Mounting Bracket

Loosen the Canopy Screw (DD) and take out the Mounting Bracket (AA) from the Canopy (A), then secure the Mounting Bracket (AA) onto the box with screws taken off or Outlet Box Screw (EE).

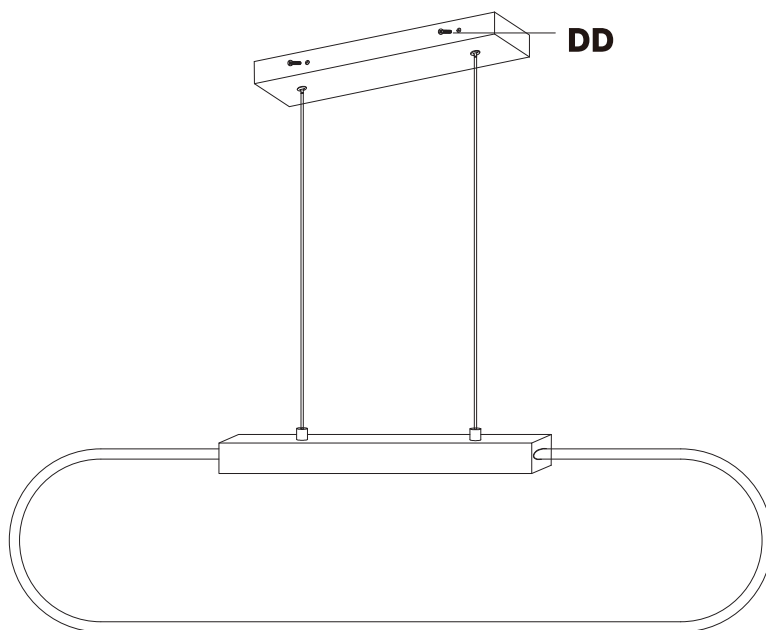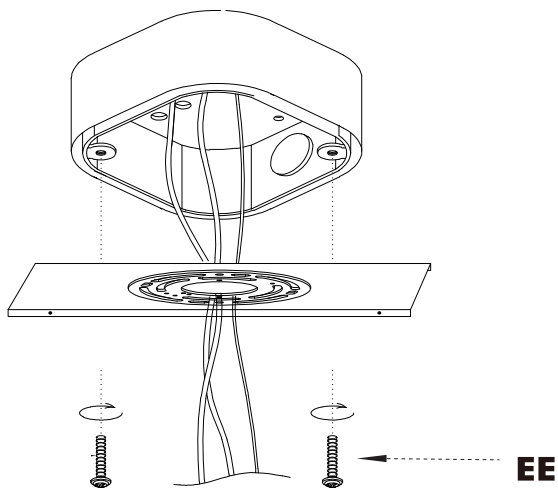


2. Connect the Wires

Step 1. Wrap the ground wire from the outlet box around the Ground Screw (BB) on the Mounting Bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.

Step 2. Connect the wires from the fixture to the house supply wires, neutral (white) to neutral wire, and hot (black) to hot wire.

Step 3. Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.

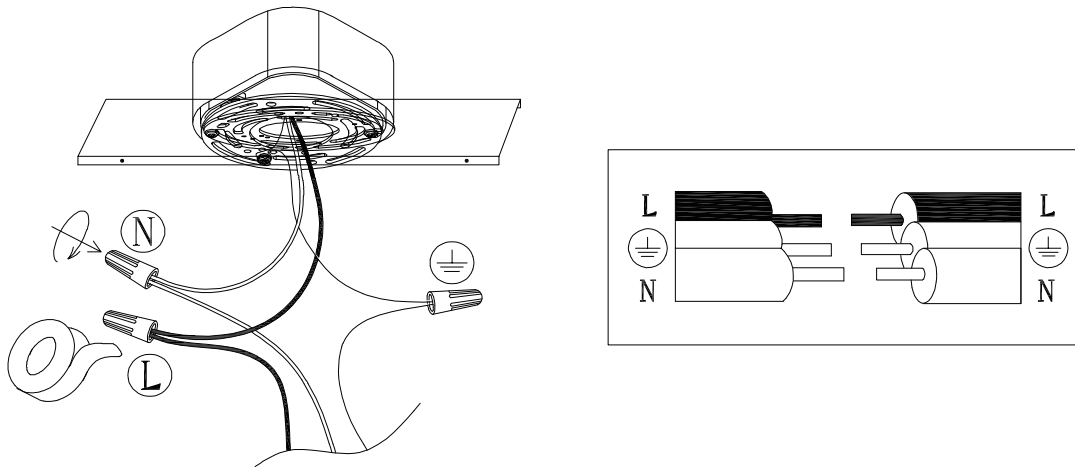

3. Install the Canopy

Fix the Canopy (A) onto the Mounting Bracket (AA) with the Canopy Screw (DD).

NOTE:

This light uses an ON/OFF switch.

Compatible dimming switches (not included).

Press the Wire Locker to adjust the desired length of Hanging Wire.

