
## 8090ML-04-US

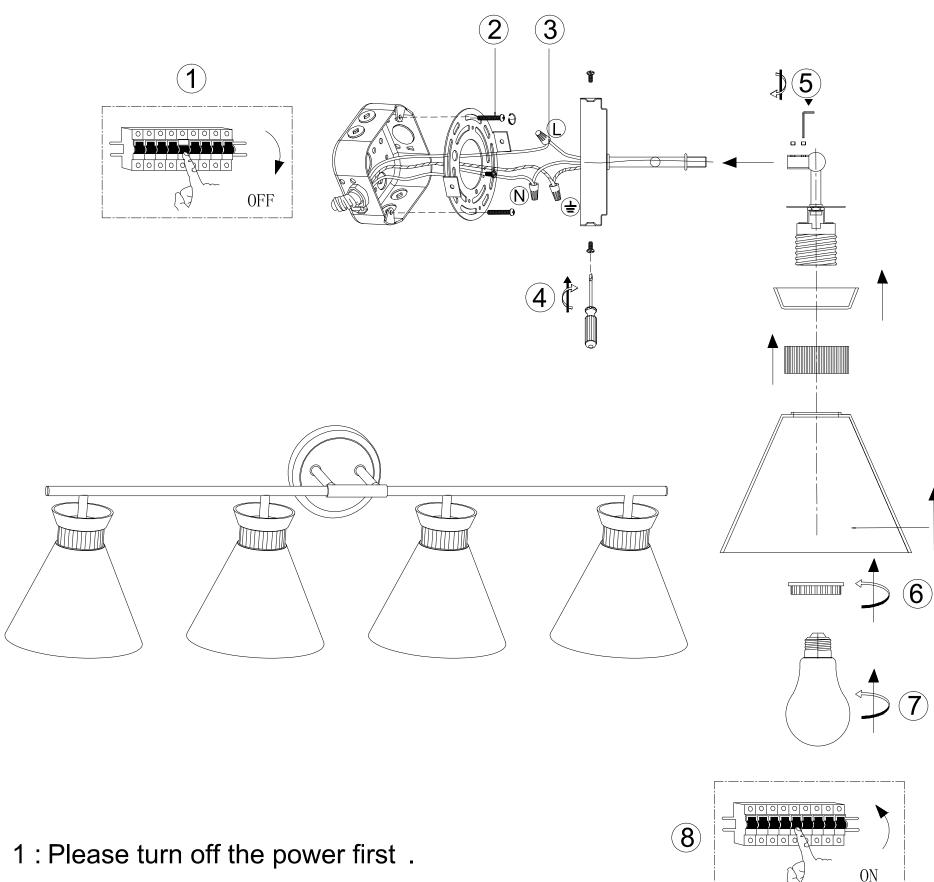

- 2 : Screw the hanging board to the junction box.
- 3 : Connect all the wiring L/N/G as diagram shows using plastic connector supplied.
- 4 : Stick the ceiling on the mounting bracket Use the mounting screws provided with the fittings to tighten
- 5 :Insert the lamp body iron into the head tube, and lock the head tube with the hex socket screw with a wrench
- 6: Fix the glass lamp shade on the lamp holder as shown in the picture, and fix it with a fixing cup
- 7: Install the light bulb (E26 socket).
- 8: Please turn on the power