

HISENSE REFRIGERATOR



HRM260N6TSE

Pureflat Series  
Standard Depth French Door Refrigerator

- VersaTemp Zone (27°F~41°F)
- Filtered Ice & Water Dispenser
- Smart Connectivity
- Premium Flat Door Design
- 360° Surround LED Lighting
- Flexible Sliding Shelf

AVAILABLE COLORS



Fingerprint-Resistant Stainless Steel




PERFORMANCE	
Refrigerator (cu. ft.)	15.57
VersaTemp Zone (cu. ft.)	3.1
Freezer (cu. ft.)	6.97
Total Capacity (cu. ft.)	25.6
ENERGY STAR® Certified	Yes
Energy Consumption (kWh/Year)	692
Safety Listing	UL Safety Listing
ICE & WATER SYSTEM	
Ice and Water Dispenser Type	Both
Ice / Water Location	External Dispenser
Dispenser Light	Yes
Ice Maker	Single in Refrigerator
Ice Type	Cubed/ Crushed
Space-Saving In-Door Ice	No
Daily Ice Production	6.4 lbs
Ice Storage Capacity	2.4 lbs
Removable Ice Bin	Yes
Water Filtration	Yes
Filter Model	HX2019F-A
Water Inlet Pressure	207~700kPa
COOLING SYSTEM	
Temperature Sensors	3
Compressor Type	Durable Inverter
Refrigerant (Type and Volume)	R600a/2.29oz(65g)
Multi Air Flow Cooling	Yes
Evaporator	2
CONVENIENCE	
Display Type	External/ Membrane / Blue LED
Temperature Controls	Electronic/ Digital
Door Alarm	Yes
Child Safety Lock	Yes
Auto Closing Door Hinge	Yes
Leveling Legs	Yes
Wi-Fi Connectivity	Yes(ConnectLife App)
Demo Mode	Yes
Gallon Door Storage	Yes
Noise Level (dB)	43

REFRIGERATOR	
Temperature Range (°F)	36°F~46°F
Door Type	Side Swing
No. of Shelves	4 Split (4 Fixed)
Cantilevered Shelves	Yes
Sliding Shelf	Yes
Shelf Construction	Tempered Glass
Shelf Trim	White Décor
No. of Crisper Drawers	2
No. of Caddy Box	1
LED Lighting	Yes (Ceiling & Side)
No. of Door Bins	6
Door Bin Construction	1 Piece (Clear)
VersaTemp Zone	
Temperature Range (°F)	24°F~41°F
Door Type	Pull-Out Drawer
Drawer Divider	Removable Caddy Box
LED Lighting	Yes (Ceiling LED)
FREEZER	
Temperature Range (°F)	-11°F~7°F
Door Type	Pull-Out Drawer
Drawers	2-Tier Organization
Drawer Divider	Yes
LED Lighting	Yes (Ceiling LED)
MATERIALS AND FINISHES	
Fingerprint-Resistant Door	Yes
Door Style	Flat
Door Texture	Smooth
Available Door Colors	Stainless Steel
Handle Type	Integrated
Hidden Hinges	Yes
Toe Grille	No
Cabinet Color	Grey
Inner Liner Color	White


INSTALLATION DIMENSION	
Product (W x H x D)	36.0*70.3*33.7"
Width (Excluding Door)	35.8"
Width (Including Door)	36.0"
Common Width	36.0"
Width (Door Open 90° Excluding Handle)	39.4"
Width (Door Open 90° Including Handle)	39.4"
Width (Door Fully Open Excluding Handle)	61.4"
Depth (Excluding Handles)	33.7"
Depth (Including Handles)	33.7"
Depth (Less Door)	28.7"
Depth (to Hinge Cover)	23.6"
Depth (Door Open 90°)	48.0"
Depth Type	Standard Depth
Height (to Top of Hinge)	70.3"
Height (to Top of Door)	70.3"
Height (to Top of Case)	69.0"
Installation Clearance	Sides 1/2", Top 1/2", Back 2"
Carton (W x H x D)	38.1*74.5*35.7"
Weight (Unit/ Carton)	320lbs./ 342lbs.
UNLIMITED WARRANTY	
Warranty	2-Year limited
Parts & Labor	2 Years
Sealed System (Parts & Labor)	5 Years
Accessories	90 Days for Parts
UPC CODES	
HRM260N6TSE (Fingerprint-Resistant Stainless Steel)	810088364006

HISENSE REFRIGERATOR

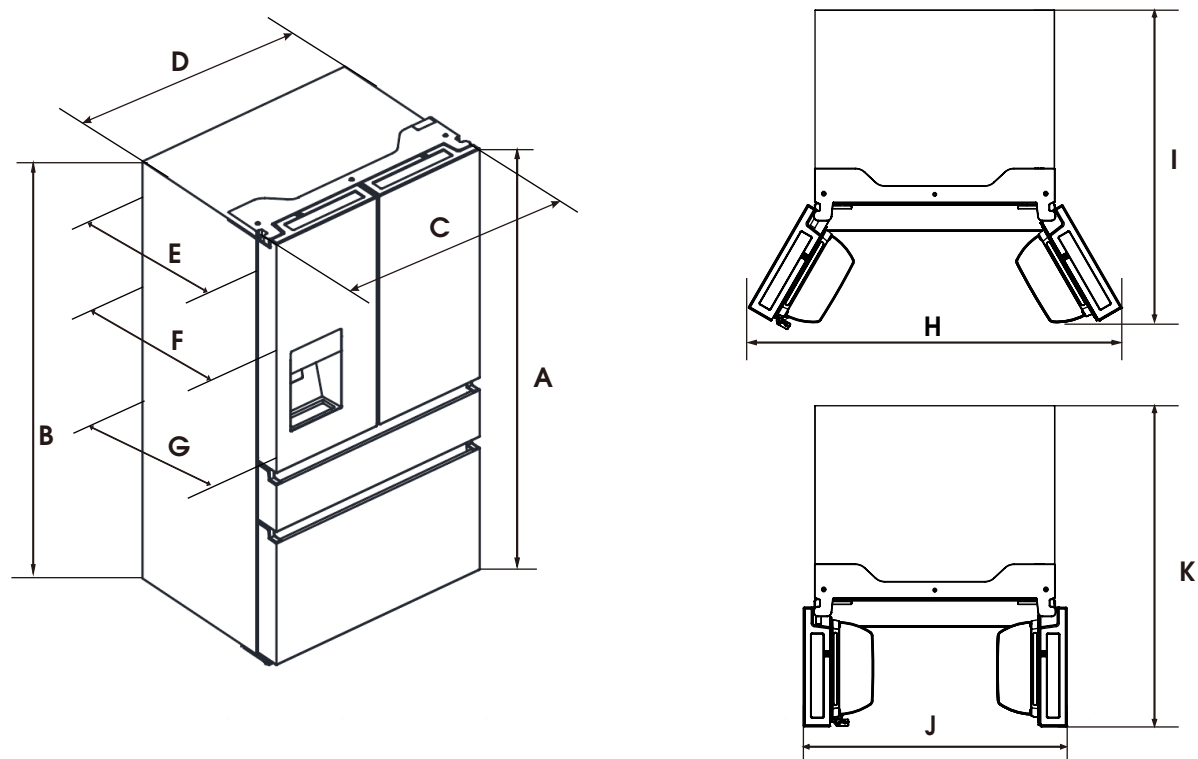

Model	Capacity	Height-Overall "A"	Height-Top of Cabinet "B"	Width-with Door "C"	Width-with Cabinet "D"	Depth-with Cabinet "E"	Depth-with Handle "F"	Depth-with Door "G"	Width-Doors Open 125° "H"	Depth-Doors Open 125° "I"	Width-Doors Open 90° "J"	Depth-Doors Open 90° "K"
HRM260N6TSE	25.6 cu.ft	70.3" (1785mm)	69.0" (1752mm)	36.0" (914mm)	35.8" (908mm)	28.7" (730mm)	33.7" (855mm)	33.7" (855mm)	61.4 (1560mm)	47.2" (1200mm)	39.4" (1000mm)	48.0" (1220mm)

LOCATION REQUIREMENTS

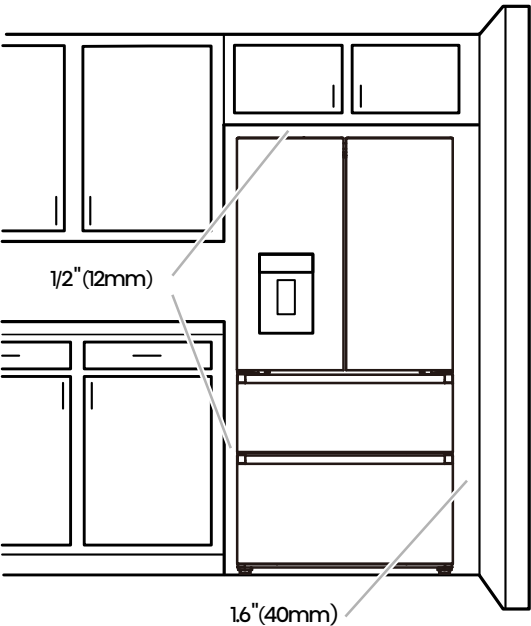

To ensure proper ventilation for your refrigerator, allow for a 1/2"(12mm) space on each side and at the top. Allow at least 2.0"(51mm) between back of cabinet and the wall. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 1.6"(40mm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55F(13°C) to a maximum of 110°F(43°C).