

ASSEMBLY INSTRUCTION




Notice:


- 1. 50% Tighten before fixing all screws, Allen wrench is recommended instead of an electric drill.
- 2. Place the item on a flat ground to adjust and make sure it remains stable.
- 3. Tighten up all screws with tools gradually.
- 4. If the screws are not aligned with holes during assembly, please loosen all the other screws to 50% and continue the assembly process.
- 5. If the item is not stable, please loosen all the screws, adjust it on a flat ground and tighten up all screws again.
- 6. Note: If one or some screws are fully tightened during assembly, chances are the others will not be aligned with holes. In addition, all the holes are designed to be relatively larger to provide more space for the adjustment of the screws.

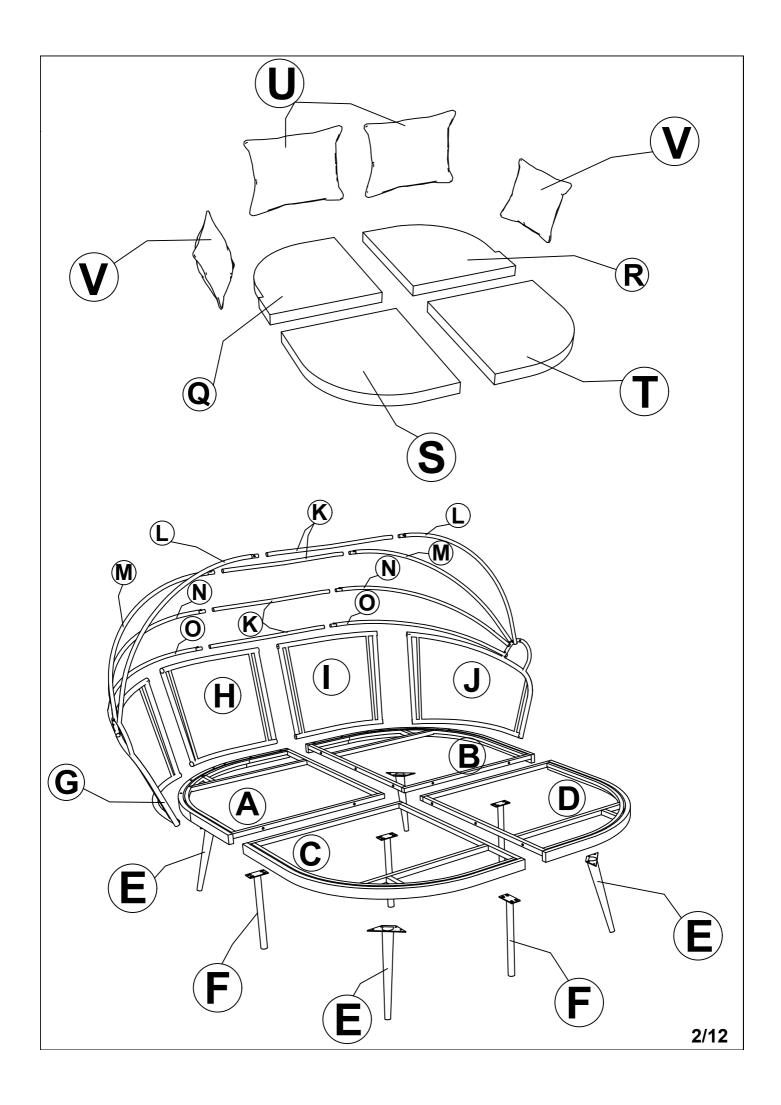


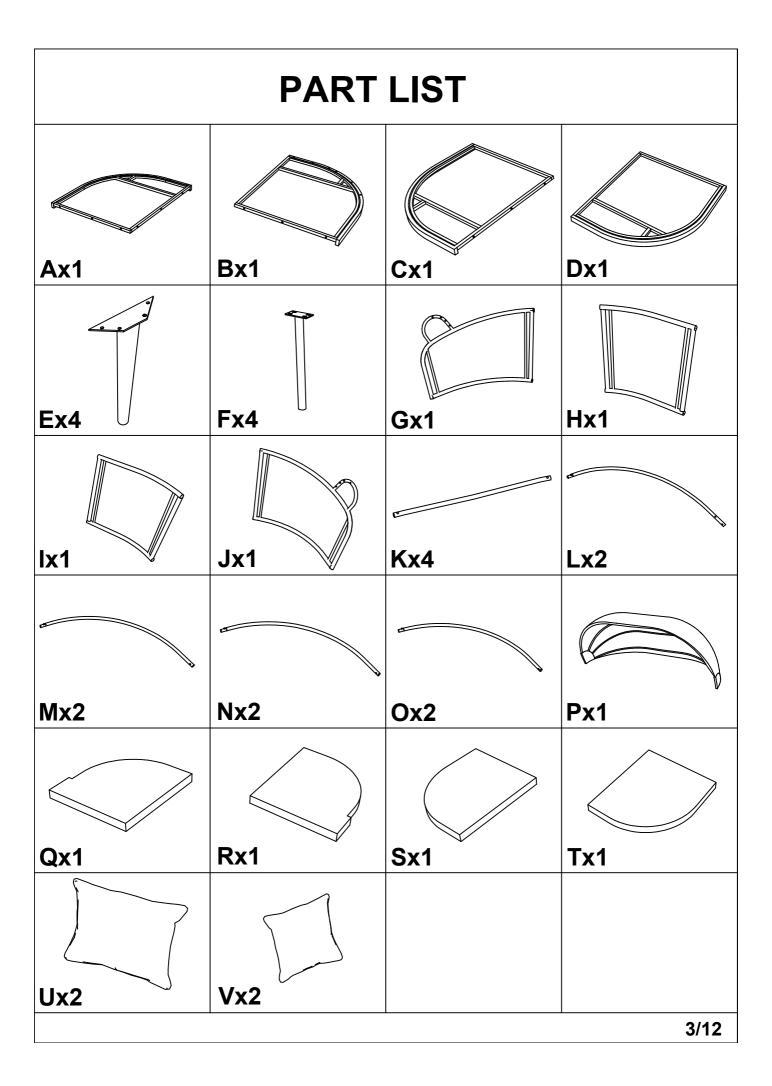


HARDWARE LIST 1 -Washer : 88 pcs Extra : 2 pcs **2-** Bolt 6x15: 44pcs Extra : 2 pcs 3- Bolt 6x25: 4 pcs **4-** Bolt 6x40: 12 pcs Extra: 2 pcs **8-** Washer plastic 2mm: 8 pcs **7-** Nut : 8 pcs **5-** Bolt 6x45: 8 pcs 6- Bolt 6x55: 12 pcs Extra: 1 pcs Extra: 1 pcs **9-** Washer plastic 5mm: 11 - Keeper Plate:6pcs 10-Plastic snap: 8 pcs **12-**Gas bar : 2 pcs 4 pcs 14- Key: 1 pcs 13-Allen key: 2 pcs 4/12

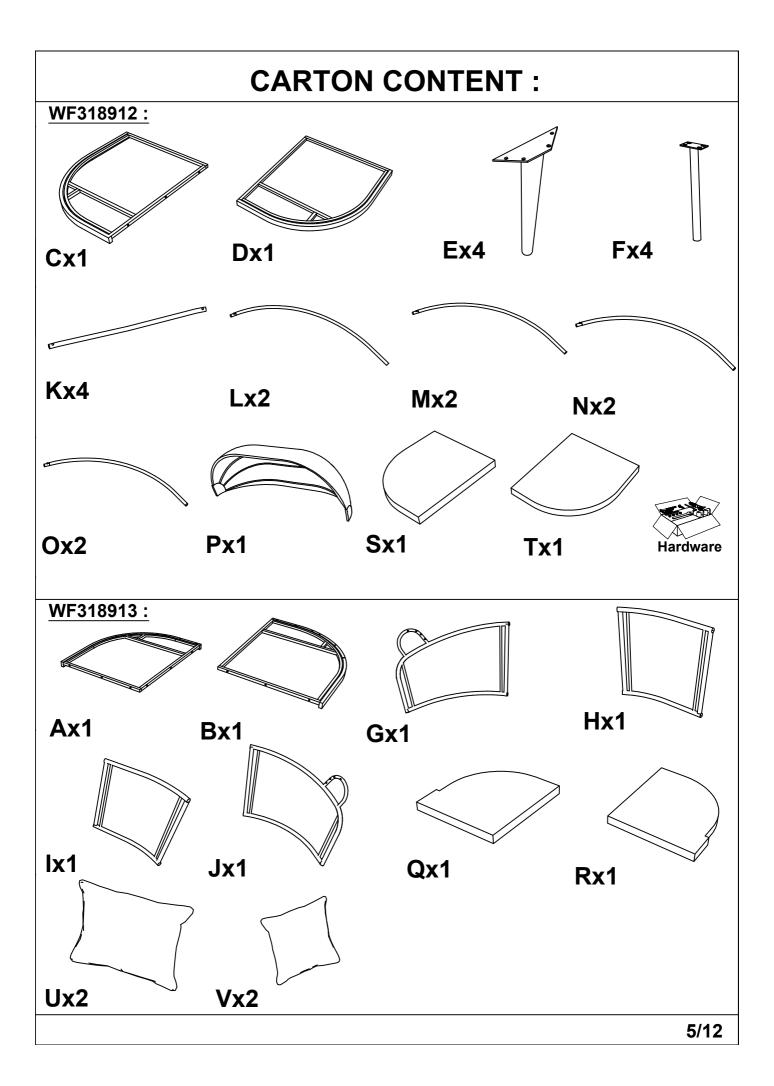

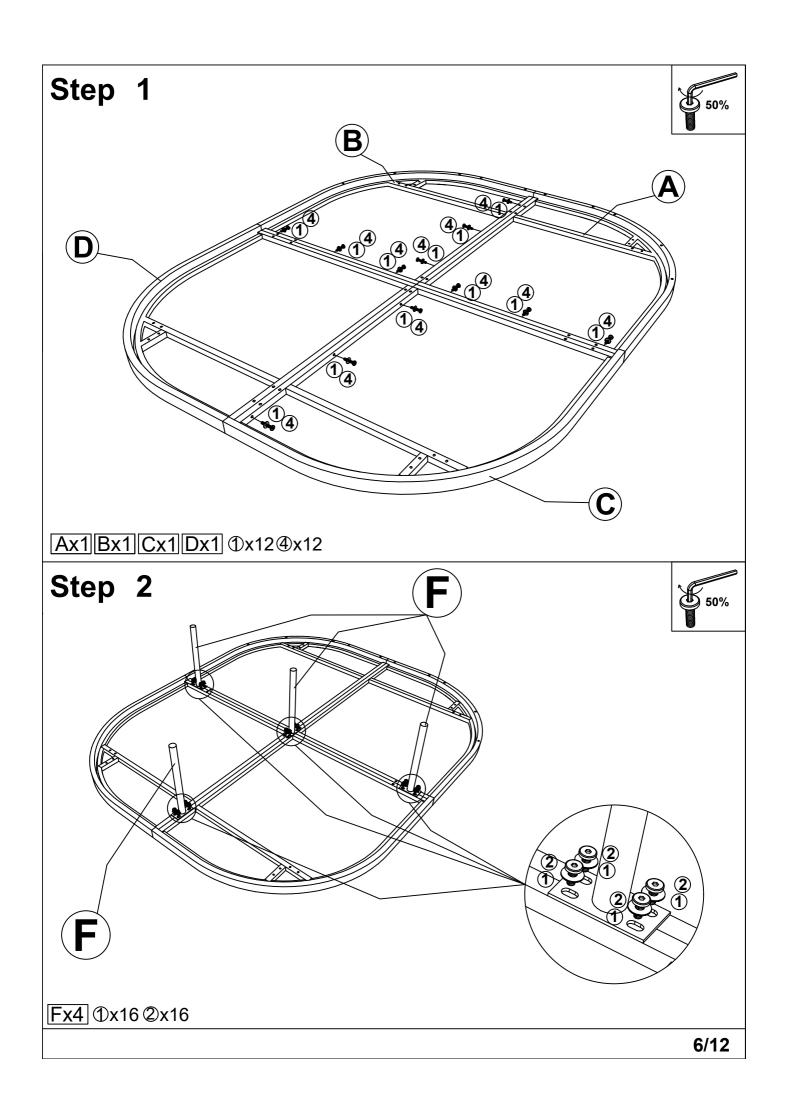


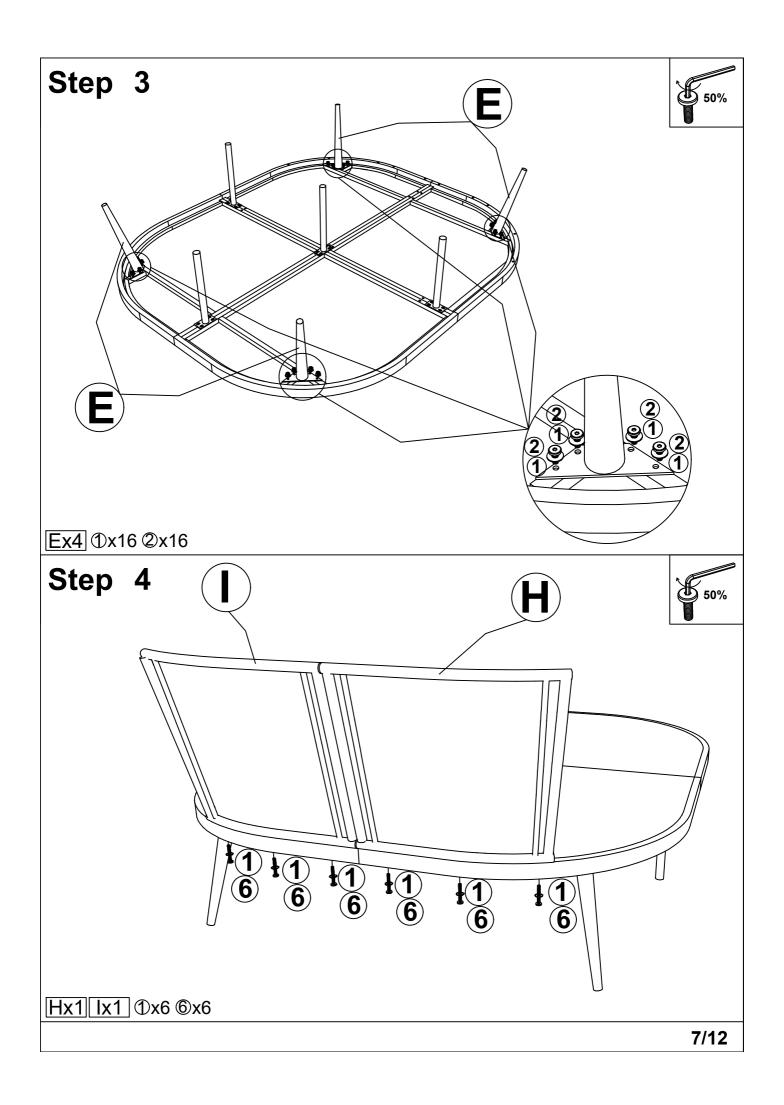

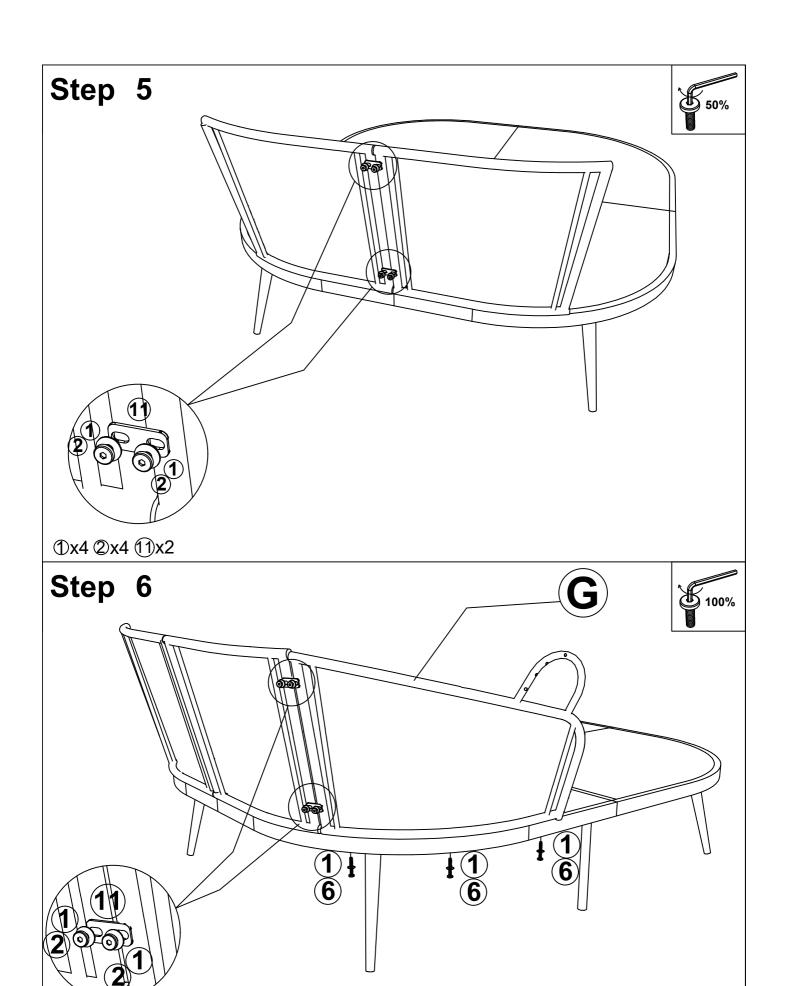


Gx1 ①x7 ②x4 ⑥x3 ①x2

8/12

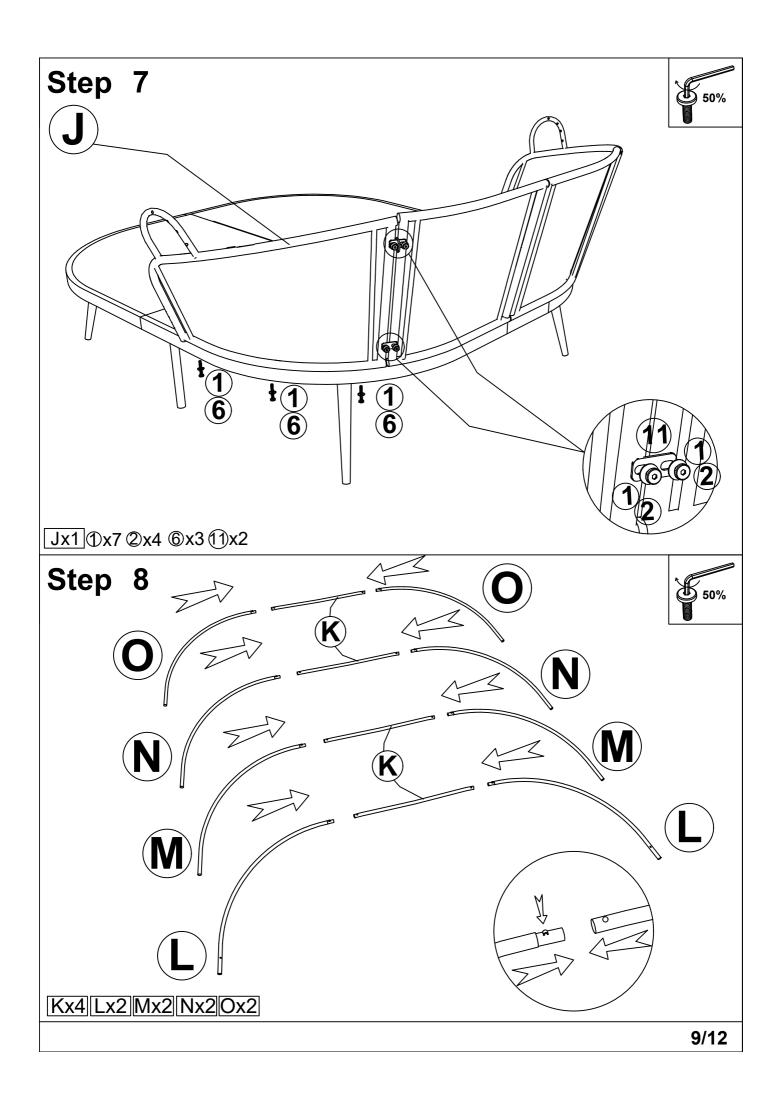

Step 9



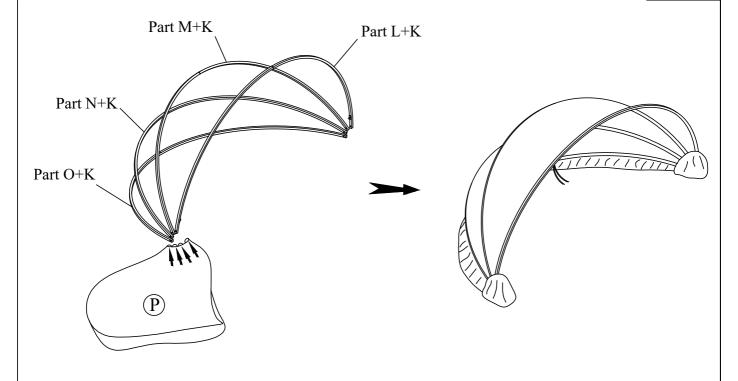

Px1

