


Installation Method


2. Install the body on the toilet

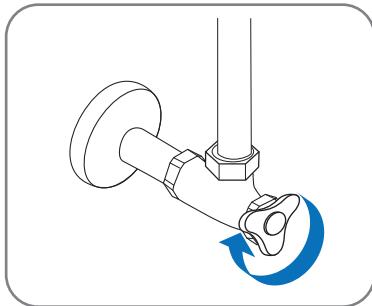

1. Close the water supply

Turn the water supply valve clockwise to close it.

Avoid water splashing before installing the product.

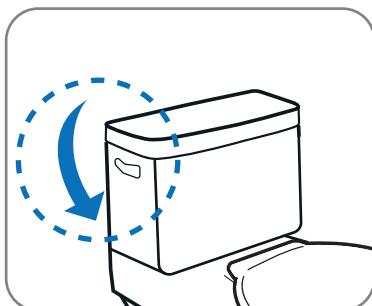

2. Empty the toilet tank

Press the lever to drain the water from the tank until it is completely empty.

It is not a problem even if there is a little water left before installing the product.





3. Disassembling the existing toilet seat


Unscrew the toilet seat fixing cap by flipping it upwards.

While unscrewing, hold the bolt on the underside of the screw with your other hand to secure the screw to loosen.

(Please follow the instruction of your toilet seat manufacturer if need assistance)

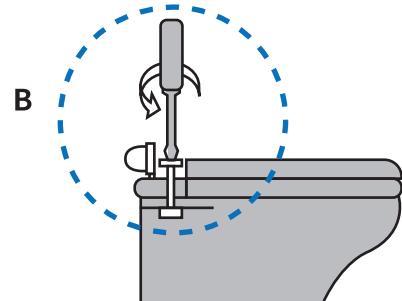


Installation Method

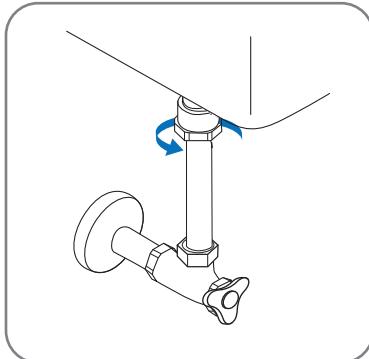

4. Water connection


Disconnect the toilet hose connected to the water supply valve.

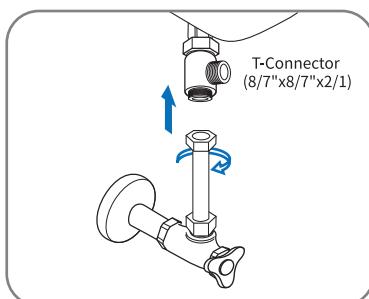


Connect the T-Connector to the water tank supply inlet.

Connect the T-Connector with the toilet hose.

Tightly connect the water supply valve, T-Connector, and toilet hose to prevent any leakage.

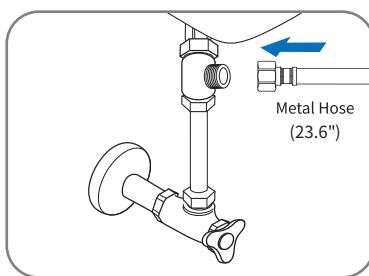

Combine Metal Hose and T-Connector.

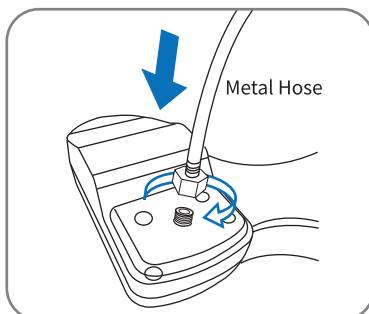

5. Finish the connection

Attach to the Metal Hose connector to the product.

Tightly connect the product and the Metal Hose so that there is no leakage.



Installation Method



6. Attached to the toilet


After placing the product on the toilet, adjust the position of the product up/down and left/right.

Make sure the nozzle is centered.

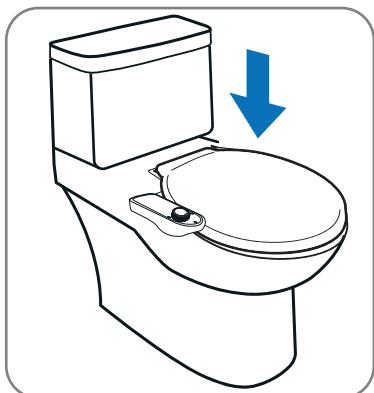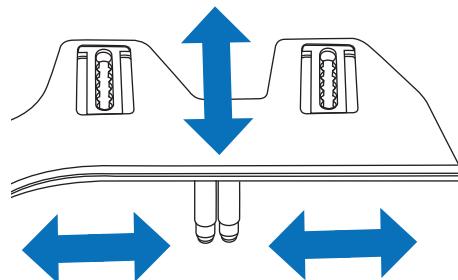


Put the toilet seat on top of the product and reassemble it.

Check again that the product does not move or fall out.

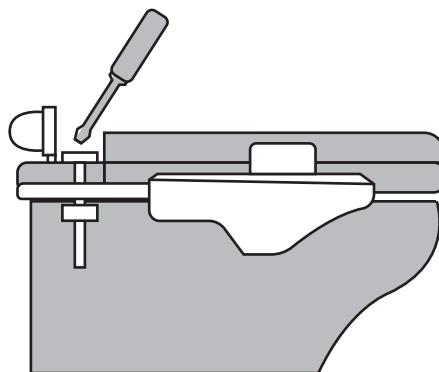

7. Open the water supply

Turn the water supply valve counterclockwise to open it.

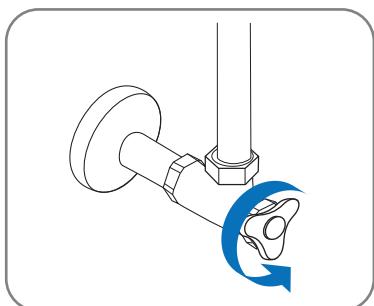

※ Please check on each connection that make sure there are no water leakage.