

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Farmhouse style with a modern elegance fixed track lighting kits combine style, easy installation, and energy-saving LED benefits all in one package. These versatile, multi-directional track heads are available in one, three, or four lamp configurations in a brushed nickel finish will make a lovely luminary statement in your space. These can be installed as ceiling or wall mount allowing these fixtures to be installed as a sconce or vanity to any kitchen, bathroom, bedroom, or main living areas. Ideal contemporary lighting solutions for a variety of residential applications such as multi-family units and hospitality.

CONSTRUCTION

Fixture heads are multi-directional. Adjustable heads allow you to aim light where necessary (90° horizontal rotation, 180° vertical aiming). For Ceiling or Wall Mount Applications. Each seeded glass shade is unique. Variation in size and shape of seeds is natural to the handcrafted process. Track made of steel and intended to be installed to a 4" x 4" square or octagonal metal junction box. Available in brushed nickel finish.

ELECTRICAL

120 VAC 60Hz (line voltage) Lumen output: 420 lumens per track head, 50° beam angle

40,000 hour L70 rated life

Lumens/Watt = 56 (minimum)

2700K color temperature, 90 CRIDimming down to 10%. See Dimmer compatibility chart on page 2.

LISTINGS

Damp location. ETL listed for US and Canada. ENERGY STAR certified. Can be used to comply with Title 24, Part 6 (JA8-2016).

WARRANTY

5-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Decorative Track Lighting

LTFSGL Fixed Seeded Glass Series

Integrated LED Fixed Track Kit



1-Light



3-Light






4-Light

Specifications

1-Light:	3-Light:	4-Light:
Height: 7-3/8 (18.7)	Height: 7 (17.8)	Height: 7 (17.8)
Length: 4-7/8 (12.4)	Length: 22 (55.9)	Length: 30-3/8 (77.2)
Depth: 4-7/8 (12.4)	Depth: 4-5/8 (11.7)	Depth: 4-5/8 (11.7)

All dimensions are inches (centimeters) unless otherwise indicated.

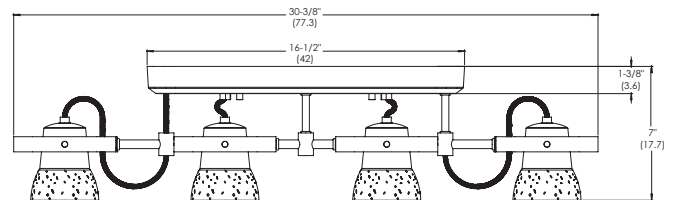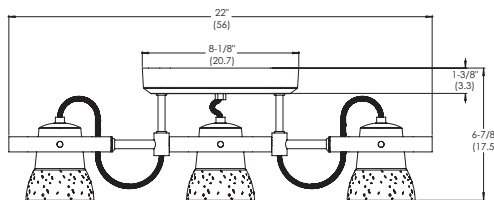

ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

Example: LTFSGLS LED 27K 90CRI BN


LTFSGLS	LED	27K	90CRI	BN
Series	Integrated LED, Lumen output	CCT	CRI	Finish
LTFSGLS 1-Light Linear Seeded Glass Fixed Track Kit	LED 7W, 420 lumens (per head)	27K 2700 K	90CRI 90 CRI	BN Brushed nickel
LTFSGL3 3-Light Linear Seeded Glass Fixed Track Kit				
LTFSGL4 4-Light Linear Seeded Glass Fixed Track Kit				

LTFSGS Seeded Glass LED Fixed Track

PHOTOMETRICS

Distribution Curve Distribution Data Zonal Lumens Coefficient of Utilization Illuminance Data at 30" Above Floor for a Single Luminaire

LTFSGS LED 27K 90CRI BN, 2700K LED's, input watts: 8.04, delivered lumens: 459.5, LM/W = 57.15 test no. ISF-38293, tested in accordance with IESNA LM 79-80

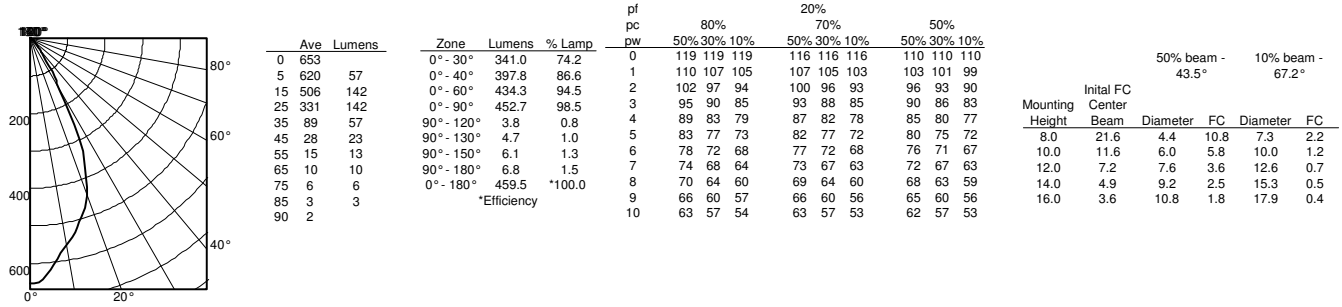

DIMMER COMPATIBILITY

COMPATIBLE DIMMERS		
Lutron	Leviton	Pass & Seymour
DV-600PR	6631-1LT	LSLV603PW
CT-600PR		
TGCL-153PH-LA		
LGCL-153PLH		