



Overhead Hood

FHWC3040MS

30" Under-Cabinet



Signature Features

Halogen Lighting

For bright illumination of the cooktop surface.

Washable Filters

Dishwasher safe for easy cleaning. The aluminum filter provides strength and durability not found in foam filters.

Convertible Exhaust System

Our convertible hoods allow you to select between external or recirculating exhaust.

Nonstick Coating

The nonstick surface of the underside of the range hood allows for quick and easy removal of grease and soot.

Features

Nominal Width	30"
Installation Type	Under-Cabinet
Style	Hidden
Controls	Mechanical Push Button
Air Discharge	Vertical or Horizontal
Air Delivery (CFM)	330
Blower Type	Fan
Sound Level (dBA)	68.2
Fan Speeds	3
Cooktop Light(s)	2 Halogen (50W - Included)
Dishwasher-Safe Filter(s)	Yes
Exhaust Duct	Convertible ¹
Duct Required	7" Round or 3-1/4" x 10"

Optional Accessories

Charcoal Filter	PN# 5304486303
Duct-Free Kit (Single-Pack)	PN# 5304455849
Duct-Free Kit (8-Pack)	PN# DFKIT308PK
Damper Kit (6-Pack)	PN# DAMPKIT6PK
7"-Round Damper Kit (Single-Pack)	PN# 5304455851

Specifications

Product Dimensions -	
Height	4-15/16"
Width	30"
Depth	19-3/4"
Voltage Rating	120V / 60Hz / 15A
Connected Load (kW Rating) @ 120 Volts ²	.23
Amps @ 120 Volts	1.8
Shipping Weight (Approx.)	24 Lbs.
Sones Rating	7.7

¹Ventilation is convertible to be either ducted outside, or recirculated inside requiring no ducting.

²For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.


NOTE: Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.

Specifications subject to change.

Available in:



Stainless (S)

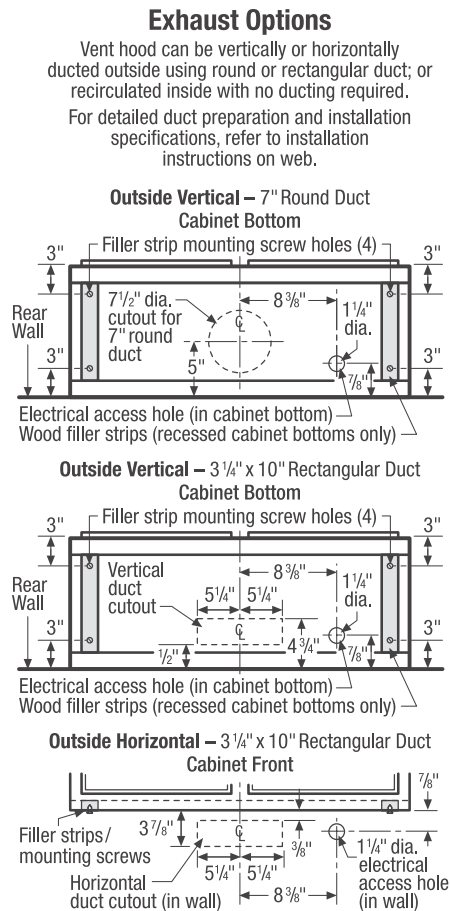

Ducting Option Specifications

- Vent system MUST terminate outside through roof or wall; do NOT terminate into attic or other enclosed area.
- Exhaust Duct Required – 3-1/4" x 10" rectangular with 35' maximum vent length or 7" round with 50' maximum vent length. Refer to Product Installation Guide on web for calculations needed to determine total duct length.
- Installation of 7" Round Duct requires use of 7" Round Transition Duct (included) and can only be vented vertically.
- To provide efficient performance, length of vent system and number of elbows should be kept to minimum. Flexible vent greatly reduces performance and is NOT recommended.
- Use 3-1/4" x 10" rectangular metal vent only – rigid metal vent recommended; plastic or metal foil vent NOT recommended.
- For cold weather installation, additional backdraft damper and thermal break should be installed. Thermal break will minimize conduction of outside temperatures as part of the vent system with damper on cold air side of break, as close as possible to where vent system enters heated portion of house.
- Refer to Product Installation Guide on web for detailed vent system preparation instructions.

Optional Accessories

- Charcoal Filter – (PN # 5304486303).
- Duct-Free Kit (Single-Pack) – (PN # 5304455849).
- Duct-Free Kit (8-Pack) – (PN # DFKIT308PK).
- Damper Kit (6-Pack) – (PN # DAMPKIT6PK).
- 7"–Round Damper Kit (Single-Pack) – (PN # 5304455851).



Specifications
subject to change.

Printed in Canada