HISENSE REFRIGERATOR

HRF266N6CSE1

Pureflat Series Standard Depth French Door Refrigerator

Large Capacity 26.6 cu.ft.
Installed Ice maker in Freezer
Internal Water Dispenser
Premium Flat Door Design
Metal Recessed Handle
Flexible Sliding Shelf

AVAILABLE COLORS



Fingerprint-Resistant Stainless Steel



REFRIGERATOR





Hisense


PERFORMANCE						
Refrigerator (cu. ft.)	18.8					
Freezer (cu. ft.)	7.8					
Total Capacity (cu. ft.)	26.6					
ENERGY STAR® Certified	Yes					
Energy Consumption (kWh/Year)	628					
Safety Listing	UL Safety Listing					
ICE & WATER SYSTEM						
Ice and Water Dispenser Type	Both					
Ice / Water Location	Internal Water Dispenser					
Ice Maker	Single in Freezer					
Ісе Туре	Cubed					
Daily Ice Production	3.3 lbs					
Ice Storage Capacity	5.3 lbs					
Removable Ice Bin	Yes					
Water Filtration	Yes					
Filter Model	HX2017F-A					
Water Inlet Pressure	207~700kPa					
COOLING SYSTEM						
Temperature Sensors	2					
Compressor Type	Durable Inverter					
Refrigerant (Type and Volume)	R600a/2.19oz(62g)					
Multi Air Flow Cooling	Yes					
Evaporator	1					
CONVENIENCE						
Display Type	Internal/ Smooth Touch / Blue LED					
Temperature Controls	Electronic/ Digital					
Door Alarm	Yes					
Auto Closing Door Hinge	Yes					
Leveling Legs	Yes					
Demo Mode	Yes					
Gallon Door Storage	Yes					
Noise Level (dB)	43					


Temperature Range (°F)	36°F~46°F					
Door Type	Side Swing					
No. of Shelves	4 Split (4 Fixed)					
Cantilevered Shelves	Yes					
Sliding Shelf	Yes					
Shelf Construction	Tempered Glass					
Shelf Trim	White Décor					
No. of Crisper Drawers	2					
LED Lighting	Yes (Ceiling LED)					
No. of Door Bins	6					
Door Bin Construction	1 Piece (Clear)					
FREEZER						
Temperature Range (°F)	-11°F~7°F					
Door Type	Pull-Out Drawer					
Drawers	2-Tier Organization					
Drawer Divider	Yes					
Diawei Dividei	res					
LED Lighting	Yes (Ceiling LED)					
	Yes (Ceiling LED)					
LED Lighting	Yes (Ceiling LED)					
LED Lighting MATERIALS AND FINISHES Fingerprint-Resistant	Yes (Ceiling LED)					
LED Lighting MATERIALS AND FINISHES Fingerprint–Resistant Door	Yes (Ceiling LED) G Yes					
LED Lighting MATERIALS AND FINISHES Fingerprint–Resistant Door Door Style	Yes (Ceiling LED) Yes Flat					
LED Lighting MATERIALS AND FINISHES Fingerprint–Resistant Door Door Style Door Texture	Yes (Ceiling LED) Yes Flat Smooth					
LED Lighting MATERIALS AND FINISHES Fingerprint–Resistant Door Door Style Door Texture Available Door Colors	Yes (Ceiling LED) Yes Flat Smooth Stainless Steel					
LED Lighting MATERIALS AND FINISHES Fingerprint-Resistant Door Door Style Door Texture Available Door Colors Handle Type	Yes (Ceiling LED) Yes Flat Smooth Stainless Steel Integrated					
LED Lighting MATERIALS AND FINISHES Fingerprint-Resistant Door Door Style Door Texture Available Door Colors Handle Type Hidden Hinges	Yes (Ceiling LED) Yes Flat Smooth Stainless Steel Integrated Yes					
LED Lighting MATERIALS AND FINISHES Fingerprint-Resistant Door Door Style Door Texture Available Door Colors Handle Type Hidden Hinges Toe Grille	Yes (Ceiling LED) Yes Flat Smooth Stainless Steel Integrated Yes No					

INSTALATION DIMENSION						
Product (W x H x D)	35.9*70.0*33.1"					
Width (Excluding Door)	35.8"					
Width (Including Door)	35.9"					
Common Width	36.0"					
Width (Door Open 90° Excluding Handle)	40.5"					
Width (Door Open 90° Including Handle)	40.5"					
Width (Door Fully Open Excluding Handle)	57.0"					
Depth (Excluding Handles)	33.1"					
Depth (Including Handles)	33.1"					
Depth (Less Door)	28.7"					
Depth (to Hinge Cover)	23.6"					
Depth (Door Open 90°)	48.5"					
Depth Type	Charadarral Danath					
Deptil Type	Standard Depth					
Height (to Top of Hinge)	70.0"					
Height (to Top of Hinge)	70.0"					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance	70.0" 70.0"					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case)	70.0" 70.0" 68.7" Sides 1/2", Top 1/2",					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2"					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D)	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7"					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D) Weight (Unit/ Carton)	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7"					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D) Weight (Unit/ Carton) INSTLIMITED WARRANTY	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7" 271lbs./ 295lbs.					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D) Weight (Unit/ Carton) INSTLIMITED WARRANTY Warranty	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7" 271lbs./ 295lbs.					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D) Weight (Unit/ Carton) INSTLIMITED WARRANTY Warranty Parts & Labor Sealed System (Parts &	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7" 271lbs./ 295lbs. 2-Year limited 2 Years					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D) Weight (Unit/ Carton) INSTLIMITED WARRANTY Warranty Parts & Labor Sealed System (Parts & Labor)	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7" 271lbs./ 295lbs. 2–Year limited 2 Years 5 Years					
Height (to Top of Hinge) Height (to Top of Door) Height (to Top of Case) Installation Clearance Carton (W x H x D) Weight (Unit/ Carton) INSTLIMITED WARRANTY Warranty Parts & Labor Sealed System (Parts & Labor) Accessories	70.0" 70.0" 68.7" Sides 1/2", Top 1/2", Back 2" 38.1*74.6*35.7" 271lbs./ 295lbs. 2–Year limited 2 Years 5 Years					

HISENSE REFRIGERATOR




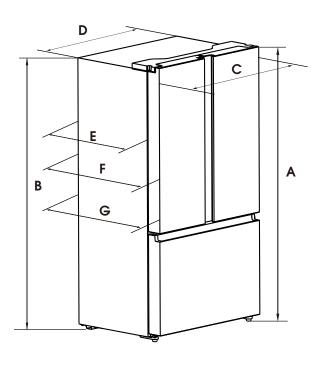

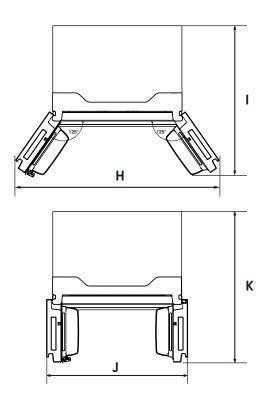

Model	Capacity	Height- Overall "A"	Height-Top of Cabinet "B"	Width-with Door "C"	Width-with Cabinet "D"	Depth-with Cabinet "E"	Depth-with Handle "F"	Depth-with Door "G"	Width-Doors Open 125° "H"	Depth-Doors Open 125° "I"	Width-Doors Open 90° "J"	Depth-Doors Open 90° "K"
HRF266N6CSE1	26.6 cu.ft	70.0" (1778mm)	68.7" (1745mm)	35.9" (912mm)	35.8" (908mm)	28.7" (730mm)	33.1" (840mm)	33.1" (840mm)	57.0 (1448mm)	47.4" (1204m)	40.5" (1029mm)	48.5" (1232mm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a 1/2"(12mm) space on each side and at the top.

Allow at least 2.0"(51mm) between back of cabinet and the wall. If your refrigerator has an ice maker, allow extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 1.6"(40mm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55F(13°C) to a maximum of 110°F(43°C).