

QUIETURETM

SoundBoard

LOWERS
NOISE UP TO
60dB

FLOORS • WALLS • CEILINGS

THE *Art* OF SILENCE



ACOUSTIC BARRIER

Deadens nuisance noise to create a more comfortable environment



LIGHTWEIGHT

Reduces overall weight of the structure



RECYCLED FIBER

Contributes to LEED credits



GREENGUARD GOLD CERTIFIED

Tested and proven low VOC's and no off-gassing



EASY INSTALLATION

Save time and money with simple installation methods





MADE IN THE USA



Great For Residential, Multi-Family, Commercial Spaces And More!

QUIETURE [qui • et • ure] VERB

The process or state of making something quiet

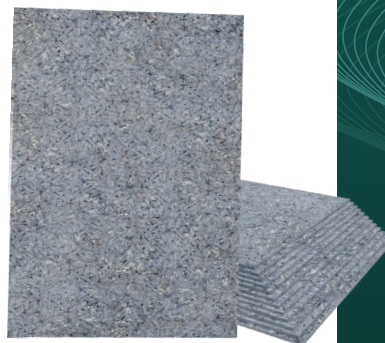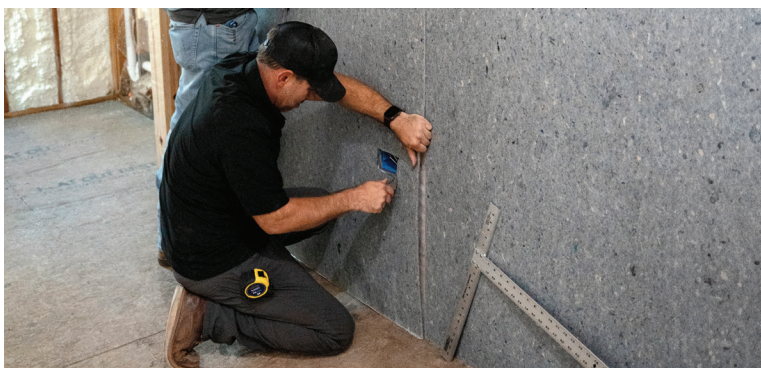

QUIETURETM

SoundBoard

INDUSTRY LEADING SOUND ABSORPTION



TECHNICAL DATA

Materials: 100% Recycled Fibers

Lip & Tape Included: No

Antimicrobial Protection: Yes

Weight: 0.55 lbs/ ft²

Thickness: 6 mm

Density: 22.608 lbs/ft³

Force Reduction: 13.1%

Compression Resistance: 496.8 psi

R-Value (@ 6mm): 0.73 hr-ft²-degF/Btu

Moisture Emissions Protection: 5 lbs/1000 ft²/24hrs

Approved Subfloors: All properly prepared concrete and wood materials

Flammability: Meets or exceeds Federal Flammability Standards: 1-70 (Pill Test)

Warranty: Transferable LTD Lifetime

Castor Chair Test Reached 25,000 Cycles

No VOCs / Antimicrobial Treated Fibers


Approved For Use With In-Floor Heating Systems

STC SOUND RATINGS




GOOD
STC 43

- 1/2" Drywall
- 2x4 Wood framing
- Framed on 16" centers
- **Quieture SoundBoard**
- 1/2" Drywall



BETTER
STC 48

- 1/2" Drywall
- 2x4 Wood framing
- Framed on 16" centers
- R13 Fiberglass insulation
- **Quieture SoundBoard**
- 1/2" Drywall



BEST
STC 50

- 1/2" Drywall
- **Quieture SoundBoard**
- 2x4 Wood framing
- Framed on 16" centers
- **Quieture SoundBoard**
- 1/2" Drywall

PACKAGING



Size: 4'x8' & 2'x4'



Pallet Sizing:

4'x8': 100 sheets/pallet (3,200sf)

2'x4': 12 sheets/box & 16 boxes/pallet (1,536sf)



Truckload Quantities:

4'x8': 25 pallets/truck (80,000sf)

2'x4': 54 pallets/truck (82,944sf)

* OPTIONAL FACER



**Class C
Fire Rating**



**Thermal
Reflective Vapor
Retarder**

* Complies with ASTM F1482



USGBC
MEMBER

LEED CREDITS

MR 4.1 10% recycled content

MR 4.2 20% recycled content

MR 5.1 10% content manufactured within 500 miles of project

MR 5.2 20% content manufactured within 500 miles of project

MPglobalTM

2500 Old Hadar Road, PO Box 2283 Norfolk, Nebraska 68702-2283
(877)939-9088 - Toll Free • info@MPGlobalProducts.com

PROUDLY
Made in the U.S.A.

DOC#712305 REV0925