MOEN®

Specifications

DESCRIPTION

- Reflex[™] pulldown system offers smoother operation, easy movement and secure docking
- PowerClean[™] Spray Technology
- Metal Wand
- Duralock[™] quick connect installation
- · Metal construction with various finishes identified by suffix
- Pulldown spray with 68" braided hose
- High arc spout provides the perfect height and reach for prep sinks while the pulldown feature provides infinite maneuverability for food preparation tasks
- 360° rotating spout
- Flexible supply lines with 3/8" compression fittings

OPERATION

- Lever style handle
- Two-Function Spray Wand
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position
- Temperature controlled by 100° arc of handle travel

FLOW

• Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE


- 1255[™] Duralast[™] cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 😓 for lever handle
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



Weymouth™ Single-Handle High Arc Pulldown Bar Faucet

Models: S53004 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

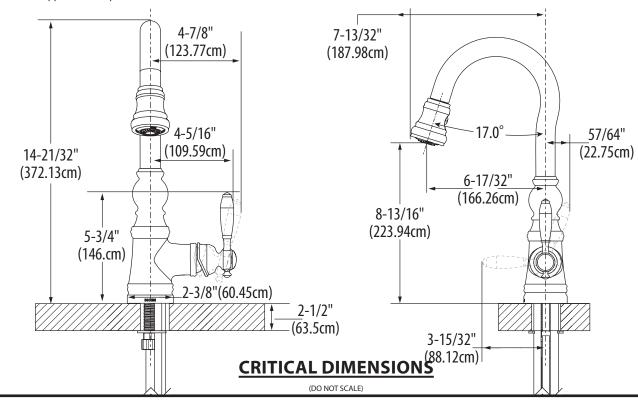

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com