




LOS FLEXI
CRAFTING YOUR HOME STORY

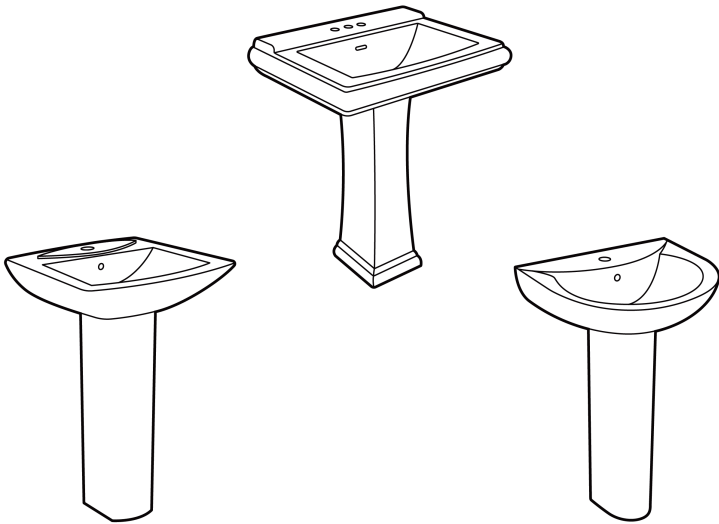

Pedestal Sink

INSTALLATION & CARE GUIDE

www.losflexi.com
Email: cs@losflexi.com

TABLE OF CONTENTS:

PRIOR TO INSTALLATION _____ 3

TOOLS AND MATERIALS REQUIRED _____ 4

PACKAGE INCLUDED _____ 5

INSTALLATION STEPS _____ 5

PRODUCT CLEANING & CARE _____ 9

TROUBLESHOOTING GUIDE _____ 9

IMPORTANT CONSUMER INFORMATION _____ 10

LIMITED WARRANTY COVERAGE _____ 12

PRIOR TO INSTALLATION:

Hello, Bath Makeover Master!

TIME TO DAZZLE YOUR BATHROOM!

PLACING YOUR SWANKY PEDESTAL SINK

Thrilled doesn't even begin to cover how we feel about you choosing our pedestal sink to add a dash of sophistication to your bathroom. Kicking off this spruce-up project is going to be as exciting as finding an extra scoop of ice cream in your bowl. We're here to ensure everything goes as smoothly as a jazz tune.

Before You Dive In:

- Quick tip before you start - turn off your water supply and double-check those pipes. It's like checking your parachute before a skydive.
- Make sure your wall is tough enough to handle the sink's charm (and weight). We need it strong and sturdy, ready to hold up against anything.
- For that flawless fit, bringing in a pro is like having a sous-chef in a gourmet kitchen - they just know how to make magic happen.
- Slap on that safety gear because looking cool and staying safe is the new trend.

Friendly Forewarnings:

- Our sinks are like delicate treasures. Lift with care, or better yet, get a buddy to help.
- When it comes to connecting parts, think of it like hugging a teddy bear. Too tight, and you might just squish the fluff out of it. Keep it snug, not strangled.

Installation Essentials:


- Our basin and its base are a dream team. No lone wolves here - keep them together.
- Stick to the book with plumbing and building codes. A little inspection before you start can save a day of work.
- Got a different setup? No worries. Just make sure you have the right gear to brace and fasten.
- A level install is a happy install. Keep everything on the straight and narrow for a picture-perfect setup.

All systems go for transforming your bathroom into the talk of the town! Hit a snag or just want to brag about your progress? We're all ears at cs@losflexi.com.

Eager to see your bathroom glow up with our pedestal sink!

Pedestal Sink Regards,
The Los Flexi Team

TOOLS AND MATERIALS REQUIRED (not supplied)

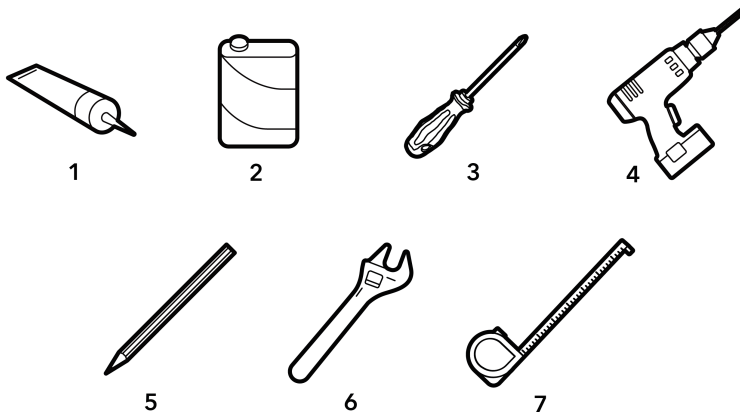


- ① Adhesive
- ② Acetone
- ③ Screwdriver
- ④ Drill
- ⑤ Pencil
- ⑥ Adjustable Wrench
- ⑦ Tape Measure

PROTECTIVE EQUIPMENT



Safety Glasses

PACKAGE INCLUDED



Sink Basin



Pedestal Sink Base




Mounting Kit

The illustrations are for display purposes only. For specific models and dimensions, please refer to the website, losflexi.com.

INSTALLATION STEPS


Wall Preparation

- For bathrooms with cavity walls, it's essential to provide adequate wall support for the mounting screws.
- We recommend using 2 x 6 inch plywood to ensure stability and strength for the installation.

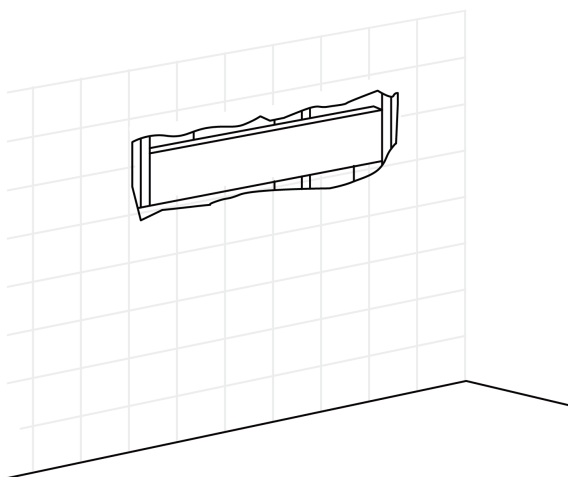

Determine The Sink Placement

- Mark the centerline on the floor.
- Set the base and the sink basin in its intended installation spot, check its level, and then outline where the mounting holes will be.

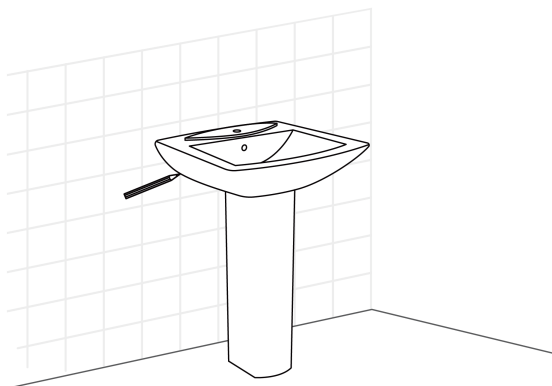


Drilling

- Drill holes at the marked spots on the wall and the floor (if needed) and insert the anchors and hanger bolts into the holes on the wall.


NOTE:

- ① Please wear safety glasses to prevent injury.
- ② The floor mounting screws are not included. Prepare them if necessary.

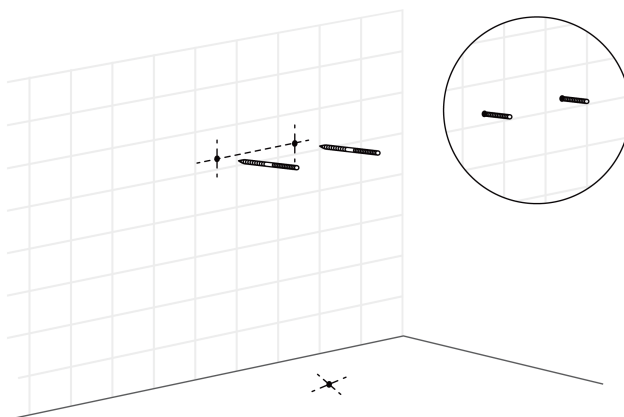

Attach The Sink Using Washers And Nuts


- Mount the sink onto the hanger bolts.
- Fasten it in place using insulation sleeves, washers, and nuts. Ensure not to tighten the bolts excessively as this could lead to chipping or cracking of the sink.

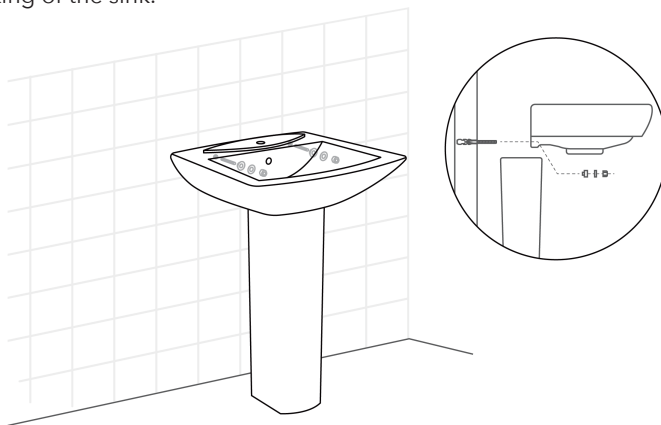

Assembling Plumbing Connections

- Fit the drain components as the provided guidelines and connect both the inlet and drainpipe fittings.

NOTE: Ensure the faucet, and all water inlet and drainpipe fittings are tightly secured to prevent leakage. After installation, it's crucial to check for any issues like water leaks.

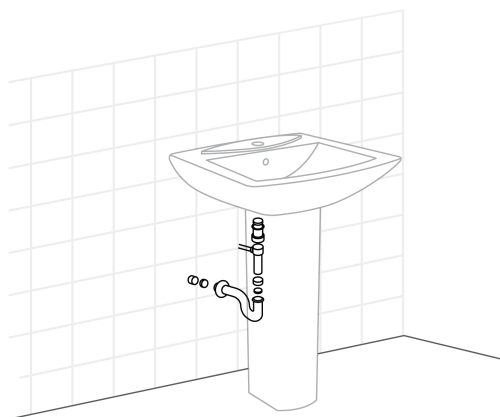


Securing And Sealing The Sink

- Once the sink is installed, position the base in its designated spot and secure it to the floor with screws (if needed).
- Apply adhesive to the area where the sink meets the wall. Use adhesive to the edge of the base if an extra sealing is needed.
- Clean any excess adhesive with acetone or denatured alcohol.

NOTE:

Avoid using epoxy resin glue or any other sealants that expand upon hardening.

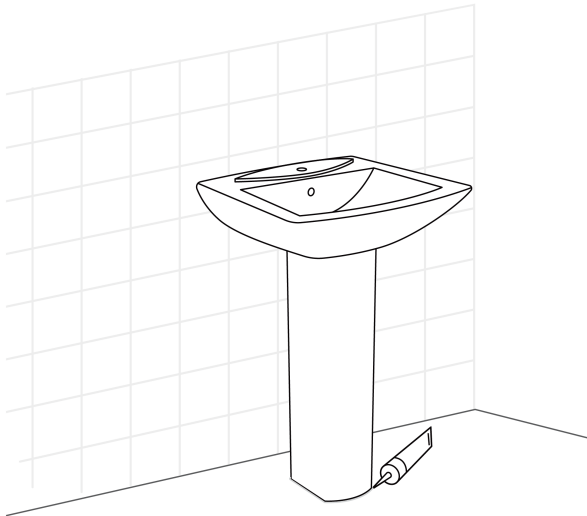

PRODUCT CLEANING & CARE

- **Regular Cleaning:** Clean the sink daily using a bathroom surface cleaner or a mixture of hot water, detergent, and white vinegar. This helps remove dirt, grime, and soap residues. Always wipe the sink with a fresh, dry cloth after cleaning.
- **Disinfection:** Use a disinfectant spray across the entire sink, letting it sit for 15 minutes before wiping it off. This helps maintain hygiene and cleanliness.
- **Addressing Stains:** For stubborn stains, use a baking soda paste or a white vinegar solution. Apply these solutions to the stained areas, let them sit for a while, and then scrub gently before rinsing.
- **Preventing Clogs:** Regularly clean the drain with a mixture of baking soda and vinegar, followed by hot water, to prevent clogs. Using a drain strainer can also help catch debris like hair and soap scum.
- **Maintenance and Safety:** Handle the sink carefully to avoid damage. Avoid using abrasive cleaners or metal pads that can scratch the basin. Be mindful of placing acidic or chlorine-containing products near the sink as they can cause stains.

TROUBLESHOOTING GUIDE

Leak

- Start by turning off the sink's water supply to create a safe working area for inspection and fixing any issues.
- Take apart the P-trap and check faucet connections for leaks, corrosion, or loose parts.
- Replace any worn-out gaskets or seals. Make sure to fit the new parts tightly to avoid future leaks.

Wobbly Pedestal Sink

- Loosen the wall bolts with an adjustable wrench, turning them counterclockwise just enough to allow minor movement of the sink.
- Remove the bolts fixing the base to the floor by turning them counterclockwise.
- Examine the area under the base for any irregularities, such as cracked tiles or shifted hardwood floors, and address these issues as found.
- Without securing it to the floor, place the base back and rest the sink on it. Use a wooden shim under the base to level, adjusting with more or fewer shims as required.
- Trim any excess shim material with a utility knife, then reattach the sink and base. Tighten its bolts carefully or use adhesive around the base to prevent damage.

Drainage Issues

- Dismantle the P-trap to get rid of any blockages. Clear out all debris before reassembling.
- For persistent clogs, try a plunger or drain snake. Begin with gentle pressure, then gradually increase as needed.
- If you're unable to fix drainage problems yourself, it's advisable to call in a plumber for expert diagnosis and repair.

IMPORTANT CONSUMER INFORMATION

Consumer Responsibilities For Pedestal Sink Maintenance

- Keep your sink in top shape by not placing overly heavy items on it. This helps prevent any damage or wobbles.
- Just like a beloved car, give your sink some regular love. Tighten up any loose parts to ensure it stays secure and stable.
- Stay on top of any drips or leaks from the faucet or pipes. Fixing them quickly prevents any pesky water damage.
- Keep that drain free from debris. A simple strainer does wonders, and don't forget to give the P-trap a good clean now and then. A plunger or drain snake can be your best friend for keeping those pipes clear.
- Treat your pedestal sink with kindness. Avoid rough cleaners and scratchy pads. Gentle, non-abrasive cleaners are the way to go, and make sure to follow any instructions they come with.
- If you're setting up a new sink, need a big fix, or have a complicated plumbing issue, it's always a good idea to call in professional help.
- Follow the manufacturer's guidelines for keeping your sink in shipshape. They know what's best for it, from installation to the right cleaning products.
- Make sure your sink is well-sealed and caulked. It's the best defense against unwanted water sneaking into places it shouldn't be.

WARNING

- DO NOT clean the sink with abrasive cleaners, scouring pads, or steel wool, as they can scratch and damage the surface.
- Be cautious when handling the sink, especially during installation. Pedestal sinks can chip or crack if dropped or knocked. Ensure that the sink is installed correctly and securely. Incorrect installation can lead to instability or even collapse.
- DO NOT put excessive weight on the sink. Pedestal sinks are not designed to hold heavy objects and doing so can cause damage or instability. Never stand or sit on a pedestal sink. It's not designed to support human weight and can break or become dislodged.

- Avoid exposing the sink to harsh chemicals, such as strong acids or bases, which can damage the finish.
- DO NOT place hot objects directly on the sink surface as they can cause cracking or discoloration.
- DO NOT attempt to modify the structure of the base or basin. Alterations can weaken the sink and lead to accidents.
- Be careful not to clog the drain with debris. Clogs can lead to backflow and water damage.

LIMITED WARRANTY COVERAGE

TWO YEAR LIMITED WARRANTY

Los Flexi products are crafted with superior materials and impeccable workmanship, offering our customers reliable and long-lasting products. If defects in materials or craftsmanship are detected under standard use within the first two years of installation, Los Flexi will either supply replacement parts at no charge or, if deemed necessary, replace the product or its parts.

This warranty is exclusive to the original purchaser, and proof of purchase is mandatory for any claim.

This Warranty Will Be Voided If:

- The product's installation did not follow our recommendations.
- The product was relocated from its initial installation site.
- The product underwent any modifications from its original condition.
- The product suffered from neglect, misuse, chemical overuse, accidents, or any other damages.

Los Flexi does not imply that our products adhere to local building or plumbing codes. Consumers must ascertain local code compliance before and during installation. This warranty is strictly for the original purchaser and first consumer.

Los Flexi won't be held responsible for any consequential damages linked to the product's installation, replacement, return, or usage. This includes, but is not limited to, freight charges, labor, downtime, home damages, and other associated costs (e.g., professional services, investigations, audits, legal fees). This Los Flexi warranty clearly delineates our liability. Items not specified in this warranty fall outside Los Flexi's responsibility. In states with variations concerning implied warranties, our compliance is ensured.

For any questions or concerns, feel free to reach out to us at

Email: cs@losflexi.com
Phone: (+1) 626-866-3163
Site: www.losflexi.com