

### Features

- Solid brass body
- Ceramic disc cartridge
- Single lever handle.
- 180 degree swivel spout
- Installation in a 1-3/8" hole
- 1-1/2" maximum deck thickness
- High arc spout with pull-out spray head
- Dual function ABS pull-out spray head - aerated stream or spray
- \*Pause function: Pressing small button will temporarily pause water from flowing through spray head. Useful when trying to fill more than one vessel without spraying water on the outside while spray head is moved from one vessel to the other.
- Magnetic docking keeps the pull-out spray head firmly in place with an integrated magnet, so it stays docked when not in use
- 1.8 gpm max. (6.8L/min) @ 60psi - saves 20% more water
- Flexible supply lines with 3/8" compression fittings

### Optional Accessories

- T3600 soap dispenser.

### Warranty

- Lifetime Limited Warranty for residential use
- 5 Year Limited Warranty for commercial use

### Specified Model


Model	T3540
Faucet Height	16 <sup>27</sup> / <sub>64</sub> " (415 mm)
Spout Reach	9 <sup>41</sup> / <sub>64</sub> " (230 mm)
Deck to Aerator	7 <sup>3</sup> / <sub>32</sub> " (220 mm)
Flow Rate	1.8 gpm max (6.8L/min) @ 60 psi
Shipping Weight	9 lbs.
Material	brass construction
Installation	deck mount, single hole

### To Be Specified:

	Finish
<input type="checkbox"/>	PC Polished Chrome
<input type="checkbox"/>	LS Luxe Stainless

### Codes/Standards

Certified to CUPC  
 Certified to AB1953  
 Certified to NSF/ANSI 61  
 Complies with Federal Lead Plumbing Law as certified with IAMPO R&T inc.  
 ADA complaint for lever handle

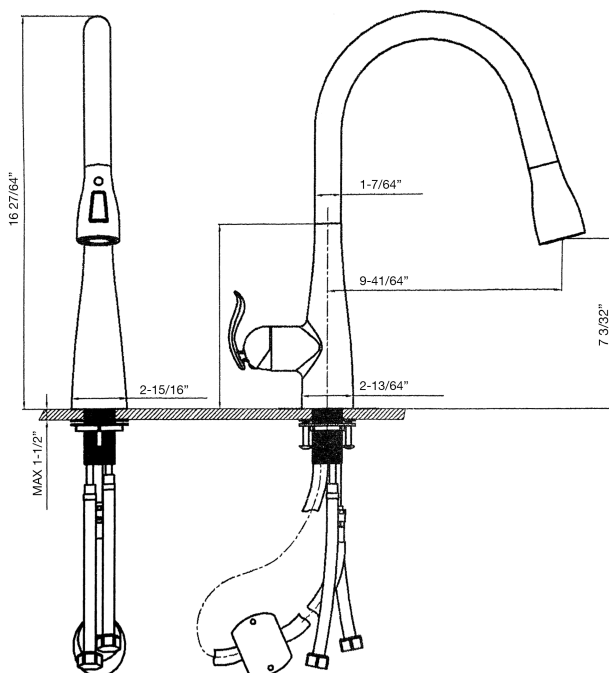

### Notes

Install this product according to the installation instructions.

\*Pause function limited to Luxe Stainless (LS) model only