

ASSEMBLY&INSTALLATION

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION


1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Make arms (16) and rod(17) through the holes on canopy(14). Fasten arms(16) and rod(17) into canopy (14) by washer(13) and wing nuts(12).
3. Make the wire through rod(17), fasten arms(16) against ceiling pan(19) by using studs(18).
4. Attach cross bar (6) to outlet box (not included) using outlet box screws (8).
5. Tie ground wire (4&11) from outlet box(1) and from fixture to the ground screw on the cross bar (6). Connect white wire(9) from fixture to white supply wire (2) from supply circuit. Connect black wire (10) from fixture to black supply wire (3) from supply circuit. Cover connections by using provided wire connectors(5).
6. Place canopy (14) onto cross bar screws (7) and secure with nuts (15).
7. Unscrew the finial(25) from the nipple(22). Then screw the nipple(22) into the bushing (20) using the hex nut (21).

ASSEMBLY AND INSTALLATION (CONT.)

8. Install the bulbs (Not included). Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label. Place the shade(23) and washer (24) over the nipple (22) and screw the finial (25) onto the nipple (22) until the shade (23) is held firmly to the fixture.

9. Turn on power

INSTALLATION IS NOW COMPLETED

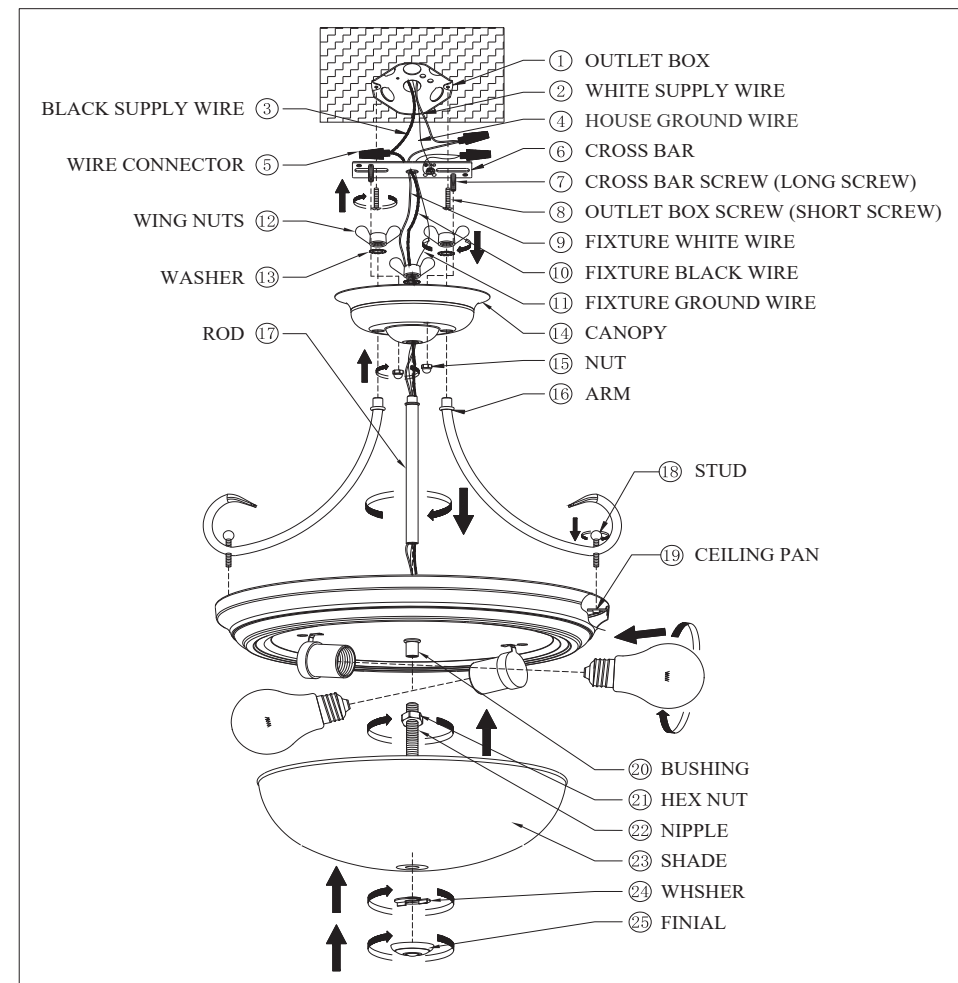

ITEM NO.: 4771, 4773, 4775