

PENDANT LIGHT

QUESTIONS OR CONCERNS CONTACT CANARM AT:

1-800-265-1833 (English) / 1-800-567-2513 (French) Monday through Friday 8:00 AM to 5:00 PM E.S.T.



"INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS"
"READ ALL INSTRUCTIONS"

"IMPORTANT SAFETY INSTRUCTIONS"

"SAVE THESE INSTRUCTIONS"

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters



Pliers



Wrench

Wiring supplies
as required by
the Canadian
Electrical Code
and/or the
Quebec
Electrical code


SAFETY PRECAUTIONS:

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. FIRMLY ATTACH THE FIXTURE GROUND WIRE (BARE COPPER) TO THE MOUNTING BRACKET WITH THE GROUND SCREW (BY WRAPPING AROUND THE GROUND SCREW) AND THEN CONNECT IT TO THE HOUSE SUPPLY GROUND WIRE WITH A WIRE NUT.
4. CLEAN GLASS WITH WATER ONLY.


NOTE: Product May Not Look Exactly As Shown In Figures.

INSTALLATION:

STYLE#1



STYLE#2



1. Refer to the mounting bracket style that matches the bracket that is included with your fixture.

Style#1 - Loosen hex nut "A" and "B". Adjust stud so it clears the fixture once assembled. Hold in place with "A" and lock in place with "B".


Style#2 (Threaded holes) Loosen "B". Adjust stud to desired length and lock in place with "B".

2. Attach the mounting bracket to the outlet box using electrical box screws (not included).

3. Adjusting the length of flexible cord. For safety, do not release the knot inside canopy.

STYLE #1 - Loosen the plastic screw for adjusting the length of flexible cord. Re-tighten plastic screw after adjusting.

STYLE #2 - Adjust the height of the fixture by pushing the button. Ensure the cord does not touch the light bulb (s) when adjusting the height of the fixture or the steel cable (s).

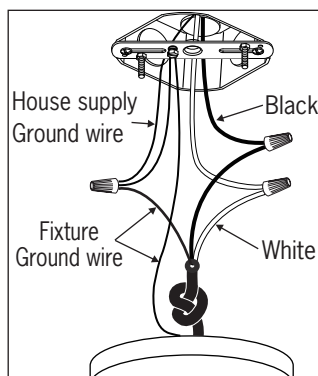

4. Firmly attach the fixture ground wire (bare copper) to the mounting bracket with the ground screw (by wrapping around the ground screw) and then connect it to the house supply ground wire with a wire nut. Connect the black wire (or wire marked "SPT-1") from the fixture to the black wire in the electrical box and connect the white wire from the fixture to the white wire in the electrical box.

5. Once connections of wires are completed, carefully tuck wires and wire nuts into the outlet box making sure no bare wire (on the black and white) is visible at the wire nuts. Install the light fixture to the wall by aligning the hole(s) in the fixture with the studs or nipple on the mounting bracket. Secure in place with cap nut(s) and star washer (s).

6. Mounting Glass To Fixture


NOTE: Refer to the style of assembly that matches the style of your fixture.

STYLE #1 - Using thumb screws provided, attach the glass to the fixture head. Place the glass into the fixture head and tighten screws into the groove or holes in the glass.


STYLE #2 - Remove spinner nut from socket. Position glass on lamp and secure with spinner nut. On some fixtures, a tool is included to attach the spinner nut.

STYLE #3 - Squeeze the two clips together around the socket. Slide the glass over the clips, then push the glass up snug to the fixture head.


7. If not already done, install proper bulb type and wattage (not included).



STYLE#1



STYLE#2



STYLE#3

