



4" & 6" White Round Canless Downlight

Applications:

- Recessed Canless Downlight
- New/Remodel Construction
- Residential/Commercial Lighting
- Use in your- Entryway, Kitchen, Office, Bathroom, Living Room, Hallway, Bar, & Restaurant, etc.

Product Information:

- 2 Hour Fire Rating
- Tested to Comply with UL 263, ASTM E119 & CAN ULC S101
- Reinforced and Heat Resistant Steel Casing
- 5CCT Selectable: 27/30/35/40/50K
- Junction Box with Commercial Grade Driver Included
- Triac-Dimmable from 5%-100%
- Easy Installation - Certified Airtight, IC rated





6.6"




1.5"



5 Kelvin Selectable



Snap Spring



Wire Terminals



Cable Mount Lock



Easy Installation



Cut Diameter Hole



Connect Wires Accordingly



Connect LED Panel to Driver



Insert Light Into Ceiling

4"

12 Watt
840 Lumens
Triac-Dimmable
Damp Location
5 Kelvin Temperature
Replaces 70W Bulb
Up to \$7.60 Savings
Per Year



6"

15 Watt
1050 Lumens
Triac-Dimmable
Damp Location
5 Kelvin Temperature
Replaces 70W Bulb
Up to \$9.01 Savings
Per Year



RETAIL READY STAND OUT PACKAGING




Packaging subject to size change based on product size






FIRE RATED

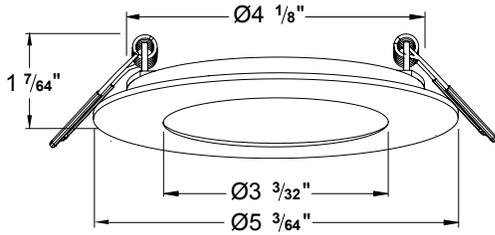

Hole Cut Size
Ø4 1/4" (108 mm)

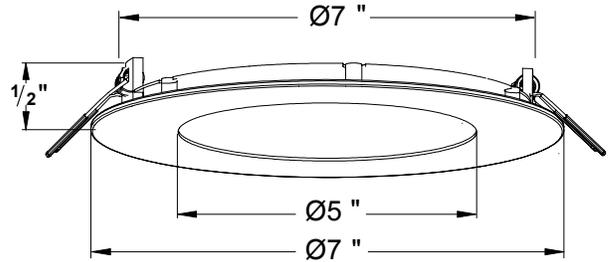

Hole Cut Size
Ø6 1/4" (158 mm)

4" LED WHITE ROUND CANLESS DOWNLIGHT

NW-P-DL-4-12W-5CT-FR-WH

LUMENS	840
WATTAGE	12W
VOLTAGE	120V
TRIM	WH- White
COLOR TEMP	27/30/35/40/50K
BEAM ANGLE	120°
LIFE HOURS	50,000
CRI	90
DIMMABLE	Yes

6" LED WHITE ROUND CANLESS DOWNLIGHT

NW-P-DL-6-15W-5CT-FR-WH

LUMENS	1050
WATTAGE	15W
VOLTAGE	120V
TRIM	WH- White
COLOR TEMP	27/30/35/40/50K
BEAM ANGLE	120°
LIFE HOURS	50,000
CRI	90
DIMMABLE	Yes

