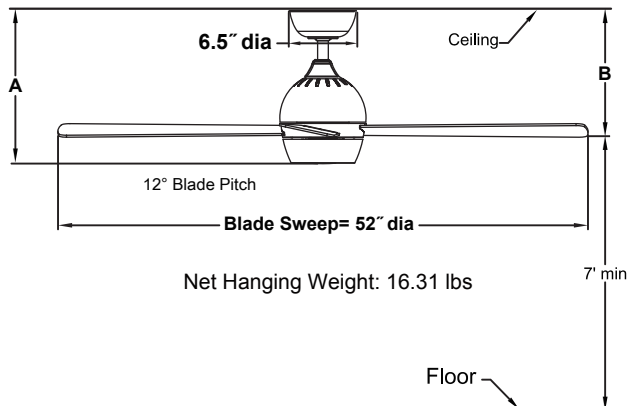


KWAD™ 52**FP7652******52" Ceiling Fan**

| | A | B |
|--------------------|--------|--------|
| Fan w/4.5" downrod | 15.05" | 12.27" |
| Fan w/12" downrod | 22.55" | 19.77" |
| Fan w/18" downrod | 28.55" | 25.77" |
| Fan w/24" downrod | 34.55" | 31.77" |
| Fan w/36" downrod | 46.55" | 43.77" |
| Fan w/48" downrod | 58.55" | 55.77" |
| Fan w/60" downrod | 70.55" | 67.77" |
| Fan w/72" downrod | 82.55" | 79.77" |

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 AC motor is designed for optimal performance with this fan.

BLADE SETS:

A set of four 23.47" plywood blades is included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH, WR501WH and CWRL4 wall controls, BTRC9 and CRL4WH hand-held remote controls and BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt dimmable LED included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling kits (SCB1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finishes

| | |
|----|---|
| BL | Black with Black Blade and Opal Frosted Glass |
| BN | Brushed Nickel with Brushed Nickel/Black Blade and Opal Frosted Glass |
| CH | Chrome with Black Blade and Opal Frosted Glass |
| DZ | Dark Bronze with Cherry/Dark Walnut Blade and Opal Frosted Glass |
| GR | Matte Greige with Weathered Wood Blade and Opal Frosted Glass |
| MW | Matte White with Matte White Blade and Opal Frosted Glass |

Airflow / Energy Efficiency Info (120V)

| Fan Speed | Max RPM | CFM | CFM / Watts | Amps | Watts |
|-----------|---------|------|-------------|------|-------|
| High | 170 | 4738 | 85 | 0.47 | 56 |
| Med | 127 | 3677 | 107 | 0.38 | 34 |
| Low | 77 | 2168 | 156 | 0.24 | 14 |

Energy Guide FTC

| Power (W _{ave}) | Total Air Delivery (CFM _{ave}) | Estimated Yearly Energy Cost (\$) | Ceiling Fan Efficiency (CFM/W) |
|---------------------------|--|-----------------------------------|--------------------------------|
| 37 | 3533 | 10 | 96 |

Light Bulb Information (120V)

| Bulb Type | Watts | QTY | Lumens Amount | Color Temp | CRI |
|-----------|-------|-----|---------------|------------|-----|
| LED | 18 | 1 | 1500 | 3000 | 90% |