

Barrier Free Shower Floors

SWANSTONE SHOWER FLOORS

With Fit-Flo Drain

Manufactured from Swanstone solid surface

(see page 2 for detailed information)

WARRANTY Limited Lifetime - Residential Limited 10-year - Commercial


FEATURES


- Reinforced solid surface means color and texture run all the way through and cannot wear away
- · Will not mold or mildew, no grout to clean
- Coordinates with Swanstone shower and bath systems
- Slip-resistant surface



	Nominal	Rough-In Dimensions					
Model	Size	60"	30"	8"	15"		
SBF-3060L Barrier Free (le	30" x 60" ft side drain)	60-3/8"	30-3/16"	8-3/16"	15-3/16"		
SBF-3060R Barrier Free (rig	30" x 60" ght side drain)	60-3/8"	30-3/16"	8-3/16"	15-3/16"		

IMPORTANT: Rough-in dimensions are provided for reference only. You must measure the actual shower floor and check local building code requirements before construction of the stud wall.

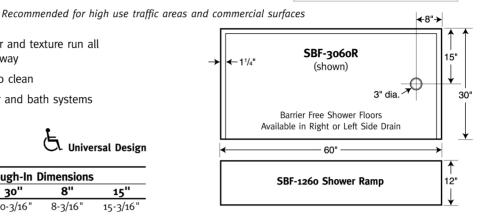



SPECIFICATIONS

Barrier Free Shower Floors With Fit-Flo Drain

			Ship	Ship	Carton	
Model	Part	Nominal Size Dimensions	Wt. Lb.	UPS	Dims. In.	Cu. Ft.
SBF-3060L	SBo3o6oLM	30" D x 60" W (left side drain) (762 mm x 1524 mm)	64	-	66 x 36 x 10	14
SBF-3060R	SBo3o6oRM	30" D x 60" W (right side drain) (762 mm x 1524 mm)	64	-	66 x 36 x 10	14
BF-1260	BF01260	12" D x 60" W (ramp) (305 mm x 1524 mm)	25	UPS	66 x 14 x 2	1.07

Kit Includes: One code approved compression molded Swanstone floor with molded-in Fit-Flo drain and complete installation instructions.

Packaging: Each floor packed in a rectangular carton.

ACCESSORIES

See page 109 for complete listing of all Universal Design accessories.

STANDARDS AND RATINGS

Class 1A fire rating

American National Standard Institute - ANSI Z124.1.2-2005 International Association of Plumbing and Mechanical Officials (IAPMO)—listed

cUPC listed—Certified to CSA Standard B45 by IAPMO

American Society for Testing and Materials National Electrical Manufacturers Association

National Sanitation Foundation-NSF Splash Zone, -NSF Food Zone

For a complete list of tests and results see the Technical Data Sheet – page 131.

SUPPORT DOCUMENTS

Installation instructions available on line at www.swanstone.com



COLORS

(See inside back cover for color sample.)

- White (010)
- Bone (037)
- Bisque (018)
- Almond Galaxy (046)
- Arctic Granite (035)
- Barley (091)
- Bermuda Sand (040)
- Gray Granite (042)
- Green Pasture (095)
- Sierra (094)
- Tahiti Blue (056)
- Tahiti Desert (050)
- Tahiti Evergreen (057)
- Tahiti Gray (053)
- Tahiti Ivory (059)
- Tahiti Matrix (058)
- Tahiti Rose (052)
- Tahiti Sand (051)
- Tahiti Terra (055)

- Tahiti White (011)
- Cornflower (063)
- Ironweed (061)
- Night Sky (012)
- Purple Sage (064) • Wild Indigo (022)
- Winter Wheat (o6o)
- Indian Grass (071)
- Pebble (072)
- Seafoam (074)
- Glacier (121)
- Prairie (122)
- Acorn (123)
- Canyon (124)
- Cloud White (125)
- Cloud Bone (126)
- Baby's Breath (168)
- Caraway Seed (169)

MAINTENANCE AND **CLEANING INFORMATION**

Everyday cleaning with liquid cleaners such as Dow or Lysol foaming bubbles, Top Job, Mr. Clean or similar type products with a sponge or Mr. Clean Magic Eraser. To remove hard water stains or mineral build-up, scale removers such as Lime Away, Rust-out or Whink are recommended. Abrasive cleaners are not recommended on shower bases because they are designed with high sheen areas to help prevent soap scum build up. Prolonged scrubbing will dull the surface over time and promote build-up and soap scum. Do not use "leave on" cleaning products such as the Automatic Shower Cleaner. Prolonged contact with harsh chemicals could have an adverse reactive over time and discolor your surfaces. Do not use cleaning agents that caution use on acrylic, polyester or plastics.