

- GT529-MTB Finish(B) ☐
- GT529-MTC Finish(C) ☐
- GT529-MTD Finish(D) ☐
- GT529-MTS Finish(S) ☐
- GT529-MTBG Finish(BG) ☐

- Auto Align Magnetic Spray Head
- Forward Handle Operation
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- 14" Extended Hose Length
- 360° Rotating Spout
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- Auto Align Magnetic Spray Head Docking
- Nylon Braided Hose
- Nylon Flex-Line Supply Lines
- Forward Handle Operation
- Pfister Connect™
- TiteSeal™ Technology
- Optional Deckplate Available, Order 961-258* Separately
- Pforever Seal
- Ceramic Disc Valve
- Pforever Warranty*


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

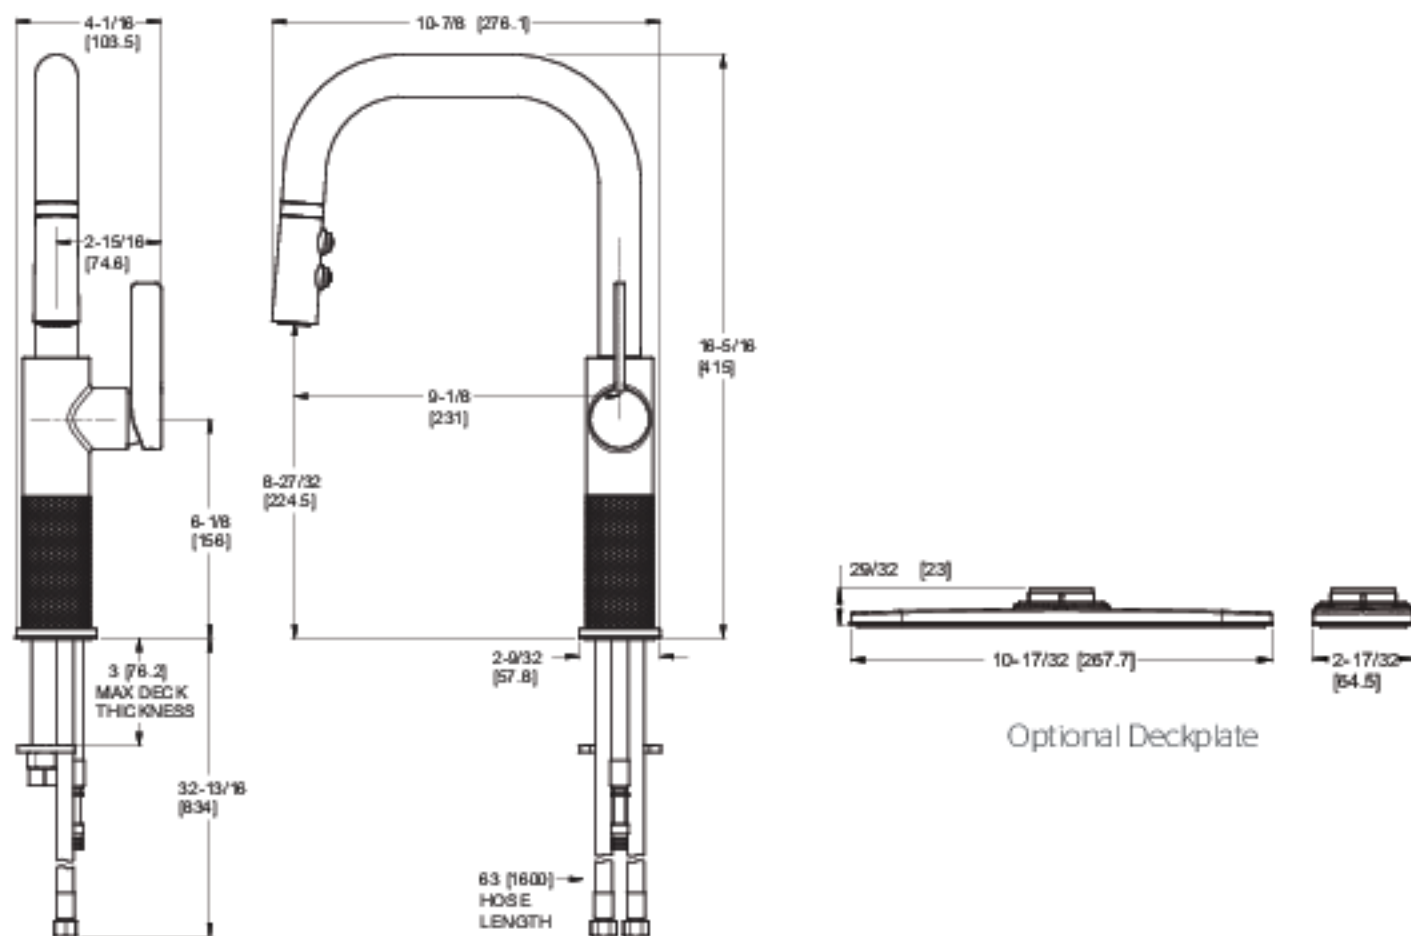

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings