


## SPECIFICATIONS

<b>Height</b>	23.875 in.
<b>Width</b>	23.875 in.
<b>Area</b>	4 sq. ft. (nominal)
<b>Features</b>	Recess 0.50 in. from tile face
<b>Collection</b>	Feather-Light
<b>Thickness</b>	0.013 in.
<b>Weight</b>	6.4 oz. (0.10 lb. per sq. ft.)
<b>Material</b>	Rigid vinyl
<b>Color</b>	White
<b>Finish</b>	Satin
<b>Cut-out</b>	6 in. cut-out available
<b>Perforation</b>	Available

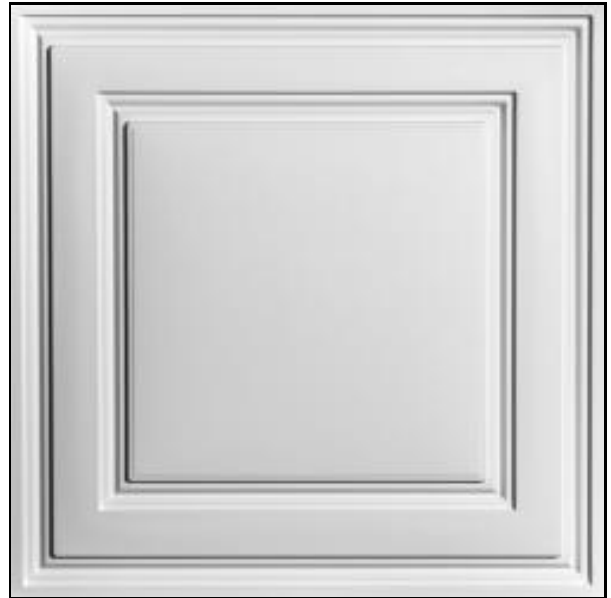

## INSTALLATION

<b>Installation Type</b>	Standard drop (15/16 to 1 in.)
<b>Borders</b>	Yes, this style may be trimmed for use along borders
<b>Direct Mount Grid</b>	Yes, this product may be used with direct mount grid
<b>Temp. Warning</b>	Not recommended for installation where ceiling temperatures exceed 120°F

## CERTIFICATIONS, LISTINGS, APPROVALS

<b>Drop-out Installation</b>	Yes, approved for installation <u>beneath</u> fire suppression sprinklers
	IAPMO Uniform ES Listing Report 5021
	IAPMO Uniform ES Evaluation Report 0310
	FM Class 4651
	FM Certificate of Compliance



## PRODUCT DATA SHEET

Stratford White Ceiling Tiles

V1-STRATF-22WTO

---

	NFPA 13
	CertMark Evaluation Report CMI-ER31001
	UL File R4036
<b>Fire Ratings</b>	Class A
	Euroclass Rating B-s2-d0
	Flame Class V-0
<b>Code Compliance</b>	2015, 2012, 2009, and 2006 IBC
<b>Indoor Air Quality</b>	Greenguard Gold Certified; low-VOC; dust and fiber free
<b>Food Preparation</b>	FDA and USDA Compliant
<b>Moisture</b>	FEMA Class 4 Material; waterproof; washable
<b>Sustainability</b>	100% recyclable

## PERFORMANCE

<b>Noise Reduction</b>	NRC 0.25
	NRC 0.25 with perforations
	NRC 0.30 with AcoustoTherm
	NRC 0.40 with perforations and AcoustoTherm
	NRC 0.50 with Soniguard
	NRC 0.85 with perforations and Soniguard
<b>Sound Transmission</b>	STC 10
	STC 11 with AcoustoTherm
	STC 13 with Soniguard
<b>Ceiling Attenuation</b>	CAC 14
	CAC 20 with Soniguard
<b>Light Reflectance</b>	90.44%
<b>Thermal Insulation</b>	R-0.012
	R-0.80 with AcoustoTherm



## PRODUCT DATA SHEET

Stratford White Ceiling Tiles

V1-STRATF-22WTO

---

R-6.0 with Soniguard