



Contemporary European design constructed of premium 430 stainless steel. The range hood features dual motors to provide powerful suction with 500 CFM air flow. Winflo patented Quick-install hardware is included to make installation by one person a breeze. 2 bright energy saver LED lights push button or touch control panel controls 3 fan speeds and light. Easy to remove dishwasher-safe baffle filters keep maintenance to a minimum. The unit is convertible (ductless) with charcoal filters (part # WRHF004S2, sold separately).


Size	Push Button	Small Control	Large Control	Baffle Filter (replacement)	NON-DUCTED FILTERS
30in	LRU11C30	LRU11B30S	LRU11B30L	BFIL93713	WRHF004S2

Specifications

Description	30" 500 CFM Max Velocity Convertible Under Cabinet Range
Mount Type	Under Cabinet
Size	29.8" W x 18.11" D x 6.04" H
Duct Dimension	7" round or 10"x 3.25" rectangular
Product Weight	23.2 Lbs.
Exhaust Method	Convertible
Exhaust Location	Top or Rear
Power Source	Power Cord
Packaging Dim.	33" L X 9" W X 21" H
Voltage	120
Amperage	2.5 A
Residential Use	Yes
Commercial Use	No
Certification	ETL (compatible w/UL and CSA)
Filter	Baffle Filters (3pcs)
No. of Fan Speeds	3
Speed Control Type	Push Button or Touch Control
Max. Sound Level	65 dB
No. of Lights	2 LED
Bulb Wattage	2 W
CFM	500 (Max Velocity)
Compatible Ductless Filter	WRHF004S2
Installation Hdwe. Incl.	Yes (Easy Installation Hardware)

Warranty


3-Year Limited on parts

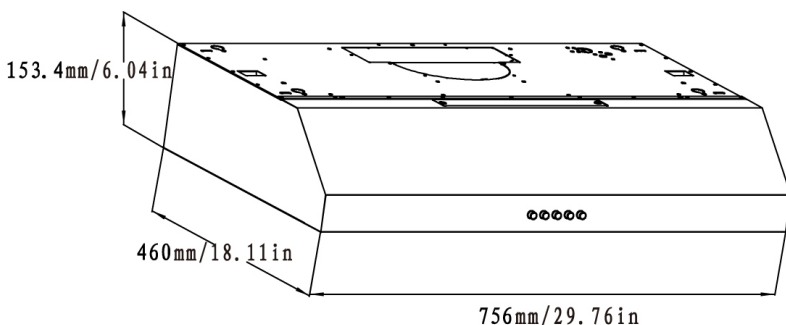

Scene Display



Plot of Static Pressure vs. Airflow

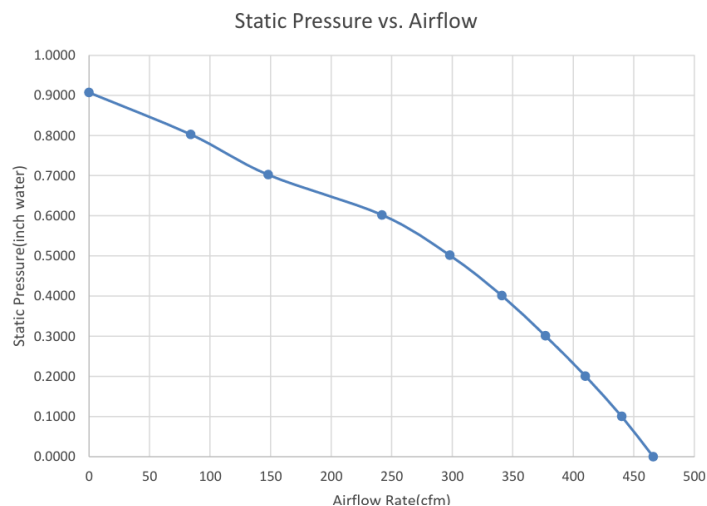

* Max velocity CFM of blower measure in open air environment*



TEL: 630-401-8050
E-Mail: support@winslyn.com

ADD: 1850 East Fabyan Parkway Batavia, IL 60510

Website: <https://www.winslyn.com>
Company: Winslyn Industries, LLC