

Two-light Bath

Wall mounted • Damp location listed



Description:

Fall in love with this innovative bath light. Classy, etched glass shades are aligned in a linear fashion. Each shade features a diffuser at its bottom constructed from glass. The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.

Specifications:

- Brushed Nickel (-009) (Plated)
- Steel Construction
- Etched Glass Sheet
- Classy, etched glass shades are aligned in a linear fashion.
- Each shade features a diffuser at its bottom constructed from glass.
- The shades are held in place by a sleek modern frame that is ready to help turn your home into the perfect environment for a relaxing staycation.
- Ideal for any bathroom.
- Perfect for transitional, modern, or contemporary settings.
- Measures 13-inch width by 5-inch height.
- Uses two LED bulbs that are included (10w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting Backplate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	2
Input Power	10w per module
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	per module
Lumens/LPW (Delivered)	1057/52 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Warranty	5-year limited warranty
Labels	cETLus Damp location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

P300290-009-30

Images:



Dimensions:

Width: Depth: 3-7/16"
Height: 5"
H/CTR: 2-1/2" (glass facing up)

Width: 5-5/16"
Height: 0-1/8"

Two-light Bath

Wall mounted • Damp location listed



Photometrics:

P300290-009-30

ELECTRICAL DATA P300290-009-30

Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	10
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to
Dimming	Yes*

*See Dimming Notes for more information

P300290-009-30


LED Light Engine: 3000 K 90 CRI

System Wattage: 10

Fixture delivered lumens: 983

Fixture Efficacy: 48.7

Spacing Criteria: 3.99 | 2.11 | 1.15

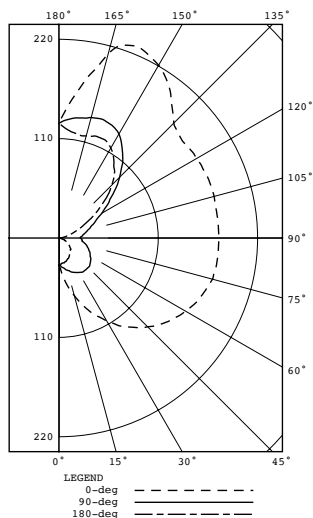

Test 19.01181 Test Date 06/25/19

CANDELA DISTRIBUTION

CANDELA	DISTRIBUTION					FLUX
	0.0	45.0	90.0	135.0	180.0	
0	30	30	30	30	30	
5	40	37	32	29	29	3
15	66	55	37	29	27	12
25	94	74	42	28	25	24
35	119	91	46	25	22	36
45	139	105	46	20	18	48
55	155	116	43	15	14	58
65	168	123	38	10	9	65
75	176	128	32	5	4	68
85	177	127	26	1	0	68
90	177	127	24	0	0	
95	177	127	26	3	3	69
105	178	128	33	12	11	72
115	177	129	45	27	26	76
125	175	131	67	50	52	82
135	180	145	95	76	83	87
145	210	174	122	100	106	87
155	227	194	138	112	120	71
165	211	183	138	116	117	43
175	152	145	132	122	120	13
180	127	127	127	127	127	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	39	4.0
0-40	75	7.6
0-60	182	18.5
0-90	383	39.0
90-120	218	22.2
90-130	300	30.5
90-150	473	48.2
90-180	600	61.0
0-180	983	100.0

Two-light Bath

Wall mounted • Damp location listed



P300290-009-30

Dimming Notes:

P300290 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Leviton 6672

Leviton 6674

Lutron NTEVL-300

Lutron DVELV-300P

Lutron DVCL-253P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.