



New UF-2500EH-X PRO-SERIES 'FRAME ENGAGING' UTILITY & ALL-TERRAIN VEHICLE LIFT

ABLE TO SERVICE THE LARGEST UTVS WITH 2,500 LBS. CAPACITY!

- ❖ **INNOVATIVE 'FRAME ENGAGING' LIFT DESIGN, ALLOWING FOR WHEEL & SUSPENSION SERVICE FOR THE LARGEST UTILITY & ALL-TERRIAN POWER SPORT VEHICLES.**
- ❖ **LOAD BEARING 'FLIP-UP' PLATFORM EXTENSIONS FOR THE LARGEST UTVs**
- ❖ **SMALL LIFT FOOTPRINT PROVIDES ADDITIONAL WORKSPACE FOR A SAFE & CLEAN WORK AREA.**
- ❖ **PORTABLE OR FIXED PEDESTAL CONTROL STAND**
- ❖ **FULLY OPERATIONAL CONTROL PANEL WITH ELECTRO-MAGNETIC LOCK RELEASE.**
- ❖ **HEAVY DUTY DIAMOND PLATE PLATFORM & EXTENSIONS.**
- ❖ **SMOOTH & QUIET 110V ELECTRIC / HYDRAULIC OPERATION - NO AIR COMPRESSOR REQUIRED.**
- ❖ **HIGH QUALITY CONSTRUCTION WITH DURABLE POWDER-COAT FINISH.**

NEW


**UF-2500EH-X (2,500 LBS. CAPACITY)
 ELECTRIC / HYDRAULIC UTV FRAME LIFT**

- 24" X 88.9" PLATFORM SIZE
- 43" RISE HEIGHT
- 4.75" MIN. HEIGHT
- LOAD BEARING HINGED PLATFORM EXTENSIONS
- PORTABLE OR MOUNTED PEDESTAL CONTROLS
- 110V INTEGRATED ELECTRIC / HYDRAULIC POWER UNIT
- MAGNETIC LOCK RELEASE
- THREE LOCKING POSITIONS
- RUBBER CONTACT LIFT PADS - 4.75" X 6.5" (4EA)



Premium Products at Affordable Prices!!

UF-2500EH-X PRO-SERIES Difference!!

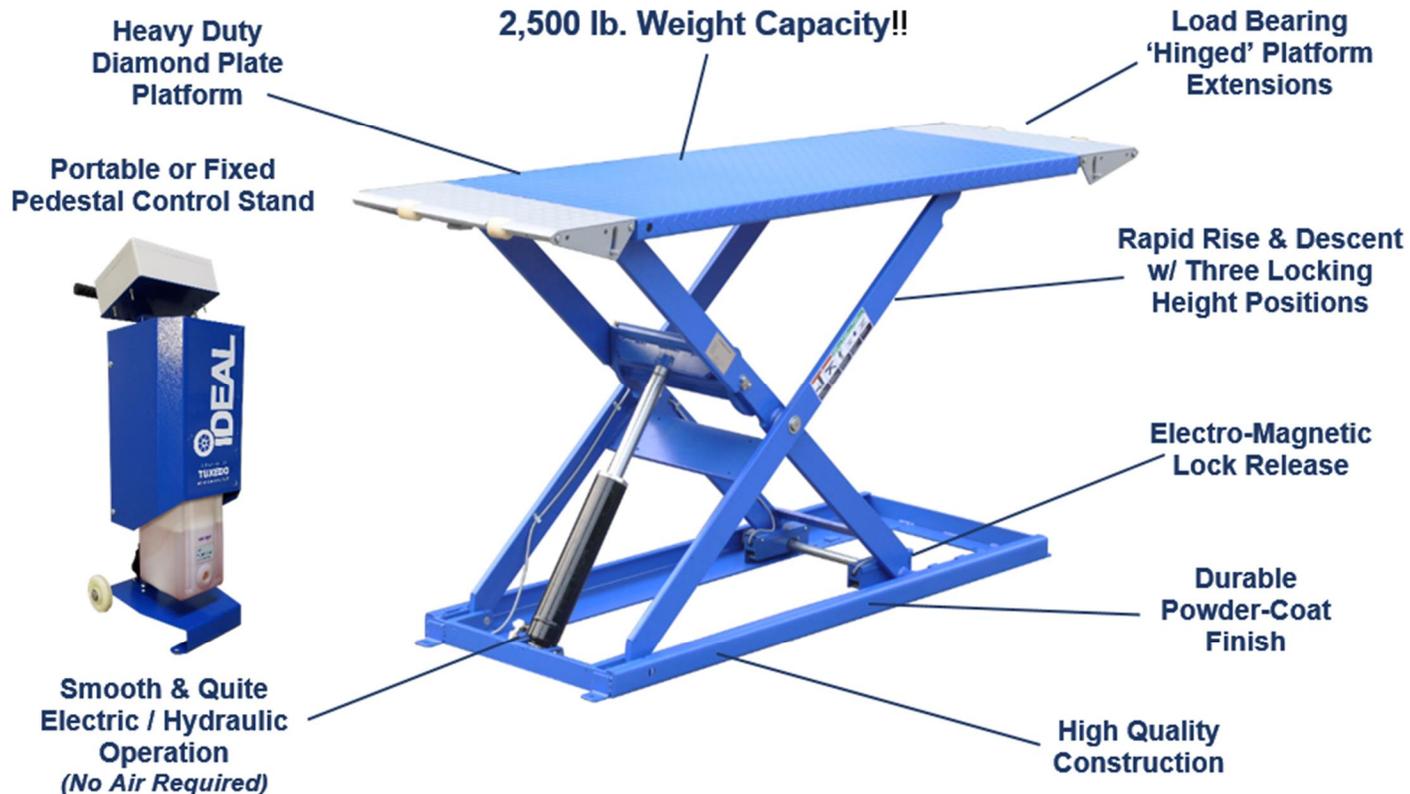

Fully Operational Control Panel




Pedestal Stand Anchoring Option



Power Unit Cover & Storage Bin



Rubber Contact Lift Pads Included



Hinged Platform Extensions for Larger UTVs

UF-2200EH-X PRO-SERIES Specs

Capacity	2,500 lbs.
Min. Height	4.75"
Max Lifting Heights	43" to 49.25" w/ Adaptor
Locking Heights	28" - 36.5" - 42"
Overall Length w/ Ramps	67" to 89"
Overall Width	24.8"
Platform Size (L x W)	67" x 24"
Pedestal Control Stand Size	15"L x 11"W x 39"H
Pedestal / Platform Max Distance	96"
Lifting Time	25 S
Lowering Time	25 S
Power	110V, 60Hz, 1 PH-18A
Ship Weight	740 lbs.

