

CLEAR HIGH GLOSS FINISH

DRYLOK[®]

WETLOOK

WALK & DRIVEWAY SEALER

ENHANCES AND PROTECTS CONCRETE & MASONRY

LATEX
FILM-FORMING
SEALER



PATIOS &
PORCHES



GARAGE
FLOORS



WALKS &
DRIVEWAYS

HORIZONTAL
& VERTICAL
APPLICATIONS

GLOSSY FINISH
ENHANCES DEPTH
AND VIBRANCY
OF TEXTURE



BEFORE


AFTER



STONE



CONCRETE

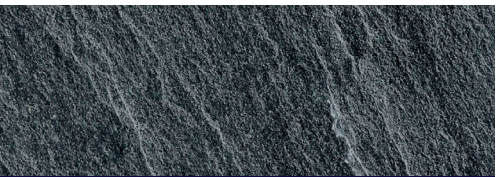

SLATE



- PREVENTS UNSIGHTLY STAINS FROM NATURAL SALTS & MINERALS
- Durable, non-yellowing finish
- Resists weather, salt, and chemicals

VOC: 89 g/L



MADE IN USA

5 GAL. (18.9 L)



0 79941 28915 7

R6217

DRYLOK® WETLOOK

DRYLOK® WetLook is a clear, water base acrylic coating formulated for use on interior or exterior, vertical and horizontal concrete and masonry surfaces. DRYLOK's unique SaltLok® Technology penetrates into the surface providing superior resistance to unsightly efflorescence staining often visible on brick, block and poured concrete surfaces. It repels water and protects from oil, gasoline, grease, salts, acids, household chemicals and staining. Ideal for concrete and masonry including pavers, natural brick, and stone. Built in flash rust resistance helps to avoid staining on substrates that contain natural metals. Excellent chemical resistance to de-icing salts. Compatible with polymeric sand. Can be applied over painted concrete and masonry surfaces.

SURFACE PREPARATION: Masonry surface must be dry and free of dirt, wax, dust, mildew, and loose or scaling material. For proper penetration and adhesion to extremely smooth bare concrete floors, use DRYLOK® Etch or muriatic acid, according to manufacturer's directions. Rinse thoroughly (pressure wash for best results). Allow to dry thoroughly. For previously painted masonry surfaces test DRYLOK® WetLook on a small area to determine compatibility prior to completing the entire job.

WARNING! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

APPLICATION: DRYLOK® WetLook appears milky in the can – dries clear. Stir thoroughly. Use when surface is thoroughly dry. Do not apply in direct sunlight. Do not apply if rain, heavy dew, or temperature below 50 F (10 C) are expected within 24 hours before or after application.

Apply by brush, roller, sprayer. Roller: 1/4"-3/8" (6-8 mm) nap roller; brush: nylon/polyester; pump sprayer. Spread rate is dependent on surface porosity, 1-2 coats will achieve a desirable high gloss appearance. On exposed aggregate and on materials where product may puddle or pool, over application will extend drying times and surface may appear milky until fully dry.

THINNING: When applied over flagstone, slate, terrazzo, dense smooth or light colored concrete, thin with clean, moderately warm water 10%-20% to minimize sheen variations as subsequent top coats are applied. Test on a small area to see final effect.

IMPORTANT: Sealed surfaces can become slippery when wet. Use caution when walking on surface when moisture is present. Up to 2 oz. of DRYLOK® Non-Skid Texture Additive may be added to DRYLOK® WetLook to improve traction.

MAINTENANCE: Horizontal surfaces subject to excessive wear may require periodic touch-ups to high traffic areas.

COVERAGE: 200-400 sq. ft. (19-37 m²) per gallon depending on surface porosity and desired gloss level.

CLEAN UP: Soap and water.

DRY TIME: Dries to touch in 1 hour. May recoat in 2 hours. Longer dry time required in cool temperatures, in high humidity conditions, and over aggregate surfaces. Floors may be subjected to light foot traffic after 24 hours. Allow 72-96 hours before subjecting surface to heavy foot, repositioning furniture or automotive traffic. Wait at least 30 days before cleaning with a mild, nonabrasive liquid detergent.

CAUTION: Do not take internally. Avoid prolonged contact with skin or breathing of spray mist. Close container after each use. If spilled, contain spilled material, and remove with inert absorbent. Dispose of contaminated absorbent, container, and unused contents in accordance with local, state, and federal guidelines.

FIRST AID: In case of eye contact, immediately flush eyes with plenty of water for at least 15 minutes. Call poison control center, hospital emergency room, or physician immediately. If swallowed, do not induce vomiting. Call poison control center, hospital emergency room, or physician immediately.

KEEP FROM FREEZING!

KEEP OUT OF REACH OF CHILDREN.

USE ADEQUATE VENTILATION.

DO NOT TAKE INTERNALLY.



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

UNITED GILSONITE LABORATORIES, 1396 Jefferson Ave., Dunmore, PA 18509

Order No. 28915

UFI : 350A-EAFF-E80H-DG8H

R6217

LR923

www.DRYLOK.com



A SIKA COMPANY