# FAYMART®





- Inspect the wire insulation for any cuts, abrasions or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



















If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

\* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

### HARDWARE INCLUDED







Decorative












**Rubber Rings** 


**Mounting Screws** 

Wire Nuts

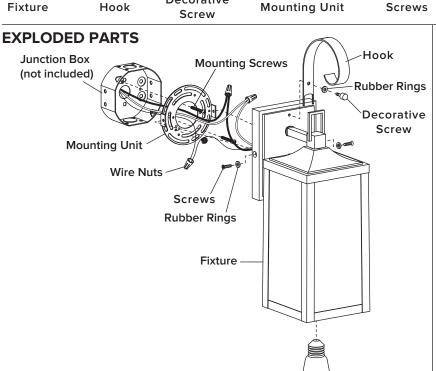

# INSTALLATION STEP 1


Unscrew the **rubber rings** and **screws** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box(not included).

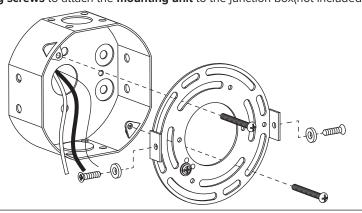

Bulb — (not included)

## STEP 2

Use the **dorative screws** and **rubber ring** to attach the **hook** to the **fixture.** 

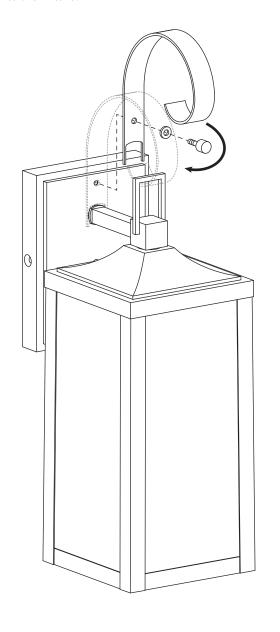

### STEP 3

Make the electrical connection from the junction box (not included) to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Next, connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape. Black or Red wire Black wire from (live wire) the fixture from the junction box White wire White wire from (neutral wire) the fixture from the junction box Bare or Green ground wire Ground wire from from the junction box the Fixture Green Ground Screw \*Sealing tape (not included)

## STEP 4

Attach the fixture to the mounting unit through screw holes as shown, and secure it with rubber rings and screws.

NOTICE: Please use caulk in the back plate and wall mounting surface to prevent water from entering.

