




40" Plow Blade

For use on Yardmax Power Wheelbarrow YD4103

| | |
|---------|----------|
| Model # | YDB403 |
| Length | 40" |
| Height | 20" |
| Weight | 68.3 lbs |

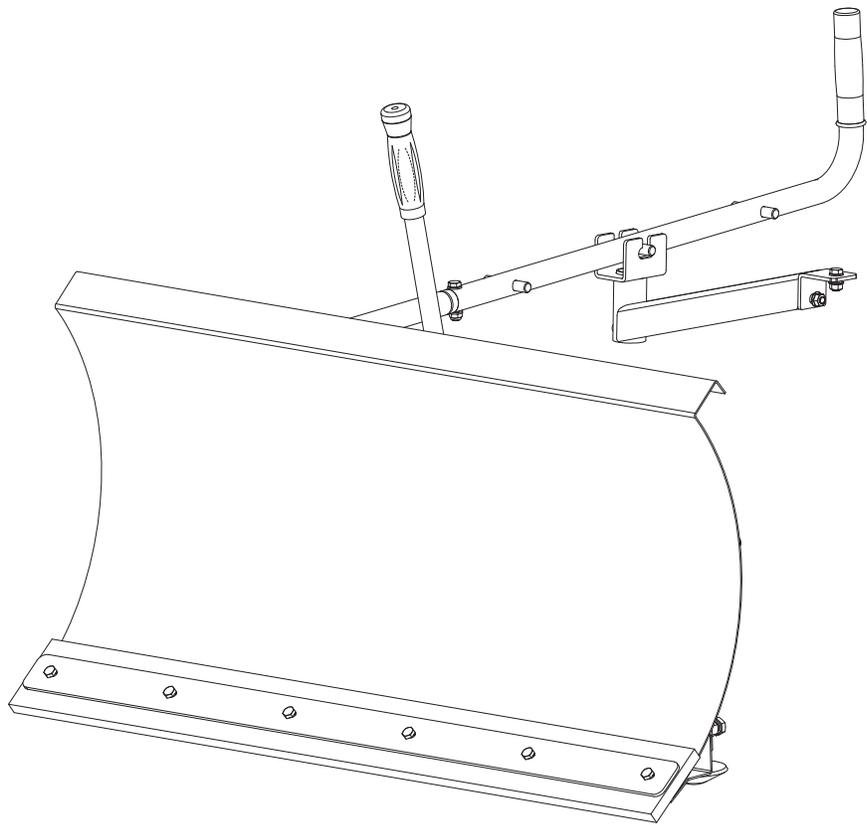

SUPPORT

Have questions about your YARDMAX equipment?
Call us at 844-YARDMAX, email us at
support@yardmax.com, or contact us via your
favorite social media site.

ASSEMBLY

To assemble the plow blade follow the below instructions.

PLOW BLADE

1. Install the two supporting feet to the blade as shown in Fig. 1a, adjust the height and secure them with M12X30 bolts and nuts. Mount the steering bracket to the blade with M8X30 bolts, washers and nuts. (See **Figure 1a**)

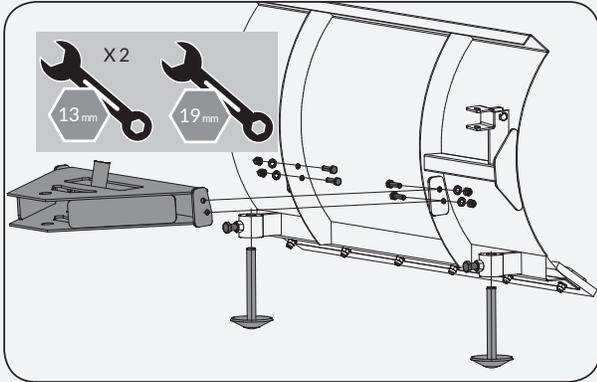


Figure 1a

| | | | |
|--|----------|-----|----------|
| | M8 X 30 | X 4 | 4 |
| | M12 X 30 | X 2 | |

2. Mount the bracket for the angle control lever to the frame with M8X20 bolts, washers and nuts. (See **Figure 1b**)
3. Mount the flange bracket with M12X30 bolts, washers and nuts. (See **Figure 1b**)

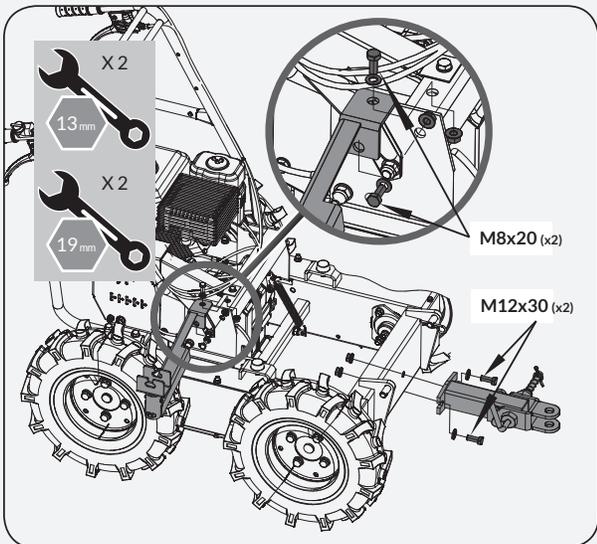


Figure 1b

| | | | |
|--|----------|-----|----------|
| | M8 X 20 | X 2 | 5 |
| | M12 X 30 | X 2 | |

4. Fix the blade assembly to the flange bracket with M20X100 bolt, washer and nut. Do not overtighten, allowing the blade to rotate freely in both directions. (See **Figure 1c**)

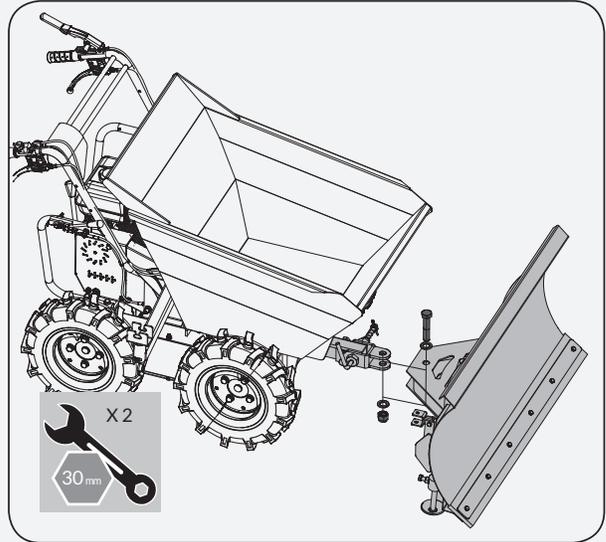


Figure 1c

| | | | |
|--|-----------|-----|----------|
| | M20 X 100 | X 1 | 6 |
|--|-----------|-----|----------|

5. Connect the angle control lever and extension by M8X40 bolt, washer and nut. Attach the extension to the blade with M8X50 bolt and nut. Lock the second pin of the angle control lever into the limit slot of the bracket. (See **Figure 1d**)


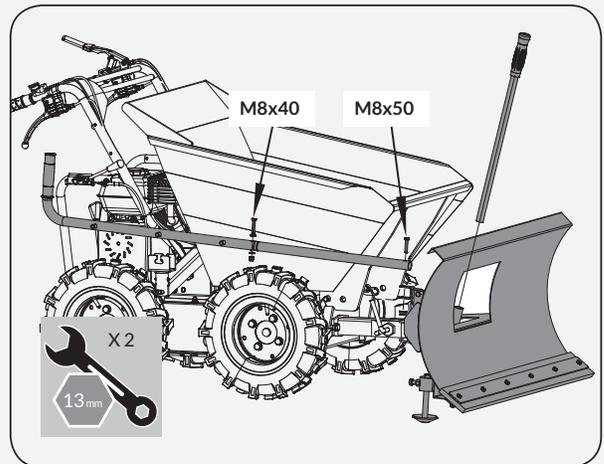


Figure 1d

| | | | |
|--|---------|-----|----------|
| | M8 X 40 | X 1 | 7 |
| | M8 X 50 | X 1 | |

PARTS DIAGRAM

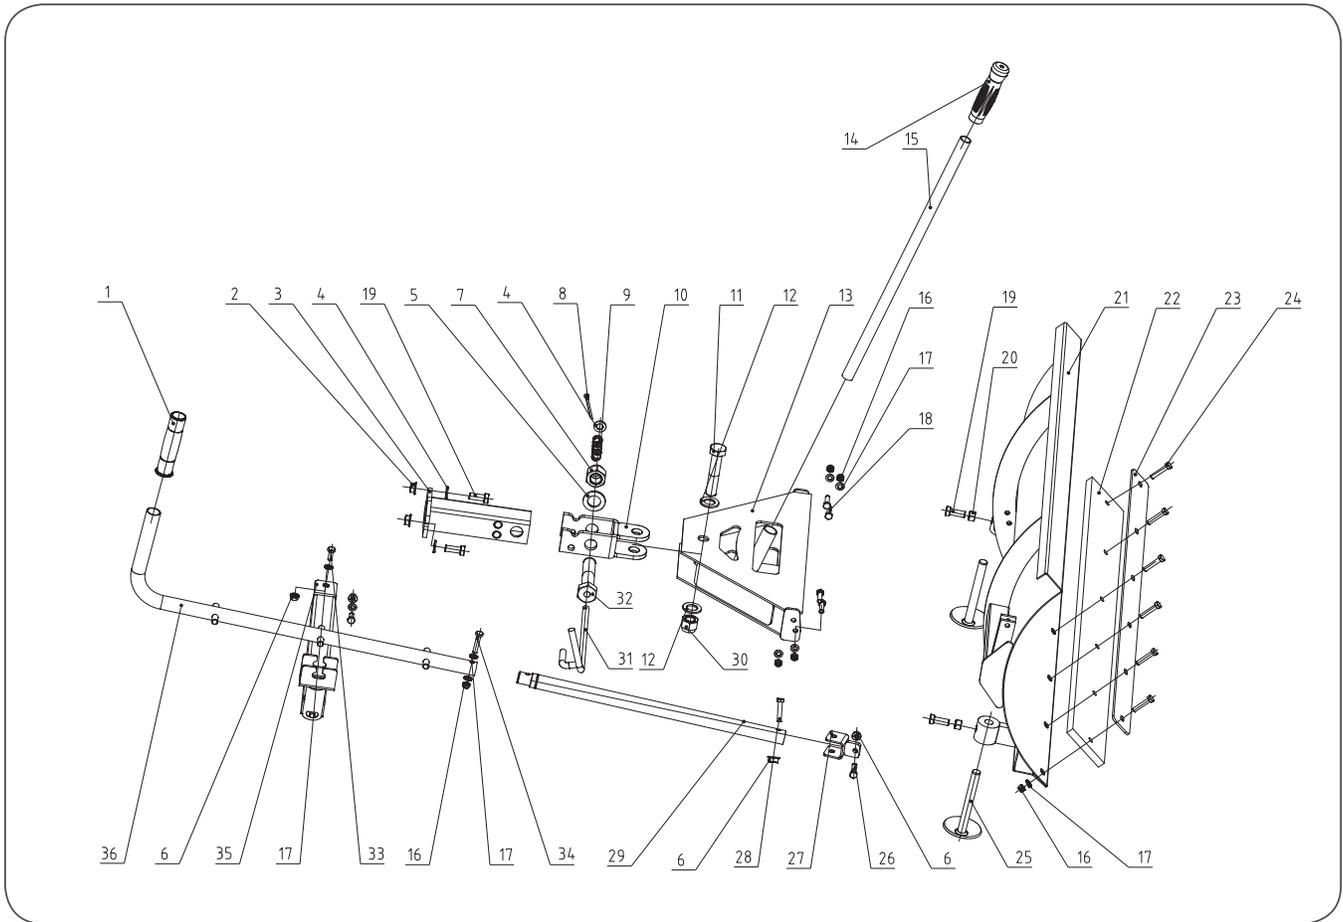

PARTS LIST

| No. | Description | Qty | No. | Description | Qty | No. | Description | Qty |
|-----|----------------------|-----|-----|----------------------|-----|-----|----------------------|-----|
| 1 | Handle Sleeve 1 | 1 | 13 | Connecting Bracket 3 | 1 | 25 | Base | 2 |
| 2 | Nut M12 | 2 | 14 | Handle Sleeve 2 | 1 | 26 | Bolt M8x35 | 1 |
| 3 | Connecting Bracket 1 | 1 | 15 | Handle Grip 2 | 1 | 27 | Connecting Bracket 4 | 1 |
| 4 | Washer12 | 2 | 16 | Lock Nut M8 | 11 | 28 | Bolt M8x50 | 1 |
| 5 | Washer24 | 1 | 17 | Washer8 | 14 | 29 | Connecting Pipe | 1 |
| 6 | Nut M8 | 4 | 18 | Bolt M8x30 | 4 | 30 | Lock Nut M20 | 1 |
| 7 | Lock Nut M24 | 1 | 19 | Bolt M12x30 | 4 | 31 | Limiter | 1 |
| 8 | Pin 4x40 | 1 | 20 | Nut M12 | 2 | 32 | Bolt M24x110 | 1 |
| 9 | Spring | 1 | 21 | Blade Weldment | 1 | 33 | Bolt M8x20 | 2 |
| 10 | Connecting Bracket 2 | 1 | 22 | Blade Plate | 1 | 34 | Bolt M8x40 | 1 |
| 11 | Bolt M20x95 | 1 | 23 | Shave Plate | 1 | 35 | Connecting Bracket 5 | 1 |
| 12 | Washer20 | 2 | 24 | Bolt M8x40 | 6 | 36 | Handle Grip 1 | 1 |

Tame the Great Outdoors®

