

NOTE

1. PRESS THE ON/OFF BUTTON CONTINUOUSLY TO CHANGE THE COLOR TEMPERATURE . TURN BACK ON THE LIGHT MORE THAN 7 SECONDS AFTER TURN OFF THE LIGHT , THE COLOR TEMPERATURE WILL BE THE SAME AS LAST TIME.
2. IF THE REMOTE CONTROL CANNOT BE USED NORMALLY, PLEASE PRESS AND HOLD THE MIDDLE AND LOW BUTTONS AT THE SAME TIME WITHIN 5 SECONDS AFTER THE PRODUCT IS POWERED ON, UNTIL YOU HEAR TWO BEEPS TO SUCCEED.IF IT DOESNT WORK. PLEASE TRY AGAIN.



CEILING FAN INSTALLATION



① Motor



② Hanging Bracket



③ Up Canopy



④ Blades



⑤ Down Rod



⑥ Down Canopy



⑦ Light source




⑧ Light cover



⑨ Hardware fitting



⑩ Remote Control

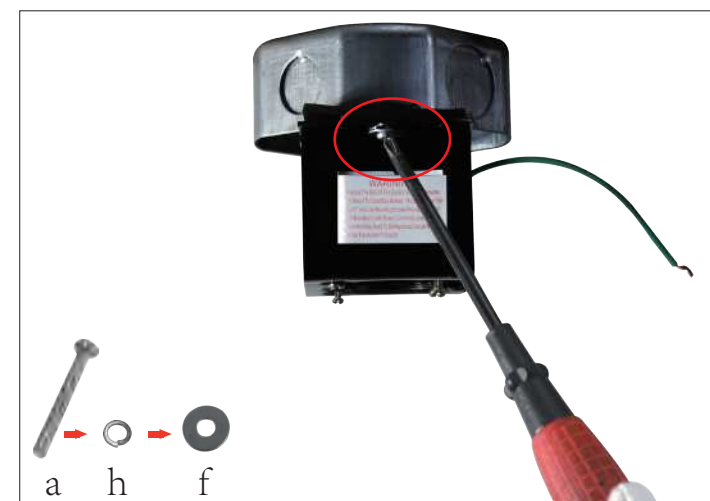

Step 1 For concrete ceiling, install the mounting plate to octagon box with two machine screws.

or



Step 1 For wooden ceiling, install the mounting plate to wooden ceiling with two wood screws.



Step 2
Remove the 3 fixing screws for the light kit.



Step 3
Loosen the 2 screws of the coupler.



Step 4
Pull out the R-pin from the rod.



Step 5
Put the wires and the two canopies through the downrod



Step 6
Tighten the 2 screws of the coupler.



Step 7
Cover the coupler with down canopy.



Step 12
Rotate the up canopy and tighten the screws.



Step 13
Install the blades, tighten the screws.




Step 8
Loosen the two opposite screws



Step 9
Hang the fan on the hanging bracket and align the slot on the downrod with the bulge on the hanging bracket.



Step 14
Fix the light kit with the screws.

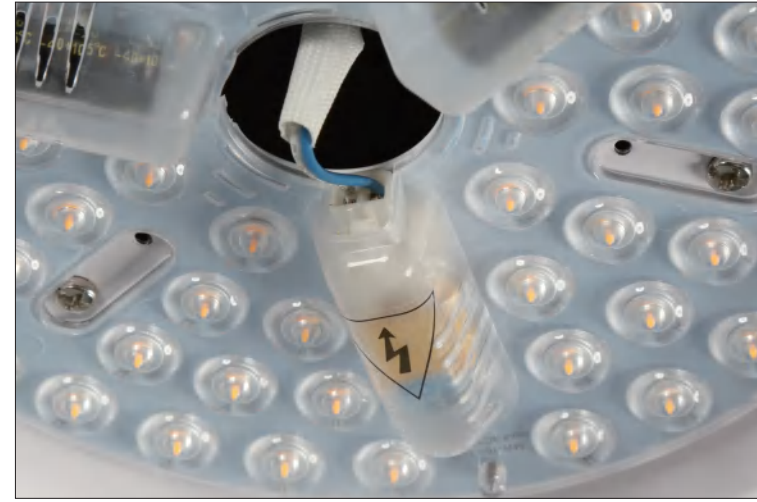

Step 15
Connect the light kit power cord to the light kit receiver.



Step 10
Connect the same color wires of the fan and receiver.



Step 11
Connect the receiver to home wires. Black for Live wire, White for neutral wire, Green for ground wire.



Step 16
Rotate the light cover until fixed.