



**DAYLIGHT**  
**5000K**  
KELVIN

CRI  
**90+**  
TRUECOLOR

**LED**  
LENS

**DAMP**  
RATED

**IC**  
RATED

**110°**  
BEAM  
ANGLE



**1100**  
LUMENS

**15W**  
=100W POWER

**120 VOLT**

**DIMMABLE**  
100-10%

**DIE-CAST**  
ALUMINUM

**INDOOR &  
OUTDOOR**

**CERTIFICATIONS**



## SPECIFICATIONS

### 5/6 INCH LED | 50K

#### THIN DISK LIGHT | WHITE ROUND | RETROFIT OR SURFACE MOUNT

NW-R-DSK-6-15W-50K

The NUWATT thin led disk can be directly wired to a 4"/6" junction box which means they do not need a can. Directly install to the ceiling for instant bright light in your laundry room, kitchen, bedrooms, bathrooms, offices and more!

#### TECHNICAL SPECS


|                       |                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------|
| VOLTAGE               | AC 120V                                                                                                            |
| WATTAGE               | 15W                                                                                                                |
| POWER FACTOR          | >0.9                                                                                                               |
| LUMENS                | 1100                                                                                                               |
| CRI                   | 90                                                                                                                 |
| EQUIVALENCY           | 75/100W                                                                                                            |
| DIMMABLE              | TRIAC DIMMING                                                                                                      |
| BEAM ANGLE            | 110°                                                                                                               |
| EFFICACY (LM/W)       | 67                                                                                                                 |
| COLOR TEMPERATURE     | 5000K <br>(-4°F~104°F) -20~40°C |
| OPERATING TEMPERATURE | IP54                                                                                                               |
| IP RATING             | DAMP LOCATION                                                                                                      |
| MOISTURE RATING       |                                                                                                                    |

#### LIFETIME PERFORMANCE


|                |                 |
|----------------|-----------------|
| WARRANTY       | 5 YEAR WARRANTY |
| LIFETIME HOURS | 50,000 HOURS    |

#### CONSTRUCTION

|                    |                               |
|--------------------|-------------------------------|
| HOUSING MATERIAL   | ALUMINUM                      |
| TRIM MATERIAL      | DIE-CAST ALUMINUM             |
| PRODUCT WEIGHT     | 0.12 KG                       |
| PRODUCT DIMENSIONS | 7.37 IN. X 7.37 IN. X 1.3 IN. |
| LENS DIAMETER      | Ø4.41 IN.                     |
| LENS MATERIAL      | NON-YELLOWING ACRYLIC         |



DURABLE  
**BUTTERFLY**  
CLIPS



E26  
**RETROFIT**  
PLUG

## TECHNICAL

5/6 INCH LED | 50K | THIN DISK LIGHT | WHITE ROUND | RETROFIT OR SURFACE MOUNT

NW-R-DSK-6-15W-50K



**HEIGHT**

13 IN

33 MM

**EXTERIOR DIAMETER**

Ø7.4 IN • Ø188 MM



**E26  
PLUG**





**LENS DIAMETER**

Ø4.4 IN • Ø112 MM

**110°**

AVERAGE  
BEAM ANGLE

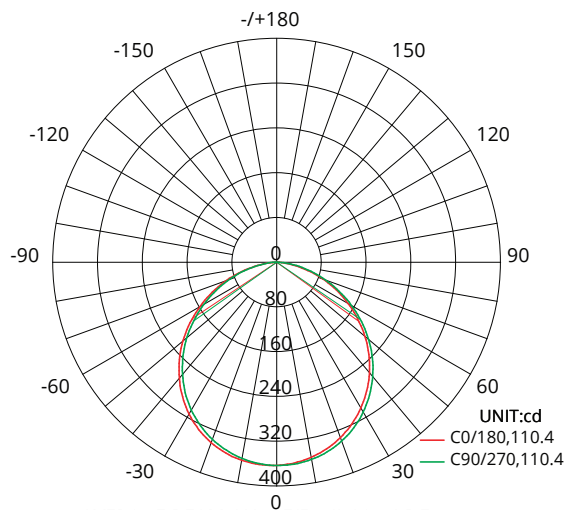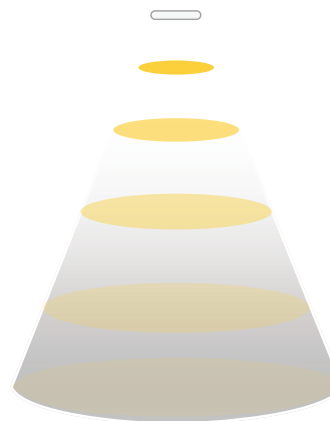

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

**1100 LUMENS**

## IN STORE DISPLAY




GIFT BOX




6 PACK BOX



12 PACK BOX



END CAP



PALLET