



INSTALLATION INSTRUCTIONS


NO.6068

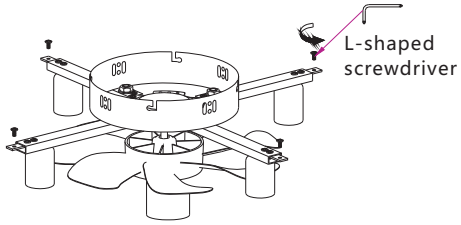


7. Unscrew the M4 screw on top of square lamp tube.

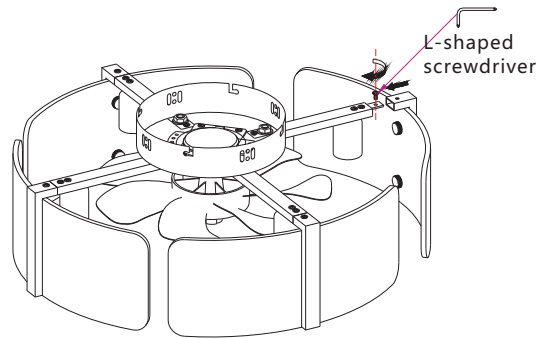


8. Insert L-shaped tube into square lamp tube, level and fix with M46 screws.




9. Fix mounting bracket onto ceiling with dedicated screws.

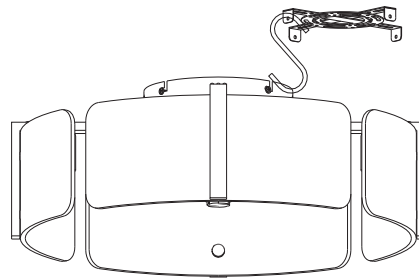



10. Hang lamp body with S-hook.

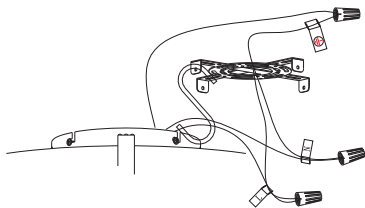

11. Cut off power supply; connect controller black wire(L) to live wire, white wire(N) to neutral wire and fixture ground wire to household ground wire as shown.

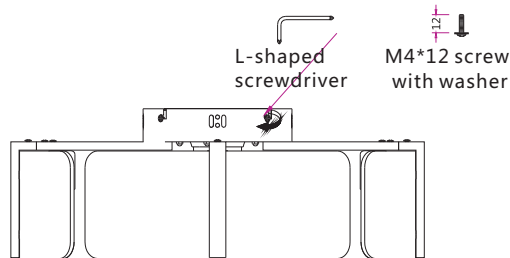

12. Align side holes, push fixture flush against ceiling, rotate body to lock screws into bracket slots and tighten with M4*12 washer screws. Installation finished.

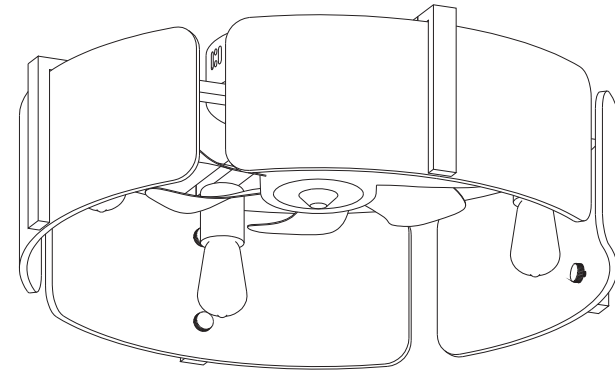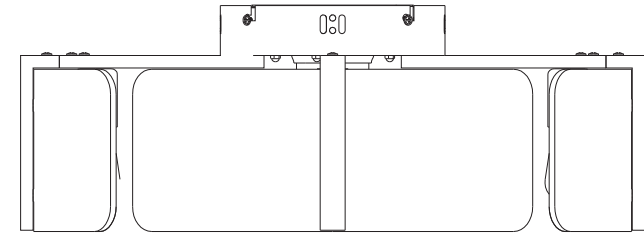

Please scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.



Please scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.





Installation Steps


Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates only within 110V-265V.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

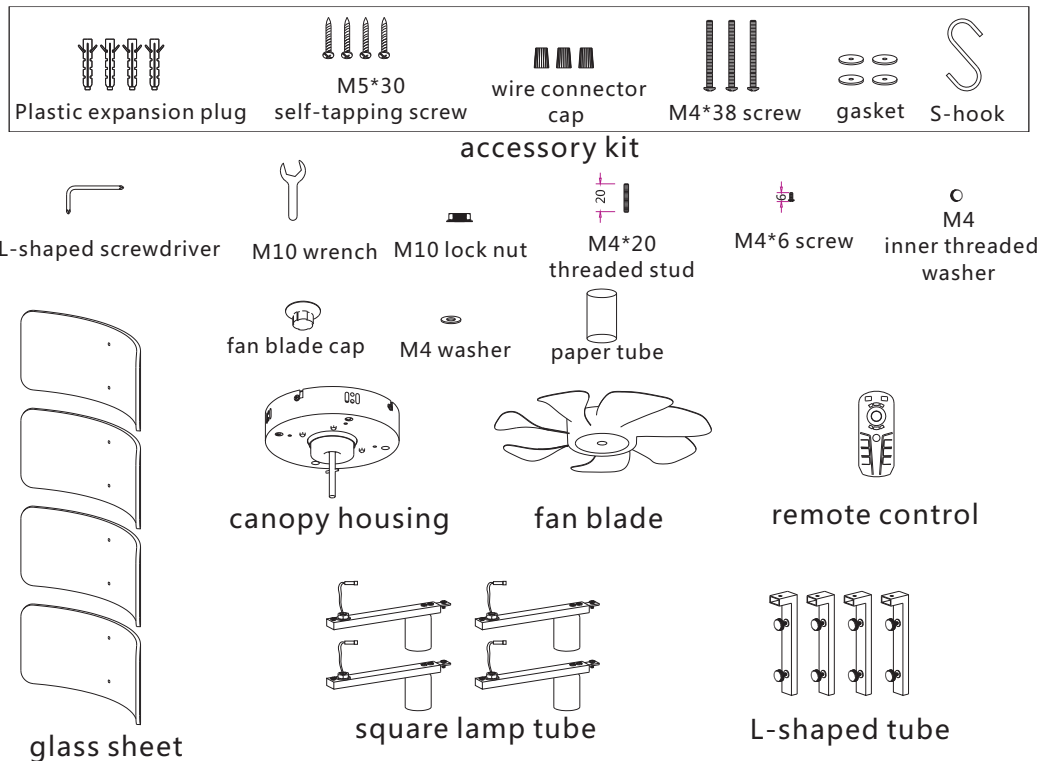


1. Separate the canopy housing from the mounting bracket.

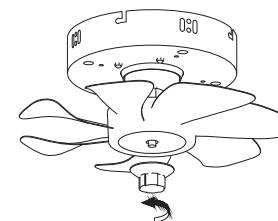


2. Install fan blades and tighten blade caps counterclockwise.

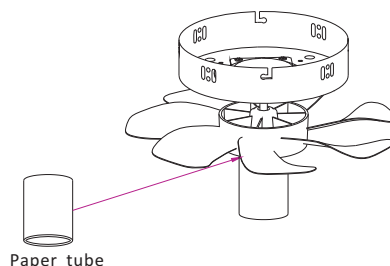


3. Place the paper tube under the fan base as a cushion.

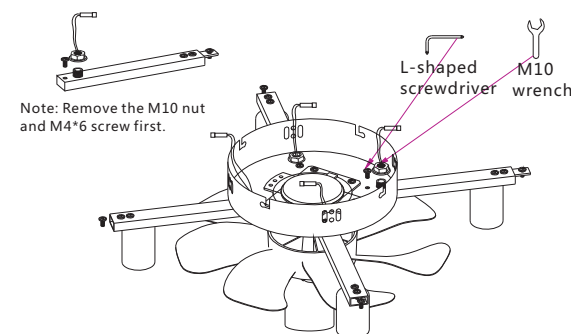

4. Align the square lamp tube with holes of canopy housing, level it up and fasten with M4*6 screws & M10 lock nuts using L-shaped screwdriver and M10 wrench.

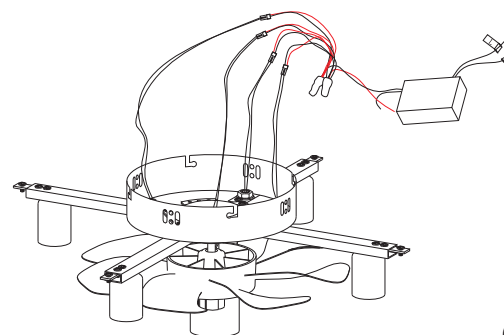

5. Connect the controller and lighting wires.

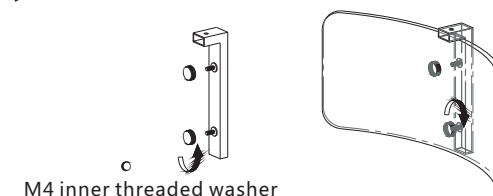

6. Remove M4 inner threaded washer from L-shaped tube, align glass hole with threaded rod of L-tube and fasten with M4 inner washer. (Note: Do not over-tighten to avoid glass cracking.)