



TriStar II

Weight = 37.4 lbs.

MODEL #3JUD18-3M



REQUIREMENTS

MECHANICAL:

Fan must be attached to a securely anchored electrical junction box that is rated for ceiling fans.

ELECTRICAL:

Requires a grounded electrical supply line of 120 volts, 60Hz, 1 amp circuit.

FEATURES

MOTOR SPECS:

50 X 25 X 3

LOCATION USE:

This fan is rated for Damp locations and is E.T.L. listed. Model: 3JUD18-3M.

WARRANTY:

5 Year Outdoor/15-Year Indoor Limited Indoor Warranty

OPTIONS

AVAILABLE FINISHES:

Brushed Nickel BN-1	88551
---------------------	-------

BLADES:

Match Fan Finish with 3 x18" Blade Sweep.

CONTROL:

INCLUDES Hand Held remote control with a receiver.

LIGHTING:

An optional light fixture, #620 15W LED, is available.

DOWNROD:


The fan comes with a nom. 1/2" diameter x 6" long down-rod. Optional down-rods are available in 12", 18", 24", 36", and 72" lengths. A down-rod coupler is available for installations requiring a down-rod longer than 72". Fan can be mounted on a sloped ceiling up to 35°.

PERFORMANCE

AIRFLOW/ENERGY EFFICIENCY INFO

Fan Speed	RPM	CFM/ Watt	WATT	CFM
High	584	40.3	129.6	5218
Med	353	56	57.2	3205
Low	308	42.2	45	1900

Dimensions:

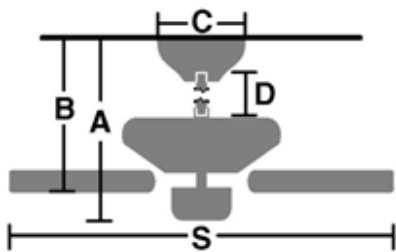

<u>C</u> anopy Diameter	<u>S</u> weep Diameter
6"	18"x 3

<u>D</u> ownrod Length	<u>B</u> lade Depth	<u>A</u> ll Depth
6" OEM	20"	20"
12"	26"	26"
24"	38"	38"
36"	50"	50"
48"	62"	62"
72"	86"	86"