

Lamp installation manual

Please keep for reference

Respect of customer,thank you for your purchase this product,please read the instructions carefully before using.



- 1.Please in strict accordance with the instructions for installation
- 2.Please do not optional exchange lamps parts

Note:

- ◇ Must cut off the power supply first,ensure the safety, according to the company to provide installation method in the operations.
- ◇ Do not install in high temperature or moisture place,use power do not exceed the specified range(rated voltage AC110v),lest cause damage to the lamps.
- ◇ Install lamp body,please wear gloves.Avoid injuries and damage the light body surface.
- ◇ To ensure safety,maintenance and check lamps,please entrust electrical professionals responsible for construction work.
- ◇ Please do not touch the random use of lamps and lanterns,happen abnormal phenomena, please quickly cut off the power supply,and with vendors contact.

Surface Dent Repair Instructions

【Dent Explanation】

The surface material of silk lamps is special. External pressure may cause dents. If you find dents after receiving the product due to transportation or installation, please do not worry. These dents are repairable and are not quality issues. Please do not request a return or exchange for this reason.

【Dent Repair Method】

- 1. Use a household hair dryer on the hot air setting.
- 2. Hold the nozzle at a distance where the air feels slightly warm to the touch (approximately 20 cm / 8 inches).
- 3. Keep this distance and blow hot air directly onto the dent for 2 seconds only.(Do not heat for too long, as this may melt the surface.)
- 4. After blowing for 2 seconds, wait about 10 seconds. The dent will automatically shrink and smooth out.
- 5. If the effect is not ideal, you may repeat the process 2-3 times.

Please note: This is not a product quality issue.

Installation Instructions:

Please complete the assembly in sequence:




①③②

①Use bolts to fix the hanging plate to the ceiling.

③Adjust the length of the power cord and insert the power cord of the lamp into the terminal①.

②Install the ceiling panel onto the hanging board and tighten the screws.

Finally, screw the light source into the lamp holder.

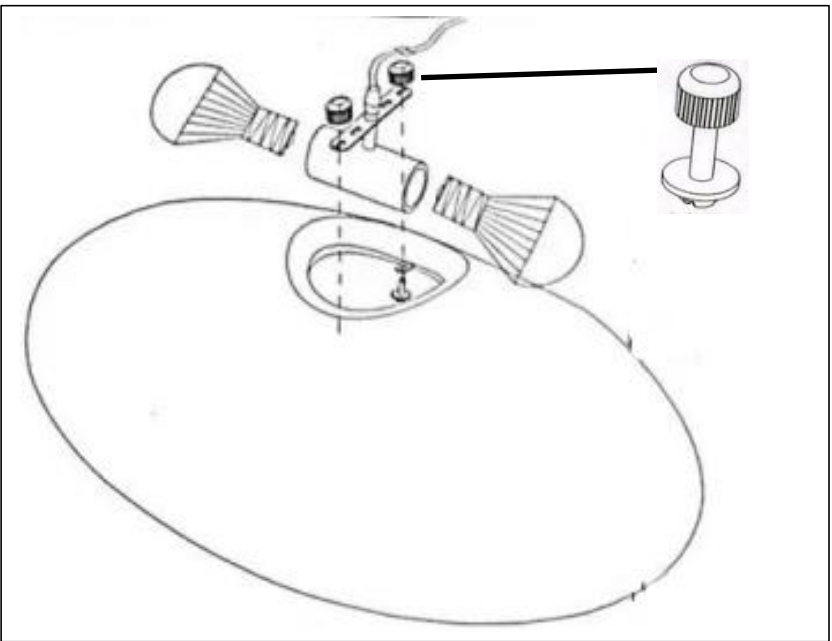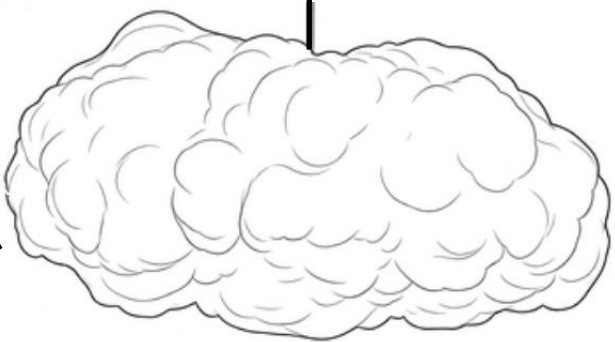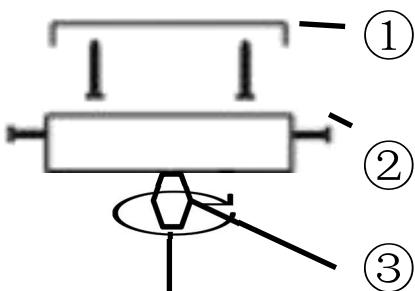

- 1. Locate the hardware package.
- 2. Follow the diagram on the left to assemble the lampshade and lamp holder using the screws, washers, and nuts.
- 3. Then screw the bulb clockwise into the lamp socket.