Installation Manual FLORA BI-FOLD SHOWER TUB DOOR


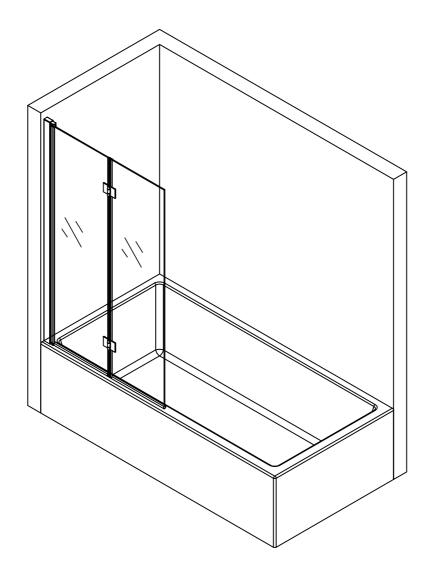





TABLE OF CONTENT


PACKAGE CONTENTS3-4
TOOLS REQUIRED &SAFETY INFORMATION5
LEVEL & PLUMB CONDITIONS6
LEFT OR RIGHT BATHSCREEN INSTALLATION7
WALL JAMB INSTALLATION8
WALL PANEL INSTALLATION9
HINGE INSTALLATION10
SEAL INSTALLATION
SEALING12
WARRANTY TERMS13

PACKAGE CONTENTS

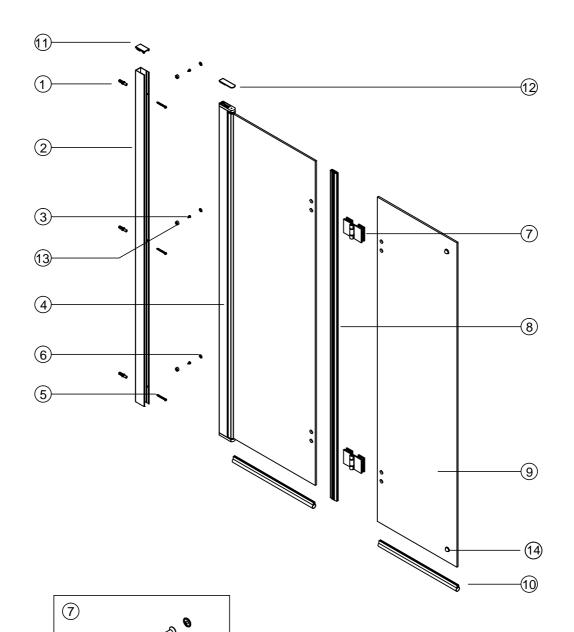



PACKAGE CONTENTS






































TOOLS REQUIRED

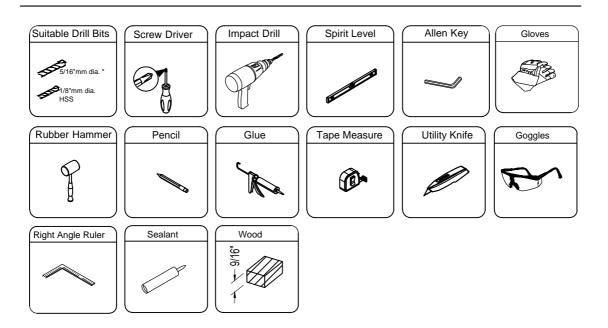

SAFETY INFORMATION

SAFETY INFORMATION

- *Please read the entire installation manual before attempting to assemble, operate or install the product of shower door and/or bathtub-door.
- *Handle the tempered glass with caution! Improperly handling the glass may cause it to break suddenly in small pieces.
- *Do NOT put glass panels on hard or sharp surfaces, always work on clean and soft surface (e.g. soft towel). Shattering may occur otherwise.
- *Stress Fracture may occur any time naturally on any tempered glass, and all tempered glass supplied by manufacturer is SGCC certified. This type of glass broken or stress fracture is excluded from the warranty terms.

CAUTION


- *Carefully remove product from packaging and keep the packaging of all hardware kits until the installation is complete.
- *Check and Inspect all parts are present, and if there is any damage. Please read the Thank you card and contact us by email for any missing parts or damage.

PREPARATION

- *Prior to installation, please consult local building codes and ensure conformity of compliance standards.
- *Before beginning to assemble the product, make sure all parts are present. Compare parts with package contents list as shown in the installation manual.
- *If any parts is missing or damaged, please take pictures and report the issues to supplier immediately by email as shown in the Thank you card.


LEVEL & PLUMB CONDITIONS


Bathtub curb and shower wall should be reasonably level and plumb. The "telescoping" wall jamb allows up to 1/2" out of plumb adjustment.

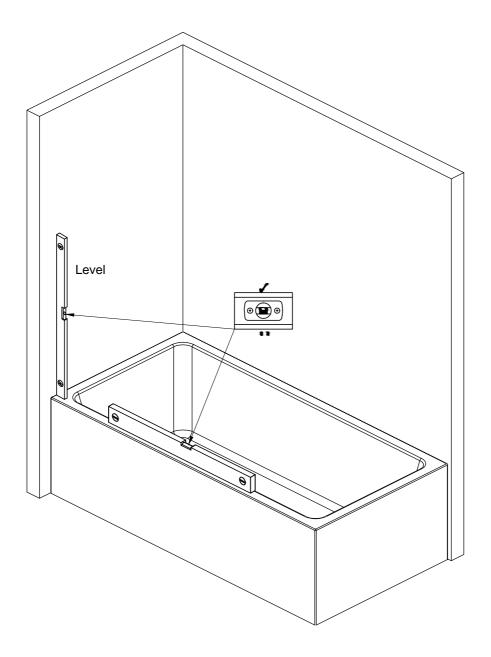

LEFT OR RIGHT BATHSCREEN INSTALLATION


Bath shield comes set up for left side installation. If you want to install it to the right side. loosen the screws on the top and bottom of the wall panel pivot aluminum (4) and then reverse or flip the panel glass. Be certain to re-tighten screws so they are secure.

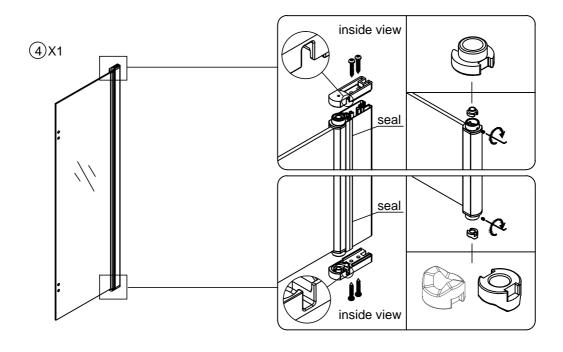

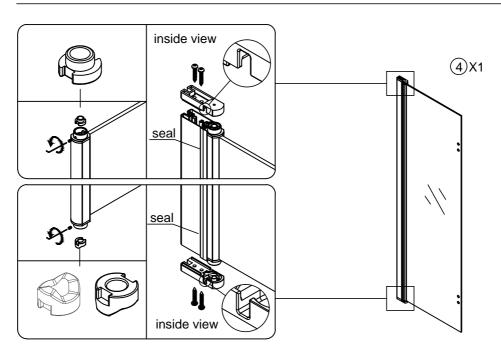


WALL JAMB INSTALLATION


- 1.Center the wall jamb to the tub curb leaving at least 1/2" to the outside edge of tub. Mark the holes' position on back side of wall jamb (2) with pencil.
- 2-3. Use a drill bit \emptyset 5/16" (\emptyset 8mm) to drill holes on the wall. Hammer in the wall anchors (1) with rubber hammer.
- 4-5. Then apply some silicone around the holes of wall anchors, and fix the wall jamb (2) with screws (5) with screw driver.

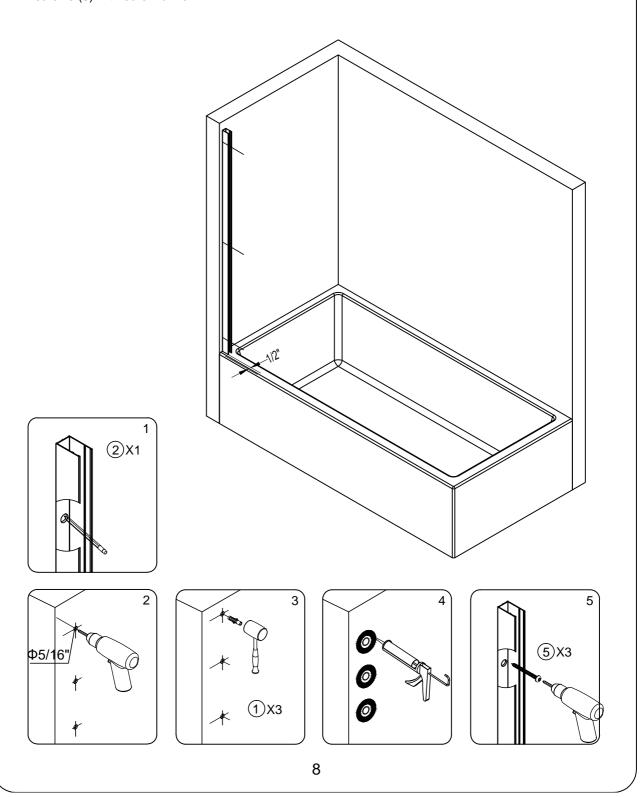



FIXED PANEL INSTALLATION

- 1.Insert the wall panel (4) into the wall jamb (2) while keeping the panel parallel to the tub curb.
- 2. Mark the hole positions on the wall jamb. Use a drill bit $\emptyset 1/8$ " ($\emptyset 3$ mm) to drill holes in the wall jamb. Secure the panel with screws (3) with a screw driver, not a drill. Then press the cap (6) on top by hand.
- 3. Press the cover (12) and cap (11) by hand on the top of wall jamb (2).

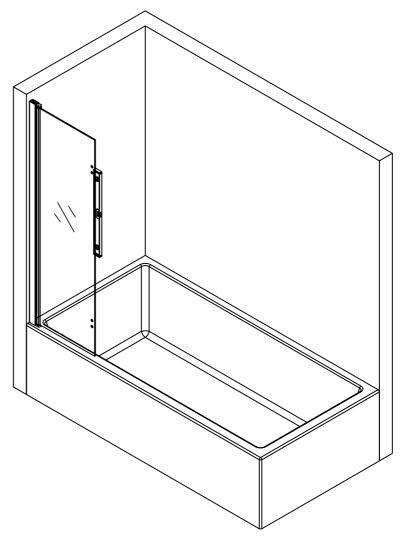










HINGE INSTALLATION

1. Obtain your helper's assistance to brace the outer panel in position. Use setting blocks to space the outer panel above the tub curb at the same height as the wall panel. Install the hinges on the wall panel and outside panel (9). Press the caps on the hinges by hand.

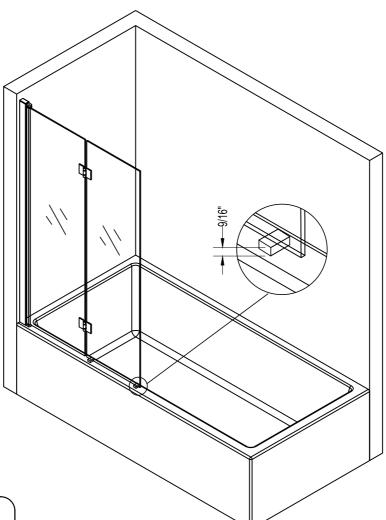








SEAL INSTALLATION


Open the bi-folding panels.


- Install the vertical seals (8) on the two panels' vertical edges.
 Install the bottom seals (10) on the two panels' bottom edges. Then trim the excess part of the bottom seals.
- 4. Attach the Silicone Pad (bumper)(14) on the outside panel glass (9).

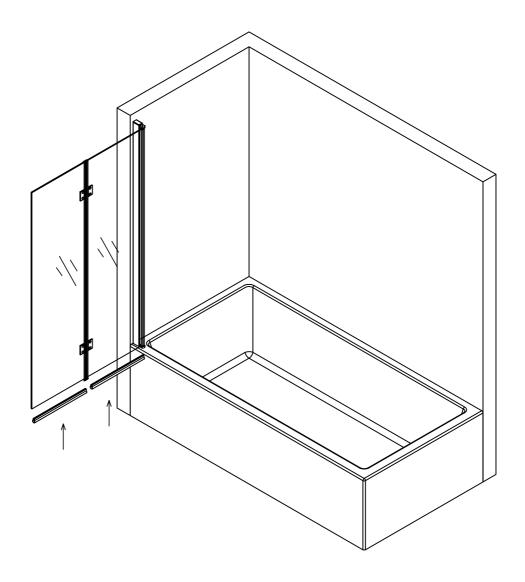










SEALING

Ensure the bath screen closes and opens smoothly.

Apply silicone around the outside and inside of wall jamb & bottom of wall jamb to help prevent water leaks.

Allow 24 hours for silicone to dry before using shower.

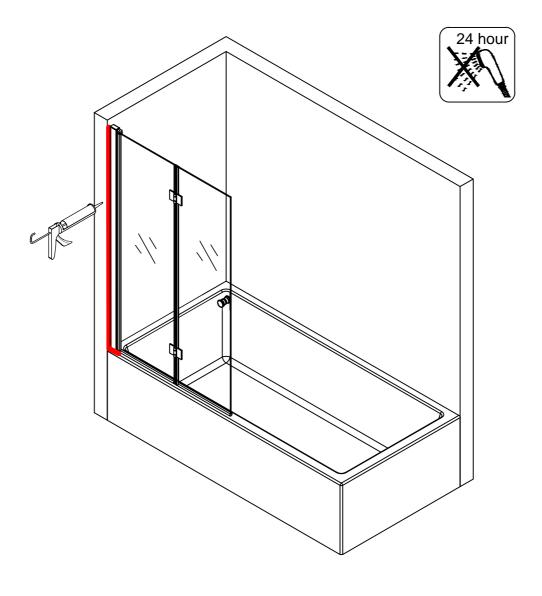

WARRANTY TERMS



Our Commitment to Top Quality Products

We at LuxWay America Inc. ("LuxWay") will stand behind our products. With over 20 years of manufacturing and marketing excellent products to the marketplace we are proud to offer a 5 - year product limited warranty for our **TRITON**, **POSEIDON**, **OAK** and **FLORA** models

We will warrant the original purchaser of the **TRITON** or **POSEIDON** or **OAK** or **FLORA** models to be free of manufacturing defects for up to 5-years from the date of purchase. If a defect is found, we will provide a replacement part or product.

Be sure to keep your proof of purchase (original sales receipt & serial number printed on the Thank You Card) as they must be made available to LuxWay for all warranty claims. The cost of returning shipping is the buyer's responsibility. Re-stocking fee (30% of Purchase value in your original Invoice) may apply for a full product replacement. Please contact customer service team by email for more details.

Non-residential Usages

Notwithstanding any other terms in this warranty, the duration of the warranty excludes non-residential, industrial, commercial, and business usage.

Special Warranty Period

Notwithstanding any other terms in this warranty, the warranty period for plastic seal strips, sweeps or any other vinyl components shall be limited to one year from the date of purchase.

Exclusions include:

LuxWay does not warrant glass for scratches, chips, water spots, breaking or any other damage after installation.

Normal wear and tear or damage from daily use are not covered. It can be expected due to naturally change over time and with normal use. This is not considered a defect and is not covered under our warranty.

Any deviation from the installation manual shall also void the warranty.

This warranty only covers the provision of replacements of parts or product, and these are the only two things covered. This warranty does not cover damage incurred because of installation, replacement, repair, improper cleaning, abuse, misuse, neglect, accident, and acts of God. Labor charges and any other kind of loss or damage are excluded.

This is LuxWay America Inc.'s exclusive warranty.

Implied warranties including that of merchantability and fitness for a particular purpose are expressly limited in duration to the duration of this warranty. LuxWay America Inc. disclaim any liability for special, incidental, or consequential damages to the extent permitted by law. The warranty is not transferable.

Some states/provinces do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of special, incidental, or consequential damages, so these limitations and exclusions may not apply to you. This warranty gives you specific legal rights. You may also have other rights which vary from state/province to state/province.