

COMPATIBILITY GUIDE

Wright Products keyed locking mortise levers are compatible with the following storm doors:

Andersen®

10 Series (Full View Interchangeable, Full View Laminated, Full View Retractable), **8 Series / 6 Series / 2000 Series / 3000 Series / 4000 Series** (Full View Interchangeable, Full View Retractable).

Larson®

Tradewinds Selection, Signature Selection, Platinum Collection, Williamsburg.

Pella®


Rolscreen (Models 3525, 3550, 3570), **Select, Venetian.**

All trademarks are property of their respective owners.

If your door is not listed, you can verify compatibility by checking the following:


1

Verify your door has a factory bored mortise hole on edge of door that is at least 5/8" by 5-3/4".

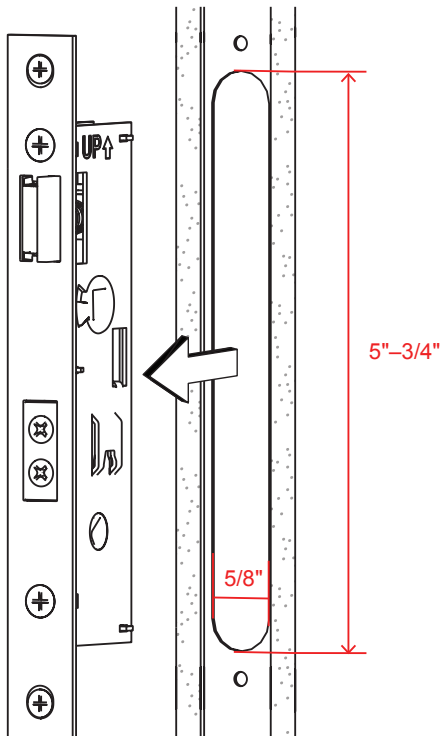


2

Verify hole to hole spacing of lockbody. Wright Products keyed locking mortise lever fits 6-15/16" – 7" hole spacing.

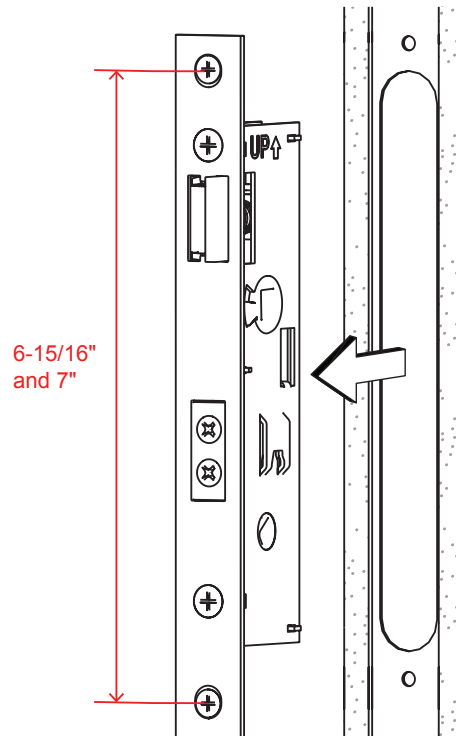


3

Verify backset. Measure from edge of door to center of crossbore. Confirm backset measures 3/4" or 1".

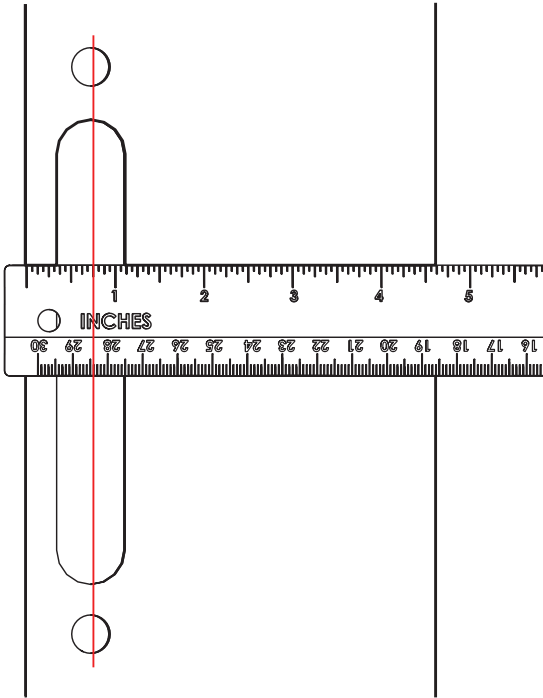


4


Verify measurements of existing door prep. If your existing door has a large crossbore hole as shown below, verify it is at least 7.75" by 0.75".

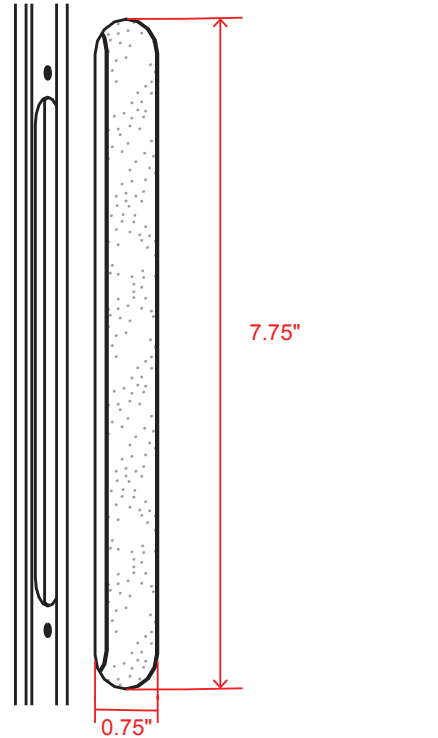

If your existing door has a large crossbore hole with two smaller holes, verify it is at least 6.5" x 0.75".

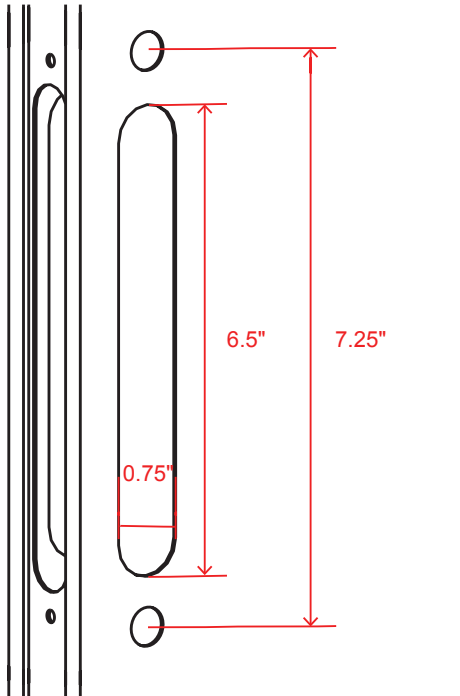

If your existing door has individual holes, verify the following dimensions.

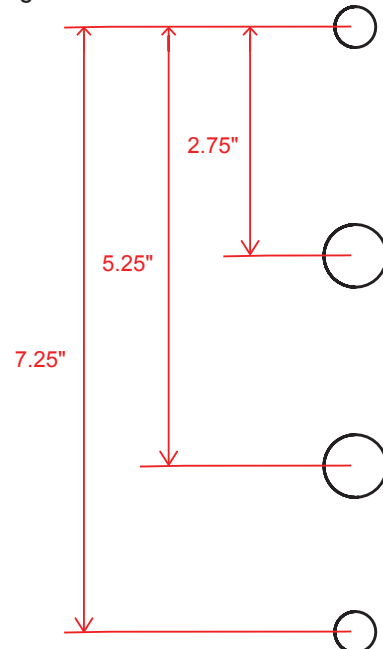

If your existing door does not meet these measurements, you can drill new holes using drill template provided with installation instructions.

However, the above steps 1-3 need to be met.

*Latch, handle and face plate styles may look different depending on model.

