




ASSEMBLY INSTRUCTION MODEL#RIV-383-BF

FRONT VIEW






All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 2- Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

How to install

- ${\it 1.} \ In stall \ the \ mounting \ plate \ to \ the \ outlet \ box \ using \\ two \ outlet \ box \ screws.$
- 2. Install backplate onto the mounting plate, and secure with the screws.
- 3. Decide the preferred length of rod. Thread it onto the bottom of socket. The metal ball on the bottom of rod is interchangeable with glass ball.
- 4. Install the fabric shade onto the candle sleeve.
- 5. Install the bulb(not included) into socket.
- 6. Thread the spacer into the center hole of fabric shade spoke. Screw metal ball or glass ball into the top of spacer.

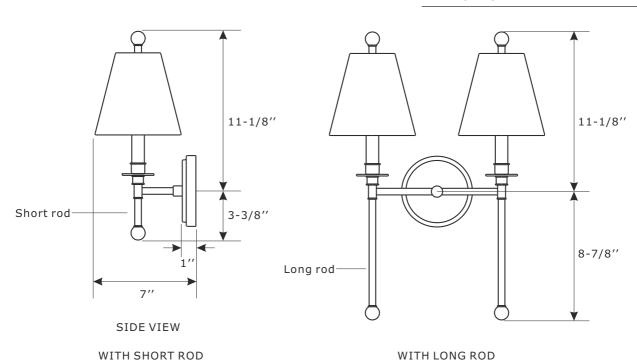





ASSEMBLY INSTRUCTION MODEL#RIV-383-BF

Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Mounting plate
- C. (1)-Backplate L4-7/8"xW4-7/8"xD1" #XRF382BFBKP4.875IN
- D. (2)-Screw
- E. (2)-Short rod L2" #XRF382BFROD2IN
- F. (2)-Long rod L7-1/2" #XRF382BFROD7.5IN
- G. (2)-Candle sleeve W7/8"xH4-1/4" #XRF382BFCDL4.25IN
- H. (2)-Fabric shade #XRF382SHA5.75IN
- I. (2)-Spacer
- J. (4)-Metal ball D1" #XRF382BFBALL
- K. (4)-Glass ball D1" #XRF382BFCRYBALL

