







3395TRM Shower/Hand Shower Trim Specification Submittal

Location:

Model Numbers	Modifications
<input type="checkbox"/> 3395TRM Shower/Hand Shower Trim Valve Options: -261 Series Temptrol® Shower Valve with TRM modifier -161 Series Temptrol Shower Valve requires TC modifier -2DIVBODYSRT	<input type="checkbox"/> 15  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> TC Test Cap Trim (includes TA-10® & T-12A) used with 161 Series Temptrol Shower Valve <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower (wand only) <input type="checkbox"/> L3 Less showerhead and hand shower (head and wand only) <input type="checkbox"/> L4 Less head, arm, and flange <input type="checkbox"/> L5 Less hand shower system <input type="checkbox"/> L7 Less handle <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish
Feature Highlights	Warranty
<ul style="list-style-type: none"> Solarity Shower/Hand Shower Trim. Requires Temptrol Pressure-Balancing Shower Valve. Separate two-function diverter. 30" Slide bar. In-line vacuum breaker. 60" flexible metal hose. Single-mode HydroMersion® showerhead. Single-mode HydroMersion hand shower wand with Non-Positive Shutoff (NPSO). Standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 	Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.
Compliance	
<ul style="list-style-type: none"> ASME® A112.18.1/CSA® B125.1 WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) Lever handle meets ADA requirements for operation CALGreen® 1.5 gpm (5.7 L/min)    	



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
3395	STN			TRM		3395STNTRM
3395	MB	L3	15	TRM	TC	3395MBL315TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Solarity Shower and Hand Shower System _____ Includes Solarity Shower/Hand Shower System for Temptrol® Pressure-Balancing Shower Valve. Features 30" slide bar, in-line vacuum breaker, 60" flexible metal hose, single-mode HydroMersion hand shower with NPSO, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead and hand shower (head and wand only), L4 = Less head, arm, and flange, L5 = Less hand shower system, L7 = Less handle, MB = Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

Dimensions

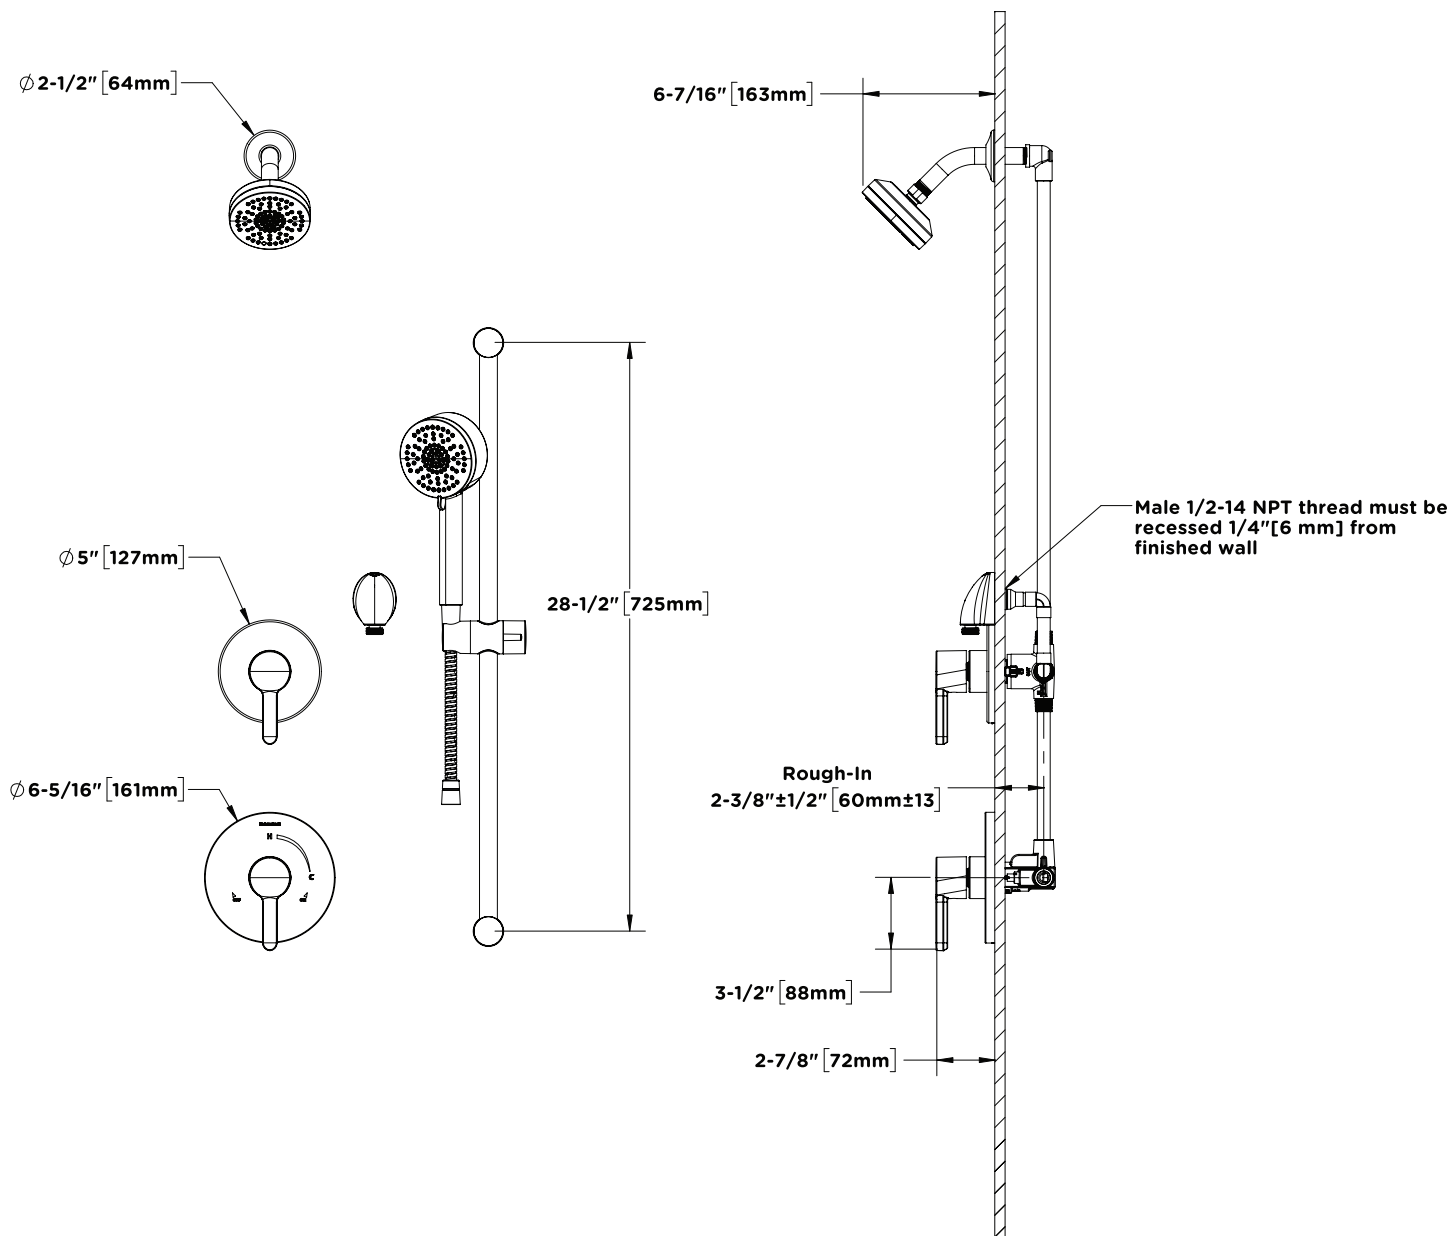

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.