

INSTALLATION INSTRUCTIONS

Flood Lighting – 1423

WARNING

**DISCONNECT POWER DURING INSTALLATION AND BEFORE SERVICING.
READ ALL INSTRUCTIONS COMPLETELY BEFORE STARTING INSTALLATION.**

SAFETY PRECAUTIONS

- Before starting the installation, disconnect the power by turning off the circuit breaker. Turning the power off by using the light switch is not sufficient to prevent electrical shock.
- Fixture is for outdoor use and should not be used in areas of limited ventilation or high-ambient temperature. All work must be done by a qualified electrician.
- Fixture should be wall mounted.
- Fixture should be located at least 12" away from any combustible materials.
- Fixture should not be recessed.


Installation-Junction Box Mounting:

Supply wire: Min 70°C when connecting wire leads in junction box Min 105°C when connecting wire leads inside the fixture.

1. Attach fixture to outdoor junction box cover.
2. Attach the cover and fixture to the box making sure that all wires are contained inside the box and that the cover is properly gasketed to prevent entrance of moisture.
3. In order to comply with established electrical code, the installer must seal the area around the mounting plate and the wall with silicone sealant to provide a watertight seal.

Mounting:

1. Rotate fixture to desired area and mount it with 2pcs of proper screws.
2. Make wire connection with supply wires in a waterproof junction box.
3. Adjust fixture to desired angle.

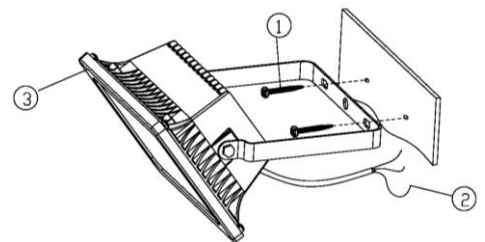

WARNING:

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. Fixtures are available in 120 to 277 volt input (not for connection to a voltage above 240Vac in Canada). Please verify before wiring fixture to field wires.