



# The Roofing Collection **Product Guide**



TruDefinition® Duration®  
Designer Colors Collection  
Sedona Canyon†

Available at





## A BEAUTIFUL DECISION.

Choose beauty...and performance too.

Owens Corning® roofing shingles do more than just protect a structure from the elements. They boast a wide selection of color blends and styles that help bring out the true beauty in your home. Best of all, they work together with Owens Corning® Roofing Accessory Products to provide the durability of the Total Protection Roofing System® — delivering great looks and protection that will last for many years to come.

With colors that range from subtle, natural hues to vibrant, eye-catching blends — and styles that include Specialty, Architectural and Traditional shingles — you're sure to find a shingle that suits you. No matter what your preference, the richly colored granules and elegant designs of Owens Corning® shingles will help bring your vision to life and add plenty of curb appeal to your home.

Choose your Owens Corning® roofing products with confidence. After all, we've been a recognized leader in the building materials industry for over 75 years. We're known for making homes comfortable, beautiful and durable. And we can do the same for you.




Specialty

**Berkshire®** Collection Shingles


\$\$\$\$\$

4


**Devonshire®** Shingles

\$\$\$\$

5

**Woodmoor® &  
Woodcrest®**  
Collection Shingles\$\$\$\$\$  
\$\$\$\$

6


**TruDefinition®  
WeatherGuard® HP** Shingles

\$\$\$\$


7



SureNail® Technology



8

**TruDefinition®  
DURATION MAX®** Shingles  
with SureNail® Technology

\$\$\$\$

9

**DURATION®** Premium Cool Shingles  
with SureNail® Technology


\$\$\$\$

10

**TruDefinition®  
DURATION® COOL** Shingles  
with SureNail® Technology

\$\$\$\$

11

**TruDefinition®  
DURATION STORM®** Shingles  
with SureNail® and WeatherGuard® Technologies

\$\$\$\$

12

**TruDefinition®  
DURATION® Designer Colors**  
Collection Shingles with SureNail® Technology

\$\$\$

13

**TruDefinition®  
DURATION®** Shingles  
with SureNail® Technology


\$\$\$

14-15

**DURATION®** Premium Shingles  
with SureNail® Technology


\$\$\$

16

**TruDefinition®  
Oakridge®** Shingles


\$\$

17

**Oakridge®** Shingles

\$\$

18-19

**Supreme®** Shingles

\$


20-21

Traditional

**Total Protection Roofing System® ^**  
& Roofing Accessory Products

22-27

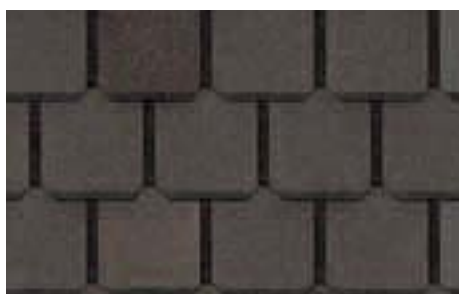

Manchester Grey<sup>†</sup>Canterbury Black<sup>†</sup>Sherwood Beige<sup>†</sup>Concord<sup>†</sup>Colonial<sup>†</sup>Sherwood Beige<sup>†</sup>

Discover the difference that **Berkshire® Collection Shingles** can make. With a thickness, proportion and color selection reminiscent of natural slate, these shingles make a unique statement. And the Berkshire® Collection proves it's as solid as it looks with a Limited Lifetime Warranty\*<sup>†</sup> (for as long as you own your home), 130-MPH Wind Resistance Limited Warranty\* and Algae Resistance Limited Warranty\*.

### Product Attributes

#### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

#### Wind Resistance Limited Warranty\*

130 MPH

#### Algae Resistance Limited Warranty\*

15 Years<sup>†</sup>

#### TruPROtection® Non-Prorated Limited Warranty\* Period

10 Years

### Berkshire® Shingles Product Specifications

Nominal Size	18-3/4-in x 38-in
Nominal Weight	360-lbs
Exposure	8-3/8-in
Shingles per Square	45
Bundles per Square	5 bundles of 9 shingles
Coverage per Square	99.5 sq ft

### Berkshire® Hip & Ridge Product Specifications

Nominal Size	12-in x 12-in
Exposure	8-in
Pieces per Carton	32
Lineal Feet per Carton	21.3

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

CSA A123.5<sup>††</sup>


Florida Product Approval

ICC-ES AC438<sup>#</sup>

Miami-Dade County Product Approval<sup>§</sup>

UL ER2453-01<sup>##</sup>

Colors available in all Service Areas.

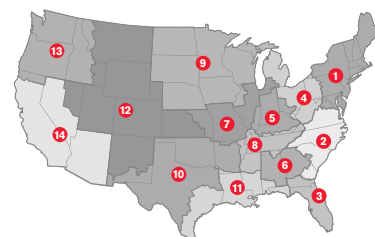

<sup>†</sup> Berkshire® Hip & Ridge is required for 15-Year Algae Resistance Limited Warranty.

<sup>††</sup> Only on product sold in Canada.

<sup>§</sup> Applies for all areas that recognize Miami-Dade Product Control Section.

<sup>#</sup> International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

<sup>##</sup> Underwriters Laboratories Evaluation Service Evaluation Report.



Tudor†



Castle†



Hearth†



Seaside Cliff†



Tudor†

Drawing inspiration from the elegant slate roofs that adorn genteel, old-world homes, **Devonshire® Shingles** are designed to reflect the allure of natural slate without high cost or heavy maintenance. Featuring a broad, sculpted shape, Devonshire® Shingles will add substance and character to your home. They offer a Limited Lifetime Warranty\* (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\* and Algae Resistance Limited Warranty\*.

### Product Attributes

#### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

#### Wind Resistance Limited Warranty\*

130 MPH

#### Algae Resistance Limited Warranty\*

10 Years

#### TruPROtection® Non-Prorated Limited Warranty\* Period

10 Years

### Devonshire® Shingles Product Specifications

Nominal Size	13-1/4-in x 40-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	100 sq ft

### ProEdge® Hip & Ridge Shingles Product Specifications

Nominal Size	12-in x 36-in
Piece Size	12-in x 12-in
Exposure	6-in
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Feet per Bundle	33-ft

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)\*\*

ASTM E108/UL 790 (Class A Fire Resistance)


Florida Product Approval

ICC-ES AC438\*

Miami-Dade County Product Approval<sup>§</sup>

UL ER2453-01\*\*

Colors available in Service Areas 1, 2, 3, 4, 5, 6, 7, 8, 9.

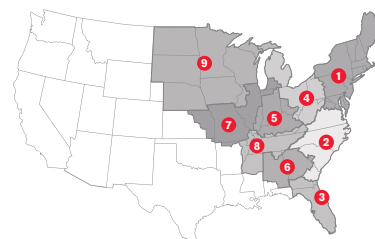

†† Not applicable for ProEdge® Hip & Ridge Shingles.

§ Applies for all areas that recognize Miami-Dade Product Control Section.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

\$\$\$\$



**Product Attributes****Warranty Length\***

Limited Lifetime\*\* (for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH\*\*

**Algae Resistance Limited Warranty\***

10 Years

**TruPROtection® Non-Prorated Limited Warranty\* Period**

10 Years

**Woodmoor® & Woodcrest® Collection****Shingles Product Specifications**

	WOODMOOR®	WOODCREST®
Nominal Size	14-1/4-in x 40-in	14-1/4-in x 40-in
Nominal Weight	465-lbs	350-lbs
Exposure	4-in	4-in
Shingles per Bundle	15	15
Bundles per Square	6	6
Coverage per Square	100 sq ft	100 sq ft

**WoodStart® Starter Shingles****Product Specifications**

Nominal Size	40-in x 13-3/8-in
Pieces per Bundle	16
Lineal Feet per Bundle	53.33

**Applicable Standards and Codes**

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)


ASTM E108/UL 790 (Class A Fire Resistance)

CSA A123.5#

ICC-ES AC438\*

UL ER2453-01\*\*

Colors available in Service Areas 7, 10, 12, 13, 14.

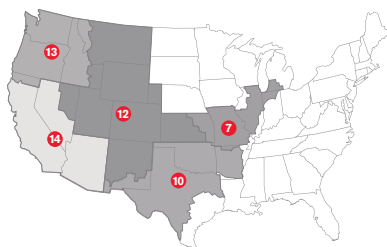

†† 130 MPH is applicable only with 6-nail application in accordance with installation instructions.

‡‡ Only on product sold in Canada.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.


## Underwriters Laboratories Evaluation Service Evaluation Report.



The natural, rustic appearance of these shingles evokes the look of wood shake. **Woodmoor® & Woodcrest® Shingles** come with a Limited Lifetime Warranty\*<sup>†††</sup> (for as long as you own your home), 110/130-MPH<sup>††</sup> Wind Resistance Limited Warranty\* and Algae Resistance Limited Warranty\*.



Carbon†

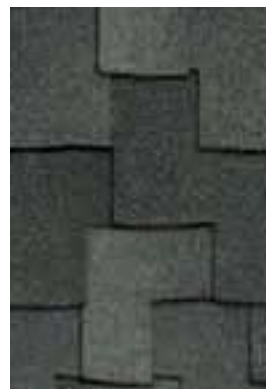

Granite†



Timber†



Chestnut†



Mesquite†



Sycamore†



Autumn Maple†  
Not available in Woodcrest® shingles  
in Service Area 7



Juniper†  
Not available in Woodcrest® shingles  
in Service Area 7



**TruDefinition® WeatherGuard® HP Impact-Resistant Shingles** are an excellent choice for homeowners concerned with the effect of severe weather on their roof. Unlike standard shingles, TruDefinition® WeatherGuard® HP Shingles are engineered with an integrated polymeric backing material that allows the shingle to meet one of the industry's highest ratings for impact resistance. In addition, they are constructed with multiple granule colors and shadowing for a unique and dramatic effect. They can also help save on deductible costs and may help homeowners qualify for insurance premium discounts.††



Desert Tan†



Brownwood†



Driftwood†



Teak†



Antique Silver†



Estate Gray†

## Product Attributes

### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

### Wind Resistance Limited Warranty\*

110/130 MPH†

### Algae Resistance Limited Warranty\*

10 Years

### TruPROtection® Non-Prorated Limited Warranty\*

10 Years

## TruDefinition® WeatherGuard® HP Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq ft

## WeatherGuard® HP


### Hip & Ridge Shingles Product Specifications

Nominal Size	12-in x 36-in
Piece Size	12-in x 12-in
Exposure	6-in
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Coverage per Bundle	33-ft

## Applicable Standards and Codes

ASTM D228
ASTM D3018 (Type 1)
ASTM D3161 (Class F Wind Resistance)
ASTM D3462
ASTM D7158 (Class H Wind Resistance)§
ASTM E108/UL 790 (Class A Fire Resistance)
Florida Product Approval
ICC-ES AC438*
UL 2218 (Class 4 Impact Resistance)†
UL ER2453-01**

Colors available in Service Areas 8, 10, 11.



†† Homeowners should check with their insurance company to see if they qualify.

‡ 130 MPH is applicable only with 6-nail application. To maintain the 130-MPH Wind Resistance Limited Warranty, each WeatherGuard® HP Hip & Ridge Shingle must be hand-sealed. Failure to hand-seal WeatherGuard® HP Hip & Ridge Shingles will reduce wind warranty to 110 MPH. Refer to installation instructions for complete details.

§ Not applicable for WeatherGuard® HP Hip & Ridge Shingles.

1 WeatherGuard® HP Hip & Ridge Shingles are required to complete UL 2218 Class 4 Impact-Resistant Roof System.

WeatherGuard® Technology U.S. Patent 6,228,785.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

\$\$\$\$







# Trust the grip of the SureNail® strip™.

There's a line between a good shingle and a great shingle.

It's the nailing line on your shingles. The difference between a good shingle and a great shingle is having SureNail® Technology.



## Excellent Adhesive Power

Helps keep the shingle layers laminated.

## Outstanding Grip

The SureNail® strip enhances the already amazing grip of our proprietary Tru-Bond® sealant for exceptional wind resistance of a 130-MPH wind warranty.\*



## Breakthrough Design

Patented SureNail® Technology<sup>††</sup> is the first and only reinforced nailing zone on the face of the shingle.

## "No Guess" Wide Nailing Zone

This tough, engineered woven-fabric strip is embedded in the shingle to create an easy-to-see strong, durable fastener zone.



## Triple Layer Protection<sup>†††</sup>

A unique "triple layer" of reinforcement occurs when the fabric overlays the two shingle layers, called the common bond area. This provides increased protection against "nail pull" from the wind.

## Double the Common Bond

SureNail® features up to a 200% wider common bond area in the nailing zone over standard shingles.



\* See actual warranty for complete details, limitations and requirements.

†† SureNail® Technology is proprietary with U.S. and foreign protection including U.S. Patent Nos. 6,471,812; 7,836,654; 8,156,704; 8,181,413; 8,240,102; 8,430,983; 8,607,521; 8,623,164; 8,752,351; 8,991,130; 9,121,178; and other patents pending.

††† The amount of Triple Layer Protection<sup>†††</sup> may vary on a shingle-to-shingle basis. SureNail® Technology is not a guarantee of performance in all weather conditions. SureNail® Technology is available only on Owens Corning Duration® Series Shingles. Tru-Bond® is a proprietary premium weathering-grade asphalt sealant that is blended by Owens Corning.



## Product Attributes

### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

### Wind Resistance Limited Warranty\*

130 MPH

### TruPROtection® Non-Prorated Limited Warranty\* Period

10 Years

## TruDefinition® Duration MAX® Shingles

### Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq ft

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

ICC-ES AC438#

UL ER2453-01\*\*

### DecoRidge® Hip & Ridge Shingles

### Product Specifications

	8-in	10-in
Exposure	8-in	8-in
Pieces per Carton	30	30
Lineal Feet per Carton	20-ft	20-ft

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)


ASTM D3462

ASTM E108/UL 790 (Class A Fire Resistance)

ICC-ES AC438#

UL ER2453-01\*\*

Colors available in Service Areas 13, 14.

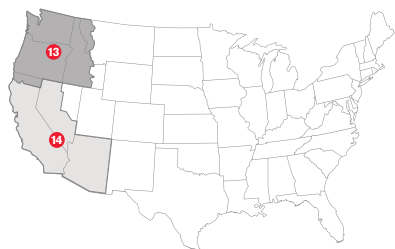

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.




Granite†



Smokey Mountain†

**TruDefinition® Duration MAX® Shingles** combine the bold, thick appearance of a wood shingle with the strength and durability of patented SureNail® Technology to deliver both dramatic beauty and peak performance. They offer a Limited Lifetime Warranty\*/\*/\* (for as long as you own your home) and a 130-MPH Wind Resistance Limited Warranty\*.

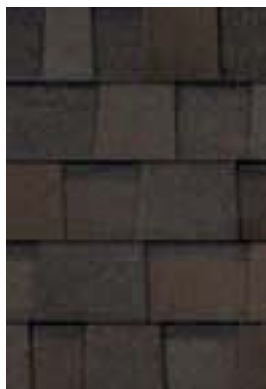

Mesquite†



Smokey Mountain†



Mahogany†



Sycamore†



Granite†



Carbon†



### Duration® Premium Cool Shingles with patented SureNail® Technology

feature granules that reflect solar energy, which helps keep roofs cooler and may result in lower energy consumption and extended roof life. These shingles are ENERGY STAR® qualified and rated by the Cool Roof Rating Council (CRRC). In addition, Duration® Premium Cool Shingles feature a Limited Lifetime Warranty\*/\*\* (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\*.



Similar to the energy-efficient appliances in your home, roofing products can provide energy-saving qualities. Owens Corning® ENERGY STAR® qualified shingles can help reduce your energy bills when installed properly. These shingles reflect solar energy, decreasing the amount of heat transferred to a home's interior — and the amount of air conditioning needed to keep it comfortable. Actual savings will vary based on geographic location and individual building characteristics.



Frosted Oak†




Harbor Fog†



Sage†



Sunrise†

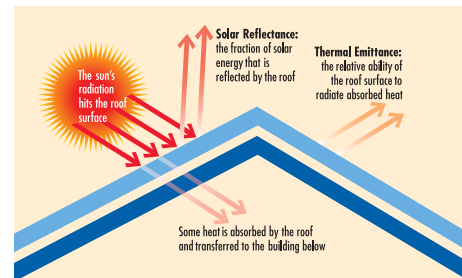

Duration® Premium Cool Shingles feature solar reflecting granules that help keep roofs up to 10°F cooler for a more comfortable living space below.\*

### Product Attributes

#### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

#### Wind Resistance Limited Warranty\*

130 MPH

#### Algae Resistance Limited Warranty\*

10 Years

#### TruPROtection® Non-Prorated Limited Warranty\* Period

10 Years

### Duration® Premium Cool Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq ft

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)


Florida Product Approval

ICC-ES AC438\*

UL ER2453-01\*\*

ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Colors available in all Service Areas.

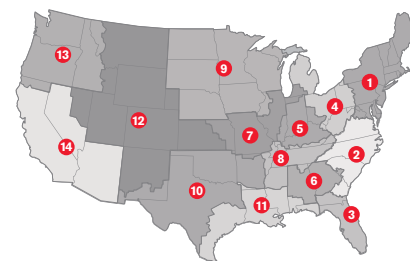

† Estimated roof surface temperature reduction based on 1998 NIST study, *Analytical Study of Residential Buildings with Reflective Roofs*. A temperature reduction is representative of a change from a typical roof to a Cool Roof (solar reflectance 15 to 25) in most climates.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

\*\* Underwriters Laboratories Evaluation Service Evaluation Report.

\$\$\$\$







**TruDefinition® Duration® Cool Shingles with patented SureNail® Technology** feature granules that reflect solar energy and have color depth like no other. The solar reflection helps keep roofs cooler and may result in lower energy consumption and extended roof life. These shingles are rated by the Cool Roof Rating Council (CRRC). In addition, feature a Limited Lifetime Warranty\*/\*\* (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\*, and an Algae Resistance Limited Warranty\*.

## Product Attributes

### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

### Wind Resistance Limited Warranty\*

130 MPH

### Algae Resistance Limited Warranty\*

10 Years

### TruPROtection® Non-Prorated Limited Warranty\*

10 Years

## TruDefinition® Duration® COOL Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq ft

## Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462


ASTM D7158 (Class H Wind Resistance)<sup>†</sup>

ASTM E108/UL 790 (Class A Fire Resistance)


ICC-ES AC438\*

UL ER2453-01\*\*


Colors available in Service Areas 14.

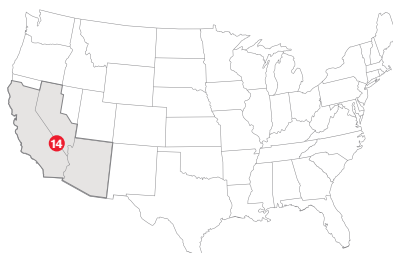

Forest Brown<sup>†</sup>

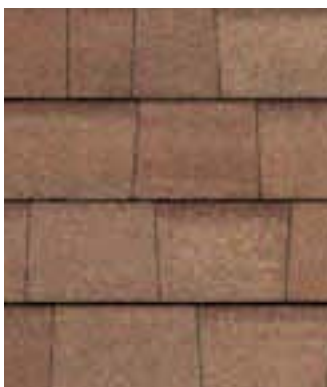

Mojave<sup>†</sup>

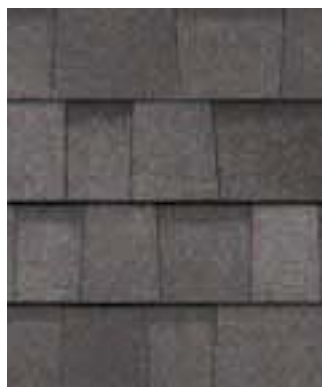

Mountainside<sup>†</sup>



Summerwood<sup>†</sup>

\$\$\$\$



# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.  
## Underwriters Laboratories Evaluation Service Evaluation Report.





**TruDefinition® Duration STORM® Impact-Resistant Shingles** with patented WeatherGuard® Technology are the ideal premium shingle choice for homeowners concerned with the effect of severe weather on their roof. In fact, homeowners may qualify for insurance premium discounts.†

TruDefinition® Duration STORM® Shingles feature SureNail® Technology with Triple Layer Protection® and an integrated polymeric backing material that allows them to meet one of the industry's highest ratings for impact resistance. This shingle and corresponding ProEdge STORM® Impact-Resistant Hip & Ridge Shingles<sup>§</sup> are designed for outstanding holding power against the high winds of severe storms — up to 130 MPH.\*††

## Product Attributes

### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

### Wind Resistance Limited Warranty\*

130 MPH††

### Algae Resistance Limited Warranty\*

10 Years

### TruPROtection® Non-Prorated Limited Warranty\*

10 Years

## TruDefinition® Duration STORM® Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq ft

## ProEdge STORM® Hip & Ridge Shingles Product Specifications

Nominal Size	12-in x 36-in
Piece Size	12-in x 12-in
Exposure	6-in
Shingles per Bundle	22
Pieces per Shingle/Bundle	3/66
Lineal Coverage per Bundle	33-ft

## Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)<sup>1</sup>

ASTM E108/UL 790 (Class A Fire Resistance)


CSA A123.5<sup>2</sup>

ICC-ES AC438<sup>#</sup>


UL 2218 (Class 4 Impact Resistance)<sup>§</sup>

UL ER2453-01<sup>##</sup>

Colors available in Service Areas 4, 5, 7, 9, 12.

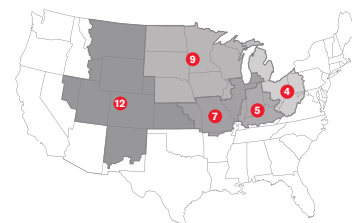


- † Homeowners should check with their insurance company to see if they qualify.  
 †† To maintain the 130-MPH Wind Resistance Limited Warranty, each ProEdge STORM® Hip & Ridge Shingle must be hand-sealed. Failure to hand seal will reduce wind warranty to 110 MPH for the ProEdge STORM® Hip & Ridge Shingle. Refer to the installation instructions for complete details.  
 § ProEdge STORM® Hip & Ridge Shingles are required to complete UL 2218 Class IV Impact-Resistant Roof System.  
 1 Not applicable for ProEdge STORM® Hip & Ridge Shingles.  
 2 Only on product sold in Canada.  
 WeatherGuard® Technology U.S. Patent 6,228,785.  
 # International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.  
 ## Underwriters Laboratories Evaluation Service Evaluation Report.

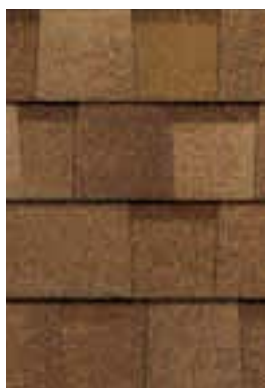

Desert Tan†



Brownwood†

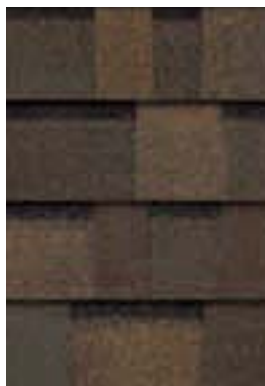

Teak†



Driftwood†



Onyx Black†




Estate Gray†



Antique Silver†



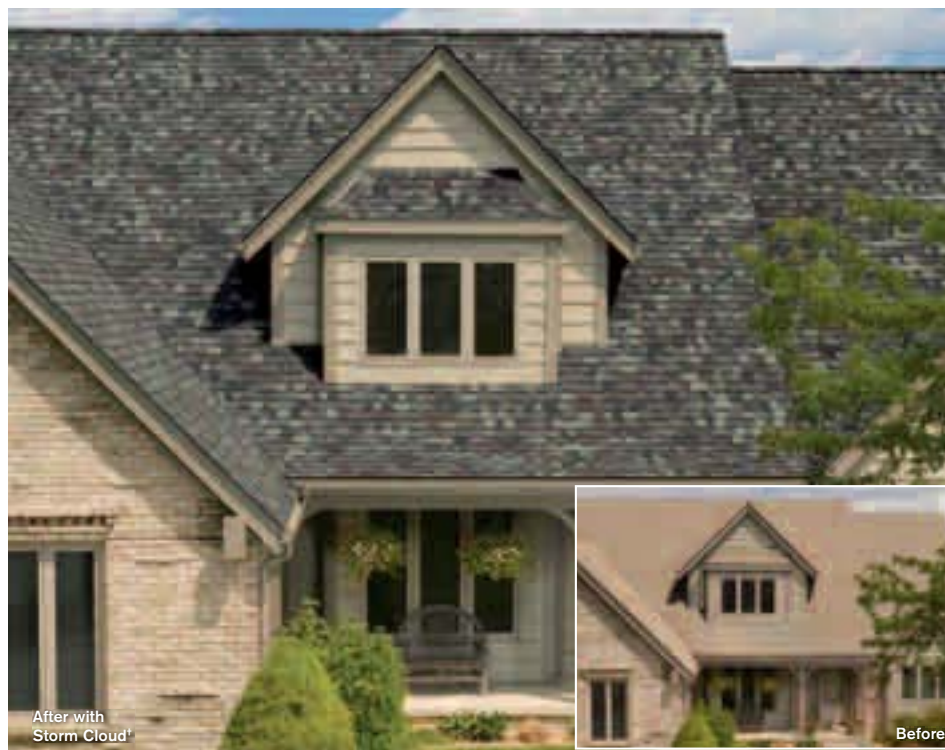


Bright. Bold. Brilliant. The world is full of color. From the cars we drive to the appliances we buy, we have the power to choose the colors we surround ourselves with. If you're looking to make a truly vibrant impact, don't overlook the power of using color on the roof to help coordinate exterior accents like paint, trim and even landscaping. **TruDefinition® Duration® Designer Colors Collection Shingles** can bring it all together — helping to improve your structure's aesthetics and perceived value — with remarkable vibrancy and colors you won't find anywhere else.

TruDefinition® Duration® Designer Colors Collection Shingles feature the high-performance and durability of patented SureNail® Technology with Triple Layer Protection® and excellent adhesive power. Plus, they boast a Limited Lifetime Warranty\* (for as long as you own your home) and can stand up to 130-MPH\* winds.

Whether you're looking to add more drama or a knockout new look, you'll be amazed at the difference that TruDefinition® Duration® Designer Colors Collection Shingles can make — they offer brilliant impact and curb appeal like you never imagined. And when exterior elements work in harmony, the look will be vibrant, cohesive and undeniably spectacular.

### Owens Corning® Hip & Ridge Shingles

Hip & Ridge Shingles are uniquely color matched to the TruDefinition® Duration® Designer Colors Collection Shingles. The multiple color blends are only available from Owens Corning Roofing and offer a finished look for the roof.

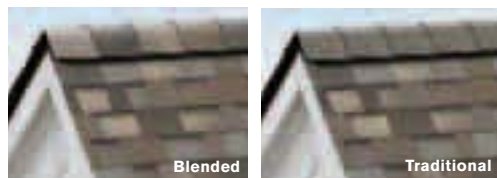

### Product Attributes

#### Warranty Length\*

Limited Lifetime\*\*  
 (for as long as you own your home)

#### Wind Resistance Limited Warranty\*

130 MPH

#### Algae Resistance Limited Warranty\*

10 Years

#### TruPROtection® Non-Prorated Limited Warranty\* Period

10 Years

### TruDefinition® Duration® Designer Colors Collection Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq ft

### Applicable Standards and Codes

ASTM D228
ASTM D3018 (Type 1)
ASTM D3161 (Class F Wind Resistance)
ASTM D3462
ASTM D7158 (Class H Wind Resistance)
ASTM E108/UL 790 (Class A Fire Resistance)
ICC-ES AC438*
UL ER2453-01**




Aged Copper†



Merlot†




Sedona Canyon†



Summer Harvest†



Sand Dune†




Storm Cloud†



Pacific Wave†

Colors available in Service Areas 1, 2, 3, 4, 5, 6, 7, 9, 10, 11, 12, 13, 14.

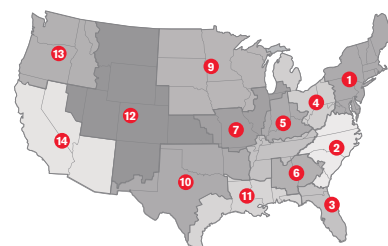

† Applies for all areas that recognize Miami-Dade Product Control Section.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

\$\$\$





Brownwood†

**TruDefinition® Duration® Shingles** with patented SureNail® Technology are specially formulated to provide great contrast and dimension to any roof. Through the use of multiple granule colors and shadowing, they deliver an exclusive combination of color and depth that makes them like no other. TruDefinition® Duration® Shingles are available in popular colors and feature a Limited Lifetime Warranty\*\*\* (for as long as you own your home), 130-MPH Wind Resistance Limited Warranty\* and Algae Resistance Limited Warranty\* available on a regional basis.

### Product Attributes

#### Warranty Length\*

Limited Lifetime\*\*  
(for as long as you own your home)

#### Wind Resistance Limited Warranty\*

130 MPH

#### Algae Resistance Limited Warranty\*

10 Years

#### TruPROtection® Non-Prorated Limited Warranty\* Period

10 Years



Algae resistance  
available in areas  
shown in white.

### TruDefinition® Duration® Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq ft

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

Florida Product Approval


ICC-ES AC438\*

Miami-Dade County Product Approval†

UL ER2453-01\*\*

Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRCC).

Color availability varies by Service Area.

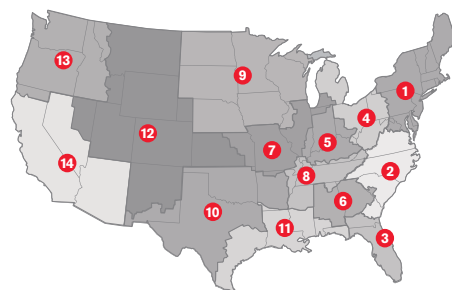

\* Applies for all areas that recognize Miami-Dade Product Control Section.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.



## TruDefinition® Duration® National Colors




Desert Tan†



Brownwood†



Driftwood†

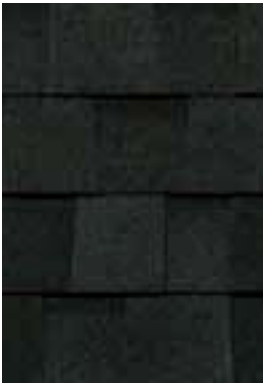

Onyx Black†



Estate Gray†




Chateau Green†



Harbor Blue†

## TruDefinition® Duration® Regional Colors (See Map)

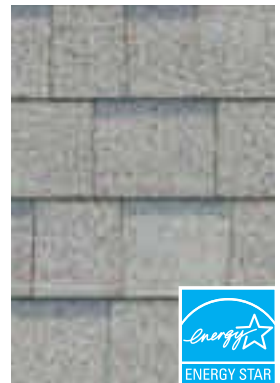Amber†  
Not available in  
Service Areas 2, 6, 8, 13.Teak†  
Not available in  
Service Area 3.Antique Silver†  
Not available in Service Areas  
1, 2, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13.Slatestone Gray†  
Not available in Service Areas  
3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14.Sierra Gray†  
Not available in Service Areas  
2, 3, 6, 8.Oyster Shell†  
Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13.Williamsburg Gray†  
Not available in Service Areas  
1, 3, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.Colonial Slate†  
Not available in Service Areas  
2, 3, 6, 8, 12, 13, 14.Shasta White†  
Not available in  
Service Area 8.Quarry Gray†  
Not available in Service Areas  
8, 10, 11.Terra Cotta†  
Not available in  
Service Area 13.

**Product Attributes****Warranty Length\***

Limited Lifetime\*\*  
(for as long as you own your home)

**Wind Resistance Limited Warranty\***

130 MPH

**Algae Resistance Limited Warranty\***

10 Years

**TruPROtection® Non-Prorated Limited Warranty\* Period**

10 Years



Algae Resistance available in  
areas shown in white.

**Duration® Premium Shingles**  
**Product Specifications**

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	4
Coverage per Square	98.4 sq ft

**Applicable Standards and Codes**

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

ICC-ES AC438\*

UL ER2453-01\*\*



Teak†

**Duration® Premium Shingles** with patented SureNail® Technology have it all — bold, thick, dimensional appearance with impressive durability. These beautiful and long-lasting shingles carry a Limited Lifetime Warranty\*/\*\* (for as long as you own your home), a 130-MPH Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\* available on a regional basis.

Colors available in Service Areas 13, 14.



Desert Tan†




Brownwood†



Teak†



Driftwood†

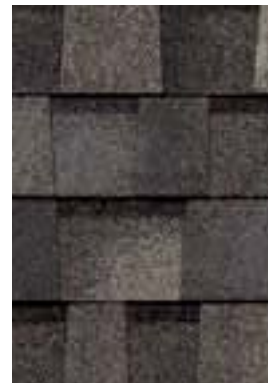

Estate Gray†



Onyx Black†

\$\$\$

# International Code Council Evaluation Services Acceptance  
Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.







**TruDefinition® Oakridge® Shingles** feature the bold contrast and deep dimension of TruDefinition® color. They include a Limited Lifetime Warranty\*\* (for as long as you own your home), a 110/130-MPH Wind Resistance Limited Warranty\*†† and an Algae Resistance Limited Warranty\*.


### TruDefinition® Oakridge® Regional Colors (See Map)




**Antique Silver†**  
 Not available in Service Areas 2, 6, 8, 10, 11.




**Teak†**  
 Not available in Service Areas 2, 3, 6.



**Williamsburg Gray†**  
 Not available in Service Areas 3, 8, 10, 11.



**Shasta White†**  
 Not available in Service Areas 2, 6, 10, 11.



**Flagstone†**  
 Not available in Service Areas 3, 8, 10, 11.



**Twilight Black†**  
 Not available in Service Areas 3, 8, 10, 11.

### TruDefinition® Oakridge® National Colors



**Brownwood†**




**Estate Gray†**



**Driftwood†**



**Beachwood Sand†**  
 Not available in Service Areas 2, 6, 8, 10, 11.




**Peppermill Gray†**  
 Not available in Service Area 3, 8, 10, 11.



**Chateau Green†**  
 Not available in Service Areas 2, 3, 6, 10, 11.




**Desert Tan†**



**Onyx Black†**

Color availability varies by Service Area.



### Product Attributes

#### Warranty Length\*

Limited Lifetime\*\* (for as long as you own your home)

#### Wind Resistance Limited Warranty\*

110/130 MPH††

#### Algae Resistance Limited Warranty\*

10 Years

#### TruPROtection® Non-Prorated Limited Warranty\*

10 Years

### TruDefinition® Oakridge® Shingles Product Specifications

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq ft

§ Applicable only in Service Area 3.

§§ Applies for all areas that recognize Miami-Dade Product Control Section.

†† 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application and Owens Corning® Starter Shingle product application in eaves and rakes in accordance with installation instructions.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

### Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

Florida Product Approval§

ICC-ES AC438#

Miami-Dade County Product Approval§§

UL ER2453-01\*\*

Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

\$\$


## Oakridge® Shingles in Traditional Colors.





Driftwood†

**Oakridge® Shingles** are designed to provide long-lasting performance and striking beauty. In addition to a wide range of inviting, popular colors, they also offer a Limited Lifetime Warranty<sup>\*/\*\*</sup> (for as long as you own your home), a 110/130-MPH<sup>††</sup> Wind Resistance Limited Warranty<sup>\*</sup> and an Algae Resistance Limited Warranty<sup>\*</sup> available on a regional basis.

## Oakridge® National Colors

Desert Tan<sup>†/††</sup>

Brownwood†

Driftwood<sup>†/††</sup>


Onyx Black†

Estate Gray<sup>†/††</sup>


## Oakridge® Regional Colors (See Map)

Amber<sup>†</sup>

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 11, 13.

Antique Silver<sup>†</sup>

Not available in Service Areas  
1, 2, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13.

Teak<sup>†</sup>

Not available in Service  
Areas 1, 3.

Sierra Gray<sup>†/††</sup>

Not available in Service Areas  
2, 3, 6, 8, 11.

Williamsburg Gray<sup>†</sup>


Not available in Service Areas  
1, 3, 4, 5, 7, 8, 9, 10,  
11, 12, 13, 14.

Chateau Green<sup>†</sup>

Not available in Service Areas  
1, 2, 3, 6, 8, 12, 13, 14.

Beachwood Sand<sup>†</sup>

Not available in Service Areas  
1, 2, 4, 5, 6, 7, 8, 9, 10,  
11, 12, 13, 14.

Shasta White<sup>†</sup>


Not available in Service Areas  
2, 3, 6, 8.






**Enhanced colors and bold designs.**


**Oakridge® Shingles** are specially designed to provide a unique blend of artistry and craftsmanship that will give your home a look that is anything but ordinary. Blacks and grays are rich and warm, earth tones capture the vibrancy of nature's brightest hues, and bold color combinations help enhance a wide variety of exterior accents and landscaping.

**Aged Cedar†**


Not available in Service Areas  
2, 3, 6, 8.

**Black Walnut†**


Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 14.

**Flagstone†**


Not available in Service Areas  
2, 3, 6, 8.

**Peppermill Gray†**

Not available in Service Area  
2, 3, 6, 8.

**Sand Castle†**

Not available in Service Areas  
2, 3, 6, 8, 12, 13.

**Woodland Path†**

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 14.

**Twilight Black†**

Not available in Service Areas  
2, 3, 6, 8, 12, 13.

**Oyster Shell†**

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11,  
12, 13.

**Product Attributes****Warranty Length\***

Limited Lifetime\*\*  
(for as long as you own your home)

**Wind Resistance Limited Warranty\***

110/130 MPH††

**Algae Resistance Limited Warranty\***

10 Years

**TruPROtection® Non-Prorated Limited Warranty\***

10 Years



Algae Resistance available in  
areas shown in white.

**Oakridge® Shingles Product Specifications**

Nominal Size	13-1/4-in x 39-3/8-in
Exposure	5-5/8-in
Shingles per Square	64
Bundles per Square	3
Coverage per Square	98.4 sq ft

**Applicable Standards and Codes**

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

Florida Product Approval§

ICC-ES AC438®

Miami-Dade County Product Approval§§

UL ER2453-01\*\*

Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

†† 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application and Owens Corning® Starter Shingle product application in eaves and rakes in accordance with installation instructions.

§ Applicable only in Service Area 3.


§§ Applies for all areas that recognize Miami-Dade Product Control Section.

\*\* Available in Algae Resistance in Service Area 13 (see map).

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

Colors availability varies by Service Area.


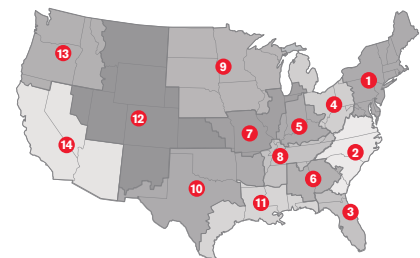


\$\$



Three-tab shingles offer a solid value with curb appeal and lasting durability. Constructed of durable weathering-grade asphalt and a tough Fiberglas™ mat core, **Supreme® Shingles** come with a 25-Year Limited Warranty\*, a 60-MPH Wind Resistance Limited Warranty\* and an Algae Resistance Limited Warranty\* available on a regional basis.

### Supreme® National Colors

Desert Tan<sup>†/††</sup>Autumn Brown<sup>†</sup>Brownwood<sup>†</sup>Driftwood<sup>†/††</sup>Onyx Black<sup>†</sup>Estate Gray<sup>†/††</sup>Aspen Gray<sup>†</sup>Shasta White<sup>†</sup>



## Supreme® Regional Colors (See Map)



Amber†

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 13.



Beachwood Sand†

Not available in Service Areas  
1, 2, 4, 5, 7, 8, 9, 10, 11, 12,  
13, 14.



Weathered Wood†

Not available in Service Areas  
1, 4, 9, 12, 13, 14.



Bark Brown†

Not available in Service Areas  
1, 2, 3, 6, 8, 10, 11, 12, 13, 14.



Teak†

Not available in Service Areas  
1, 2, 3, 9, 12, 13, 14.



Antique Silver†

Not available in Service Areas  
1, 2, 4, 5, 7, 8, 9, 10, 11, 12, 13.



Chapel Gray†

Not available in Service Areas  
1, 2, 3, 6, 8, 10, 11, 12, 13, 14.



Williamsburg Gray†

Not available in Service Areas  
1, 3, 4, 5, 7, 8, 9, 10, 11, 12, 13, 14.



Oxford Gray†

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 9, 12, 13, 14.



Spanish Red†

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 12,  
13, 14.



Forest Green†

Not available in Service Areas  
1, 2, 3, 4, 5, 6, 7, 8, 9, 12, 13, 14.



Chateau Green†

Not available in Service Areas  
10, 11, 12, 13, 14.

## Product Attributes

## Warranty Length\*

25-Year Limited

## Wind Resistance Limited Warranty\*

60 MPH

## Algae Resistance Limited Warranty\*

10 Years

## TruPROtection® Non-Prorated Limited Warranty\* Period

5 Years



Algae Resistance available in  
areas shown in white.

## Supreme® Shingles Product Specifications

	IMPERIAL	METRIC††
Nominal Size	12-in x 36-in	13-1/4-in x 39-3/8-in
Exposure	5-in	5-5/8-in
Shingles per Square	80	65
Bundles per Square	3	3
Coverage per Square	100 sq ft	99.98 sq ft

## Applicable Standards and Codes

ASTM D228

ASTM D3018 (Type 1)

ASTM D3161 (Class F Wind Resistance)

ASTM D3462

ASTM D7158 (Class H Wind Resistance)

ASTM E108/UL 790 (Class A Fire Resistance)

Florida Product Approval§


ICC-ES AC438\*

Miami-Dade County Product Approval†

UL ER2453-01\*\*

Shasta White color meets ENERGY STAR® requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRC).

Color availability varies by Service Area.

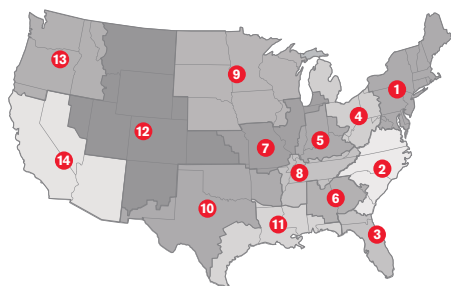

‡‡ Available in Algae Resistance in Service Area 13 (see map).

†† Available only in Service Areas 13 and 14 (see map).

§ Applicable only in Service Area 3 (see map).

‡ Applies for all areas that recognize Miami-Dade Product Control Section.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

\*\* Underwriters Laboratories Evaluation Service Evaluation Report.



## TOTAL PROTECTION. TOTAL CONFIDENCE™.

Our Total Protection Roofing System<sup>®</sup> integrates engineered Owens Corning<sup>®</sup> components that work together to address these three primary performance areas, critical to a high-performance roof, while also making it easy to understand the importance of each. **With Owens Corning, it's easy to confidently deliver total protection, beauty and peace of mind.**



### SEAL.

HELPS CREATE A  
WATER-PROOF BARRIER

Ice & Water  
Barrier  
Underlayment



### DEFEND.

HELPS PROTECT AGAINST  
NATURE'S ELEMENTS


Starter Shingles  
Shingles  
Hip & Ridge  
Shingles




### BREATHE.

FOR BALANCED  
ATTIC VENTILATION

Intake Vents  
Exhaust Vents

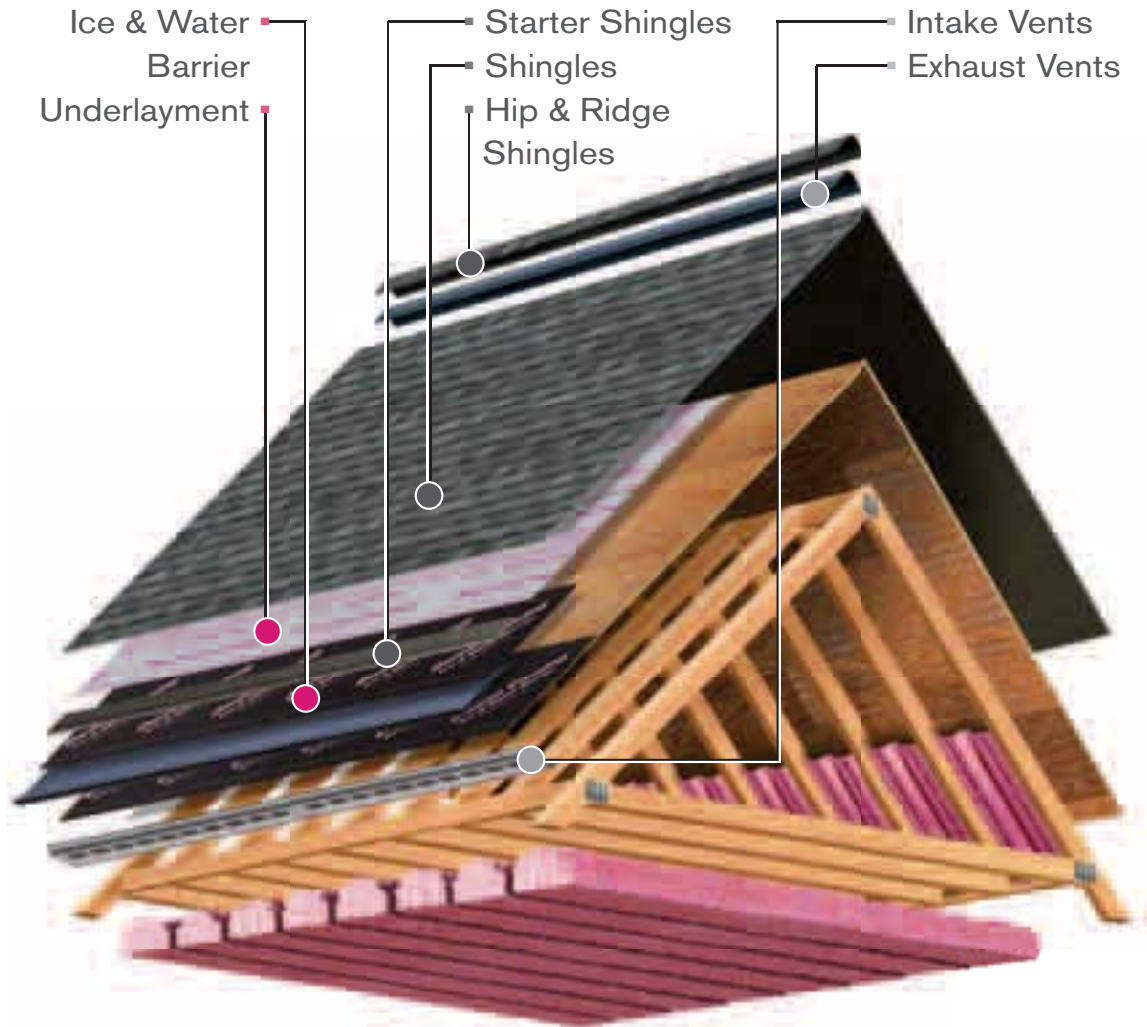





## Underlayment Products

## ICE &amp; WATER BARRIER PRODUCTS

**WeatherLock® G *Granulated* Self-Sealing Ice & Water Barrier**

- Excellent tear resistance to help avoid cracking and breaking during installation

**WeatherLock® Mat *Mat-Faced* Self-Sealing Ice & Water Barrier**

- Patented mat surface reduces slipping, sticking and scuffing

**WeatherLock® Flex *Flexible* Self-Sealing Ice & Water Barrier<sup>††</sup>**

- The high-performance flexible and pliable solution for multiple applications, including eaves, rakes, valleys, vents, and chimneys and skylights

**WeatherLock® Cold Climate *Granulated* Self-Sealing Ice & Water Barrier<sup>††</sup>**

- Specially engineered for great versatility and improved application in cold weather

**WeatherLock® Specialty Tile and Metal Self-Sealing Ice & Water Barrier<sup>††</sup>**

- Up to 90-day extended UV exposure and waterproofing barrier
- Single-layer polyester walking surface provides a slip-resistant work area
- Excellent surface for foam adhesive set and mechanically fastened roof tile application
- Withstands temperatures up to 260°F

## UNDERLAYMENT PRODUCTS

**Deck Defense® High-Performance Roof Underlayment**

- Durable synthetic construction with unique bottom surface coating that resists tearing
- Extended exposure for up to 6 months<sup>†</sup>
- Coverage of 937 sq ft per roll w/3-in overlap; 500 sq ft roll available

**ProArmor® Synthetic Roof Underlayment**

- Utilizes slip resistant **Fusion Back Coating Technology** to provide excellent grip to a roof deck which lends to a stable walking surface.
- Coverage of 929 sq ft per roll w/3-in overlap per 42-in lightweight roll

**FIBERGLAS™ Reinforced Felt Underlayment**

- Reinforced with FIBERGLAS™ to support flatter, more uniform shingle applications
- Coverage of 400 sq ft per roll

<sup>††</sup> Available regionally.

<sup>†</sup> Special application required for extreme exposure. See installation instructions.



**DEFEND.**



## Starter and Hip & Ridge Shingles

### STARTER SHINGLE PRODUCTS



#### Starter Strip Shingles<sup>††</sup>

- Packaged two pieces per shingle, 16 shingles per bundle, 100 lineal ft
- Compatible with any shingle with an exposure of up to 6-in



#### Starter Strip Plus Shingles<sup>††</sup>

- Packaged two pieces per shingle, 16 shingles per bundle, 100 lineal ft
- Extra-wide starter can be used with any shingle that has an exposure of up to 6-in



#### Starter Shingle Roll<sup>††</sup>

- Comes in handy individual rolls measuring 7.2-in x 33-ft 4-in
- Easy peel-and-stick application

### HIP & RIDGE SHINGLES



#### DecoRidge<sup>®</sup> Hip & Ridge<sup>††</sup>

- Thick bull-nosed design offers a refined look
- Durable construction – heavyweight laminate construction with SBS-modified asphalt



#### DuraRidge<sup>®</sup> Hip & Ridge<sup>††</sup>

- The only hip and ridge shingle with the strength of patented SureNail<sup>®</sup> Technology
- High-profile and layered design that enhances the roof line
- A bold, dramatic appearance and vibrant colors that complement TruDefinition<sup>®</sup> Duration<sup>®</sup> Series Shingles



#### RIZERidge<sup>®</sup> Hip & Ridge<sup>††</sup>

- Foldable design adds dimension
- Excellent wind performance compared to cut-tab shingles
- Algae resistant



#### ProEdge<sup>®</sup> Hip & Ridge<sup>††</sup>

- Shadow line allows for distinction along the ridgeline
- Manufactured perforations and a larger exposure offer easy installation
- Pre-cut corners provide attention to detail with no cutting on site

<sup>††</sup> Available regionally.





# BREATHE.



## VentSure® Ventilation Products

### EXHAUST VENTILATION PRODUCTS

#### VentSure® 4-Foot Strip Heat & Moisture Ridge Vent

- Flat baffle, corrugated ridgeline for ultimate performance
- Easy to handle 4-ft sections
- Available in 8-in, 10-in and 12-in widths to accommodate enhanced cap shingles
- Available with an optional WeatherPROtector® Moisture Barrier
- Net free vent area per lineal ft:
  - 18 sq in with WeatherPROtector®
  - 20 sq in without WeatherPROtector®



#### VentSure® RidgeCat® Rolled Ridge Vent

- Lightweight, entangled-net structure for long lasting ventilation performance
- Breathable UV edge filter helps prevent water, dust and insect infiltration
- Low profile, straight edge for a sleek, finished look
- Net free vent area:
  - 300 sq in per roll
  - (15 sq in per lineal ft)



#### VentSure® Rigid Roll

- Easy-to-handle 20-ft rolls; end caps are provided with each roll
- Regional availability in three different widths
- Net free vent area:
  - 250 sq in per roll
  - (12.5 sq in per lineal ft)


























### INTAKE VENTILATION PRODUCTS



#### VentSure® InFlow® Vent

- Versatile design for soffitless, open-soffit and traditional roofs
- Excellent protection against wind-driven rain
- Clean, smooth profile
- Net free vent area per lineal ft:
  - 10 sq in

†† Available regionally.

Owens Corning® Shingle Collection	Shingle Construction	Shingle Construction and Description	Patented SureNail® Technology	Warranty Length*	Wind Resistance Limited Warranty*	Algae Resistance Limited Warranty*	TruPROtection® Non-Prorated Limited Warranty* Period	Nominal Size
<b>Berkshire®</b> Collection		Laminated, natural slate appearance		Limited Lifetime**/***	130 MPH	15††† Years	10 Years	18-3/4-in x 38-in
<b>Devonshire®</b>		Single layer, natural slate appearance		Limited Lifetime**/***	130 MPH	10 Years	10 Years	13-1/4-in x 40-in
<b>Woodmoor®</b> Collection		Laminated, extra thick, rustic wood shake appearance		Limited Lifetime**/***	110/130 <sup>S</sup> MPH	10 Years	10 Years	14-1/4-in x 40-in
<b>Woodcrest®</b> Collection		Laminated, thick, rustic wood shake appearance		Limited Lifetime**/***	110/130 <sup>S</sup> MPH	10 Years	10 Years	14-1/4-in x 40-in
<b>TruDefinition® WeatherGuard® HP</b>		Laminated, dimensional appearance, bold contrast, impact resistance		Limited Lifetime**/***	110/130 <sup>S</sup> MPH	10 Years	10 Years	13-1/4-in x 39- 3/8-in
<b>TruDefinition® DURATION MAX®</b>		Laminated, thick shingle appearance, bold contrast		Limited Lifetime**/***	130 MPH		10 Years	13-1/4-in x 39- 3/8-in
<b>DURATION® Premium Cool</b> 		Laminated, dimensional appearance, energy efficient		Limited Lifetime**/***	130 MPH	10 Years	10 Years	13-1/4-in x 39- 3/8-in
<b>TruDefinition® DURATION® COOL</b>		Laminated, dimensional appearance, energy efficient		Limited Lifetime**/***	130 MPH	10 Years††	10 Years	13-1/4-in x 39- 3/8-in
<b>TruDefinition® DURATION STORM®</b>		Laminated, dimensional appearance, bold contrast, impact resistance		Limited Lifetime**/***	130 MPH	10 Years	10 Years	13-1/4-in x 39- 3/8-in
<b>TruDefinition® DURATION® Designer Colors Collection</b>		Laminated, dimensional appearance, bold contrast, unique vibrant colors		Limited Lifetime**/***	130 MPH	10 Years††	10 Years	13-1/4-in x 39- 3/8-in
<b>TruDefinition® DURATION®</b>		Laminated, dimensional appearance, bold contrast		Limited Lifetime**/***	130 MPH	10 Years††	10 Years	13-1/4-in x 39- 3/8-in
<b>DURATION® Premium</b>		Laminated, dimensional appearance		Limited Lifetime**/***	130 MPH	10 Years	10 Years	13-1/4-in x 39- 3/8-in
<b>TruDefinition® Oakridge®</b>		Laminated, dimensional appearance, bold contrast		Limited Lifetime**/***	110/130 <sup>###</sup> MPH	10 Years	10 Years	13-1/4-in x 39- 3/8-in
<b>Oakridge®</b>		Laminated, dimensional appearance		Limited Lifetime**/***	110/130 <sup>###</sup> MPH	10 Years††	10 Years	13-1/4-in x 39- 3/8-in
<b>Supreme® / Supreme® Metric</b>		Single layer, three-tab appearance		25-Year Limited*	60 MPH	10 Years††	5 Years	12-in x 36-in  13-1/4-in x 39-3/8-in

\* See actual warranty for complete details, limitations and requirements.

\*\* 40-Year Limited Warranty on commercial projects.

† Only on product sold in Canada.

†† Applies for all areas that recognize Miami-Dade Product Control Section.

†† Algae Resistance available on a regional basis. Shingles are algae resistant to control the growth of algae and discoloration.

††† Berkshire® Hip & Ridge is required for 15-Year Algae Resistance Limited Warranty.



Exposure	Shingles per Square	Bundles per Square	Coverage per Square	ASTM D228	ASTM D3018 (Type 1)	ASTM D3462	ASTM D3161 (Class F Wind Resistance)	ASTM D7158 (Class H Wind Resistance)	ASTM E108/JUL 790 (Class A Fire Resistance)	CSA A123.5*	Florida Product Approval	ICC-ES AC438#	Miami-Dade County Product Approval††	UL 2218 (Class 4 Impact Resistance)	UL ER2453-01##	Cool Roofing Rating Council	ENERGY STAR <sup>§</sup> requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRCC).	Shasta White color meets ENERGY STAR <sup>§</sup> requirements for initial solar reflectance of 0.25 and 3-year aged solar reflectance of 0.15; 2013 California Building Energy Efficiency Standards, Title 24, Part 6 requirements; rated by the Cool Roof Rating Council (CRRCC).
8-3/8-in	45	5	99.5 sq ft	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓			
5-5/8-in	64	3	100 sq ft	✓	✓	✓	✓	✓	✓		✓	✓			✓			
4-in	90	6	100 sq ft	✓	✓	✓	✓	✓	✓	✓		✓			✓			
4-in	90	6	100 sq ft	✓	✓	✓	✓	✓	✓	✓		✓			✓			
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓			✓		✓	✓			
5-5/8-in	64	4	98.4 sq ft	✓	✓	✓	✓	✓	✓			✓			✓			
5-5/8-in	64	4	98.4 sq ft	✓	✓	✓	✓	✓	✓		✓	✓			✓	✓	✓	
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓			✓			✓			
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓	✓		✓		✓	✓			
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓			
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓ <sup>§§</sup>		✓
5-5/8-in	64	4	98.4 sq ft	✓	✓	✓	✓	✓	✓			✓			✓			
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓			
5-5/8-in	64	3	98.4 sq ft	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓ <sup>§§</sup>		✓
5-in 5-5/8-in	80 65	3	100 sq ft 99.98 sq ft	✓	✓	✓	✓	✓	✓		✓	✓	✓		✓	✓ <sup>§§</sup>		✓

§ 130 MPH is applicable only with 6-nail application. Refer to installation instructions for complete details.

§§ Applicable to Shasta White color only on TruDefinition® Duration®, Oakridge® and Supreme® Shingles.

# International Code Council Evaluation Services Acceptance Criteria for Alternative Asphalt Shingles.

## Underwriters Laboratories Evaluation Service Evaluation Report.

### 110 MPH is standard with 4-nail application. 130 MPH is applicable only with 6-nail application and Owens Corning® Starter Shingle product application along eaves and rakes in accordance with installation instructions.



Pub. No. 10021802. Printed in U.S.A. January 2017.

THE PINK PANTHER™ & © 1964–2017 Metro-Goldwyn-Mayer Studios Inc.  
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.  
© 2017 Owens Corning. All Rights Reserved.

† Actual colors and granule blends may vary from the photo. We suggest that you view actual product on the roof to get a better idea of the finish color. Color availability subject to change without notice. Ask your professional roofing contractor for samples of colors available in your area.

\* See actual warranty for complete details, limitations and requirements.

\*\* 40-Year Limited Warranty on commercial projects.

^ Excludes non-Owens Corning® roofing products such as flashing, fasteners and wood decking.

ENERGY STAR and the ENERGY STAR mark are registered trademarks of the U.S. Environmental Protection Agency.

SureNail® Technology is proprietary with U.S. and foreign protection including U.S. Patent Nos. 6,471,812; 7,836,654; 8,156,704; 8,181,413; 8,240,102; 8,430,983; 8,607,521; 8,623,164; 8,752,351; 8,991,130; 9,121,178; and other patents pending

#### Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.